


Disconnect Test Terminal Blocks

WTR 2.5 STB 2.3 LN

NEW

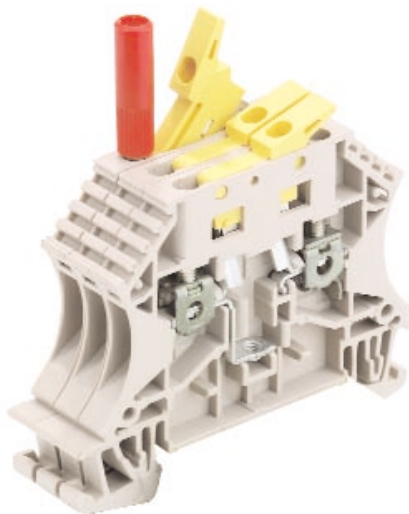

The well-known disconnect test terminal WTR 2.5 is now available with a modified disconnect lever. The new lever improves handling and ensures that the status of the terminal is clearly visible.

- Designed for test plugs
- Wemid insulating material (UL 94-V0)
Temperature resistant up to 120 °C /
Non-tracking CTI 600
- 100% vibration resistant, clamping
screw requires no re-tightening
- 2 wires of the same AWG size
can be connected

United States

W Interconnections, Inc.
821 Southlake Blvd.
Richmond, Virginia 23236
Telephone: (800) 849-9343
Facsimile: (804) 379-2593
Email: info@weidmuller.com
Website: www.weidmuller.com

Canada

W Interconnections Canada, Inc.
10 Spy Court
Markham, Ontario L3R 5H6
Telephone: (800) 268-4080
Facsimile: (905) 475-2798
Email: info1@weidmuller.ca
Website: www.weidmuller.ca

Mexico

W Interconnections, S.A. de C.V.
Ave. Ingenieros Civiles 204-B
Conjunto Industrial Chachapa
Chachapa Amozoc, Puebla
72990, Mexico
Telephone: (52) 222 286 62 47
Facsimile: (52) 222 286 62 46

Standard Disconnect Test Terminal Blocks


WTR 2.5 STB 2.3 LN



The installation instructions and reduced rating data for accessories contained in the chapter 'Ex Terminals' are to be observed for **EEX e-applications**.

(Width x length x height) with TS35x7.5	mm
Max. current / max. wire cross-section	A/mm ²
Max. clamping range	mm ²

5.1 x 60 x 51
14 / 2.5
0.13 ... 4



Technical data

Rated data	
Rated voltage, feed-through terminal	V
Rated current	A
Rated cross-section	mm ²
Rated impulse voltage / pollution degree	kV/-
Plug gauge to IEC 60 947-1 / flammability class UL94	
Approvals	

IEC 60947-7-1 / VDE 06 11

	IEC	UL	CSA	EN 50019
Rated voltage, feed-through terminal	800	300	300	
Rated current	14.0	10	10	
Rated cross-section	1.5	22..12 AWG	26..12 AWG	
Rated impulse voltage / pollution degree	8 / 3			
Plug gauge to IEC 60 947-1 / flammability class UL94	A 3 / V0			

Ordering data

Version	
dark beige Wemid	with socket contact
dark beige Wemid	without socket contact

Type	Part No.
WTR 2.5 STB 2.3 LN	1850560000

Accessories

Jumpers (pluggable)	
ZQV	pluggable jumper 2-pole
WQV	screw-type jumper 3-pole
QL	screw-type jumper 4-pole
	10-pole
	Terminal housing for jumper QL
	Retaining screw for jumper QL

Type	Current [A]	Part No.
QL 2		0215800000
QL 3		0215900000
QL 4		0216000000
QL 10		0338000000

End plate / partition	
End plate	dark beige Wemid
Partition	dark beige Wemid

Width [mm]		
WAP WDU..	1.5	1050000000

Cross-connection slide	
	2-pole
	3-pole
	4-pole
	Terminal housing for QL
	Terminal housing for QL

Width [mm]		

Analyze / test	
	Test plugs
STB 35 with	socket contact, yellow
QVS	socket contact, green
	socket contact, violet
	socket contact, blue

PS 2.3	0180400000

Other accessories	
	Disconnect lock
	Shorting plug 2-pole

Width [mm]		

Marking systems	
	Marking tags

DEK 5	WS 12/5
-------	---------

More detailed information on further accessories and application is available in our catalog.