
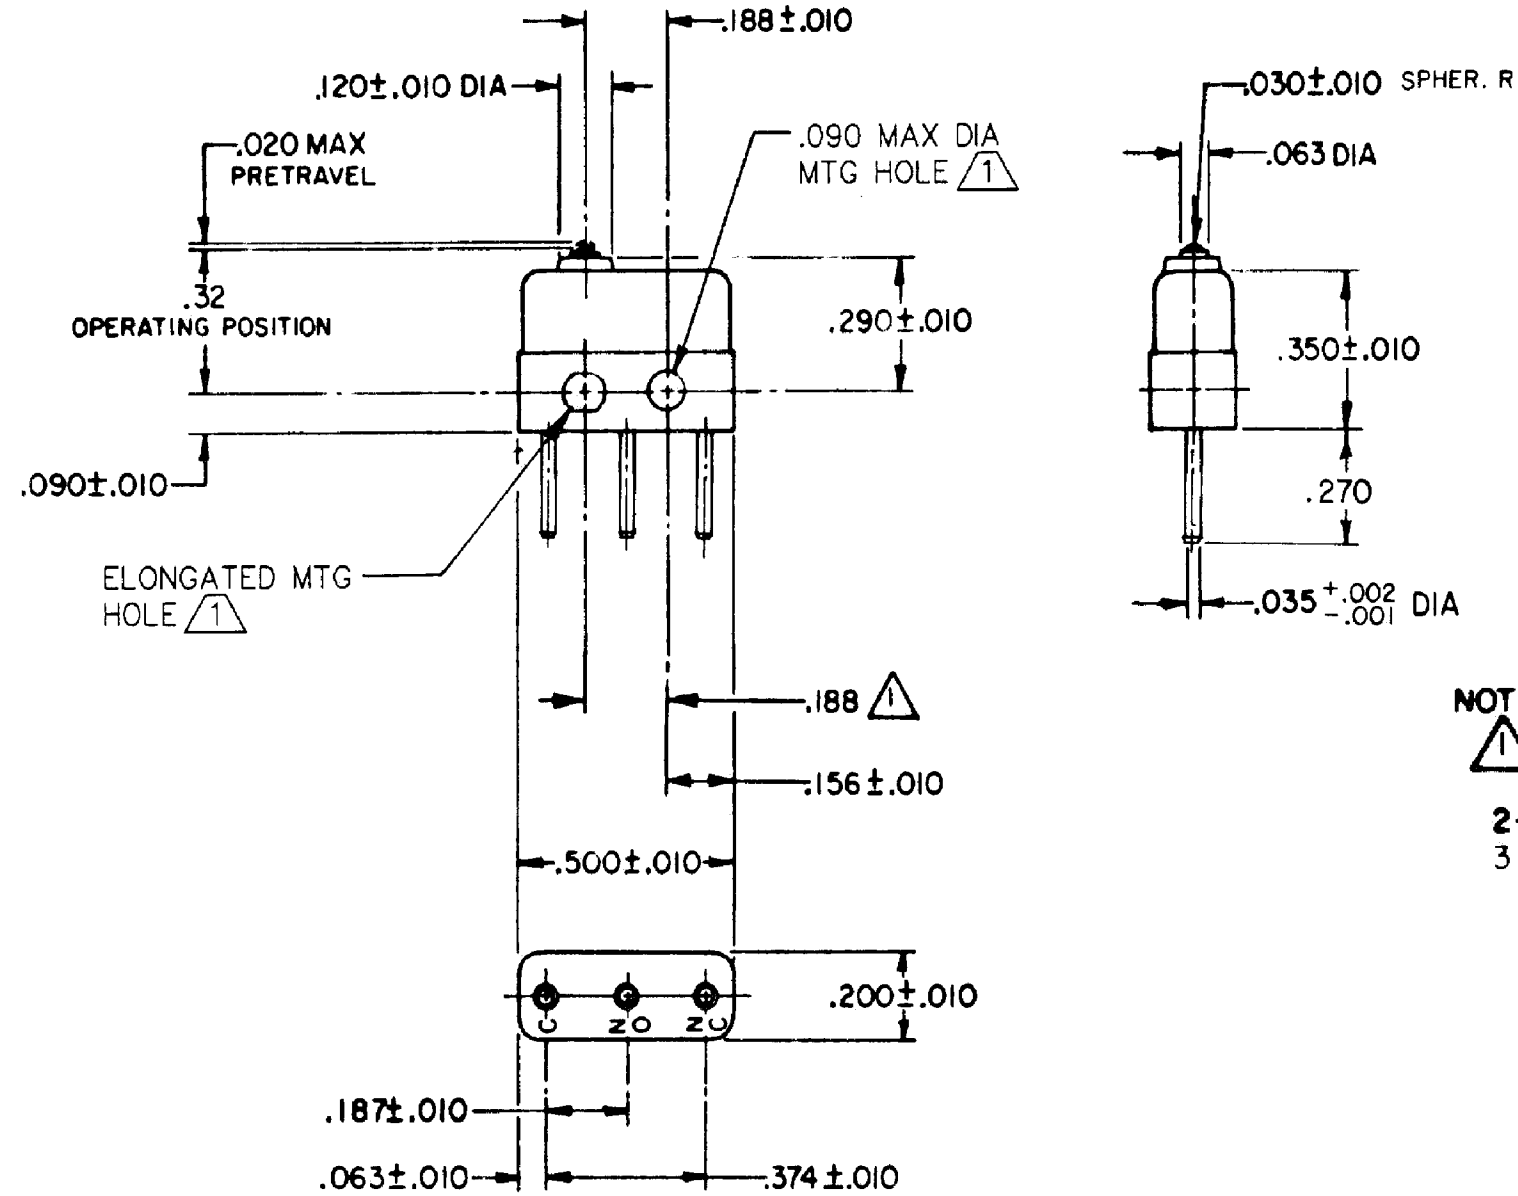


HONEYWELL PART NUMBER
21SX64
PRODUCT CODE VDM5500
JG-NUMBER JG-81339

REV	DOCUMENT	CHANGED BY	CHECK
6	0038449	VS 28APR08	BLR



NOTE -
 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
 2- TERMINALS ARE PLATED FOR SOLDERING
 3- SWITCH WILL WITHSTAND TEMPERATURE OF 185° F

RELEASE NO.	PR-7943
REPLACES	X69199-SX

CHARACTERISTICS	
OPERATING FORCE - - - -	5 OZ MAX
RELEASE FORCE - - - - -	1 OZ MIN
DIFFERENTIAL TRAVEL - - -	.005 MAX
OVERTRAVEL - - - - -	.004 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT SPDT		
28 VOLTS DC RATING		
	SEA LEVEL	50,000 FT
INDUCTIVE	4 AMP	2.5 AMP
RESISTIVE	7 AMP	7 AMP
APPROVALS		
KEMA, CE	7A 250V ~ T125 5E4	CE
UL, CSA	7A 250 VAC	UL BRAND L7

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	SPK	21FEB08
CHECK	RJ	21FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	21SX64	6
SCALE	-	WEIGHT: .003 LB MAX	SHEET 1 OF 1