


Data sheet | Item number: 221-415

COMPACT Splicing Connector; for all conductor types; max. 4 mm²; 5-conductor; with levers; transparent housing; Surrounding air temperature: max 85°C (T85); 4,00 mm²; transparent

www.wago.com/221-415

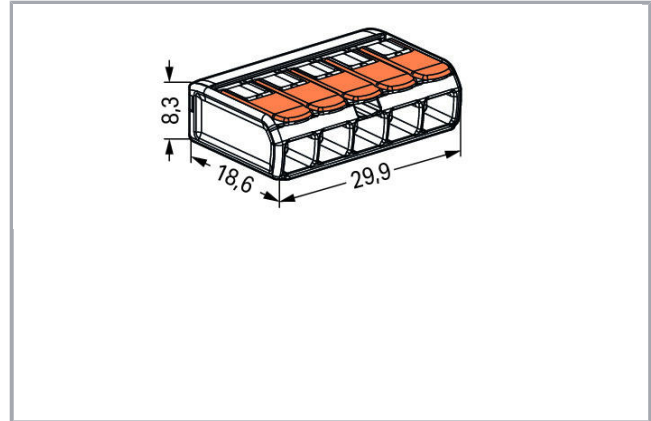

RoHS Compliant [BOMcheck.net](https://www.bomcheck.net)



Item description

Your Benefits:

- Easy to use: Pull the lever up, insert a conductor and push the lever back down
- Available as 2-, 3- and 5-wire connectors
- Easily terminate conductors from 0.14 to 4 mm², as well as solid and stranded conductors from 0.2 to 4 mm² (24 ... 12 AWG).

—
Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



- Time savings for installers and device manufacturers.
- Quickly install devices with higher levels of power consumption.
- Safely install long cable runs with larger conductor cross sections.
- Mounting carrier for installation conforming to standards
- Custom carriers are possible

Safety information 1:

In grounded power lines

Data**Electrical data****Ratings per IEC/EN 60664-1**

| | |
|--------------------------------|--|
| Rated voltage (II / 2) | 450 V |
| Rated impulse voltage (II / 2) | 4 kV |
| Rated current | 32 A |
| Legend (ratings) | (II / 2) \triangleq Overvoltage category II / Pollution degree 2 |

Approvals per UL 1059

| | |
|--------------------------------|-------|
| Rated voltage UL (Use Group C) | 600 V |
| Rated current UL (Use Group C) | 20 A |

Connection data

| | |
|-----------------------------------|--|
| Connection technology | CAGE CLAMP® |
| Actuation type | Lever |
| Connectable conductor materials | Copper |
| Nominal cross section | 4 mm ² |
| Solid conductor | 0.2 ... 4 mm ² / 24 ... 12 AWG |
| Stranded conductor | 0.2 ... 4 mm ² / 24 ... 12 AWG |
| Fine-stranded conductor | 0.14 ... 4 mm ² / 24 ... 12 AWG |
| Strip length | 11 mm / 0.43 inch |
| Total number of connection points | 5 |
| Total number of potentials | 1 |
| Type of wiring | Side-entry wiring |

Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

Geometrical Data

| | |
|--------|----------------------|
| Width | 29.9 mm / 1.177 inch |
| Height | 8.3 mm / 0.327 inch |
| Depth | 18.6 mm / 0.732 inch |

Material Data

| | |
|-----------------------------|-------------|
| Color | transparent |
| Flammability class per UL94 | V2 |
| Weight | 4 g |

Environmental Requirements



| | |
|---|--------|
| Surrounding air (operating) temperature | 85 °C |
| Continuous operating temperature | 105 °C |
| T-Marking per EN 60998 | T85 |

Commercial data

| | |
|--------------------|---------------------|
| Product Group | 7 (Push Wire Conn.) |
| Packaging type | BOX |
| Country of origin | DE |
| GTIN | 4055143234658 |
| Customs Tariff No. | 85369010000 |

Approvals / Certificates



Country specific Approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|--|---------------------------------|--------------------------|------------------|
|  | CCA DEKRA Certification B.V. | EN 60998 | NTR NL- 7642 |
|  | CCA DEKRA Certification B.V. | EN 60998 | 71- 101731 |



Ship Approvals

Certificate

Subject to changes.





| Logo | Approval | Additional Approval Text | name |
|---|---|--------------------------|--------------------------|
|  | ABS American Bureau of Shipping | - | 18- HG1755093- PDA |
|  | DNV GL Det Norske Veritas, Germanischer Lloyd | EN 60998 | TAE000015T |
|  | LR Lloyds Register | EN 60998 | 04/20013 (E8) |

UL-Approvals






| Logo | Approval | Additional Approval Text | Certificate name |
|---|---|--------------------------|------------------|
|  | UL Underwriters Laboratories Inc. | UL 467 | E201573 |
|  | UL Underwriters Laboratories Inc. | UL 486C | E69654 |

Compatible products

Mounting adapter

| | | |
|--|--|--|
|  | Item no.: 221-500 Mounting carrier; 221 Series - 4 mm ² ; for DIN-35 rail mounting/screw mounting; orange | www.wago.com/221-500 |
|  | Item no.: 221-500/000-006 Mounting carrier; 221 Series - 4 mm ² ; for DIN-35 rail mounting/screw mounting; blue | www.wago.com/221-500/000-006 |
|  | Item no.: 221-500/000-053 Mounting carrier; 221 Series - 4 mm ² ; for DIN-35 rail mounting/screw mounting; dark gray-yellow | www.wago.com/221-500/000-053 |
|  | Item no.: 221-505 Mounting carrier; for 5-conductor terminal blocks; 221 Series - 4 mm ² ; for screw mounting; white | www.wago.com/221-505 |

Subject to changes.

| | | |
|--|---|--|
|  | Item no.: 221-505/000-004 Mounting carrier; for 5-conductor terminal blocks; 221 Series - 4 mm ² ; for screw mounting; black | www.wago.com/221-505/000-004 |
|  | Item no.: 221-515 Mounting carrier; for 5-conductor terminal blocks; 221 Series - 4 mm ² ; with snap-in mounting foot for horizontal mounting; white | www.wago.com/221-515 |
|  | Item no.: 221-515/000-004 Mounting carrier; for 5-conductor terminal blocks; 221 Series - 4 mm ² ; with snap-in mounting foot for horizontal mounting; black | www.wago.com/221-515/000-004 |
|  | Item no.: 221-525 Mounting carrier; for 5-conductor terminal blocks; 221 Series - 4 mm ² ; with snap-in mounting foot for vertical mounting; white | www.wago.com/221-525 |
|  | Item no.: 221-525/000-004 Mounting carrier; for 5-conductor terminal blocks; 221 Series - 4 mm ² ; with snap-in mounting foot for vertical mounting; black | www.wago.com/221-525/000-004 |

Downloads Documentation

Bid Text

| | | | |
|-------------------------|--------------|-----------------|----------|
| 221-415 docx - Datei | Jan 23, 2019 | docx 15.7 kB | Download |
| 221-415 X81 - Datei | Feb 19, 2019 | xml 3.5 kB | Download |

Additional Information

| | | | |
|------------------------|-------------|---------------|----------|
| Technical explanations | Apr 3, 2019 | pdf 2.1 MB | Download |
|------------------------|-------------|---------------|----------|

CAD/CAE-Data

CAD data


| | | |
|----------------------|-----|----------|
| 2D/3D Models 221-415 | URL | Download |
|----------------------|-----|----------|

CAE data


| | |
|---------------------------|----------|
| EPLAN Data Portal 221-415 | Download |
|---------------------------|----------|

Subject to changes.


Installation Notes

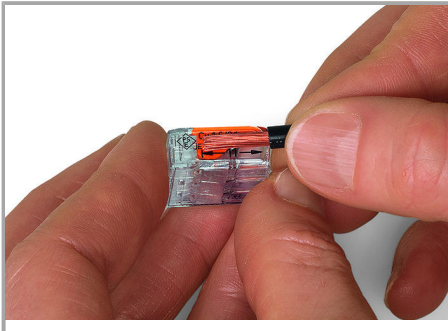


Strip conductor to 11 mm (0.43 inch).

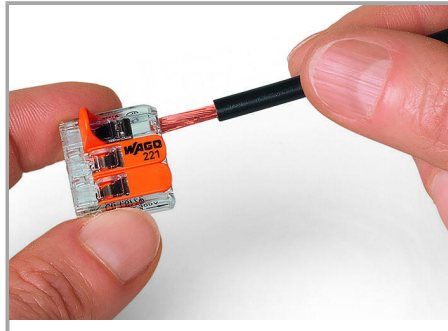


Termination: Lift the lever to open the clamping unit and insert a stripped conductor.

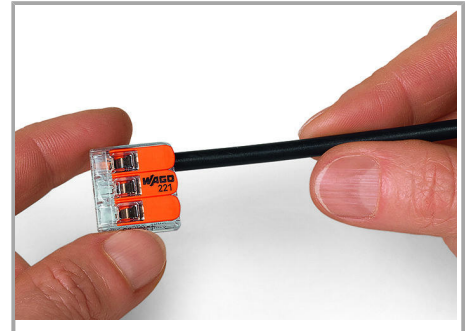

Then, lower the lever to close the clamp.

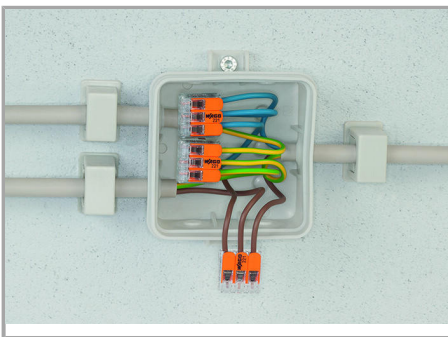

Wiring fine-stranded conductors in a junction box.

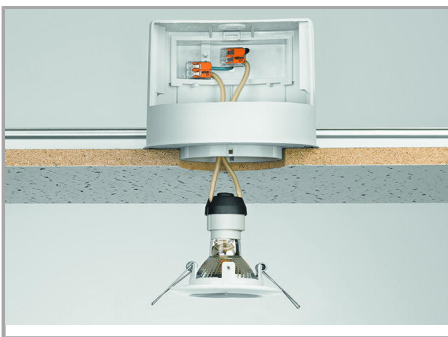

Custom low-voltage lighting system




Lighting distribution in ceiling canopy



Pendant light connection in suspended ceilings

Subject to changes.

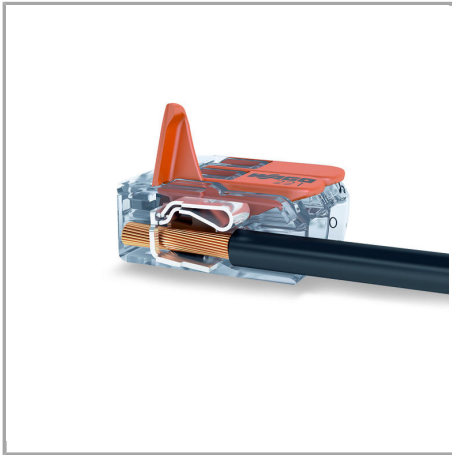

COMPACT Splicing Connectors for All
Conductor Types, 4 mm² (12 AWG), 221
Series

Subject to changes.