

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0022552261](#)  
**Status:** **Active**  
**Overview:** SL™ Modular Connectors  
**Description:** 2.54mm Pitch SL™ Crimp Housing, Dual Row, Version A, Non-polarized, 26 Circuits

**Documents:**

|  |  |
|--|--|
| <a href="#">3D Model</a>                                 | <a href="#">Product Specification TS-70058-001-001 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                            | <a href="#">Product Specification TS-70541-001-001 (PDF)</a> |
| <a href="#">Product Specification PS-70058-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>         |
| <a href="#">Product Specification PS-70400-001 (PDF)</a> |  |

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                |  |
|----------------|--|
| Product Family | Crimp Housings                         |
| Series         | <a href="#">70450</a>                  |
| Application    | Signal, Wire-to-Board                  |
| Comments       | Version A                              |
| Overview       | <a href="#">SL™ Modular Connectors</a> |
| Product Name   | SL™                                    |
| UPC            | 800753626522                           |

**Physical**

|                               |                 |
|-------------------------------|-----------------|
| Breakaway                     | No              |
| Circuits (maximum)            | 26              |
| Color - Resin                 | Black           |
| Flammability                  | 94V-0           |
| Gender                        | Receptacle      |
| Glow-Wire Compliant           | No              |
| Material - Resin              | Polyester       |
| Net Weight                    | 2.210/g         |
| Number of Rows                | 2               |
| Packaging Type                | Bag             |
| Panel Mount                   | No              |
| Pitch - Mating Interface      | 2.54mm          |
| Stackable                     | Yes             |
| Temperature Range - Operating | -40°C to +105°C |

**Solder Process Data**


|                             |     |
|-----------------------------|-----|
| Lead-freeProcess Capability | N/A |
|-----------------------------|-----|

**Material Info**

|                    |            |
|--------------------|------------|
| Engineering Number | 70450-0012 |
|--------------------|------------|

**Reference - Drawing Numbers**

|                       |  |
|-----------------------|--|
| Product Specification | PS-70058-001, PS-70400-001, TS-70058-001-001, TS-70541-001-001 |
| Sales Drawing         | SD-70450-0001-0026   |

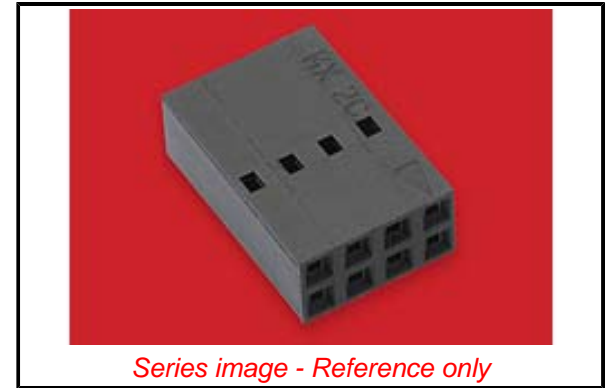

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - ED/30/2017 (7 July 2017)

**Halogen-Free**

**Status**

**Not Low-Halogen**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[70450](#) Series

**Mates With**

2.54mm Pitch C-Grid® Header [70229](#) , [70280](#) , [70246](#) , [70247](#)

**Use With**

[70058](#) , [71851](#)