

Printview: Male connector; with straight solder pins; 4-pole; pin spacing 5.08 mm / 0.2 in; Vertical PCB mounting; with closed end - Item No.: 231-334/001-000

WAGO® online catalog / eShop

Male connector; with straight solder pins; 4-pole; pin spacing 5.08 mm / 0.2 in; Vertical PCB mounting; with closed end

Item No.: 231-334/001-000



Male connector; with straight solder pins; 4-pole; pin spacing 5.08 mm / 0.2 in; Vertical PCB mounting; with closed end

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	231-334/001-000
GTIN / EAN	4044918865296
Content	1
Order amount	200
Customer item number	

Notes

1.2 x 1.2mm solder pins allow nominal current up to 16A, enhancing stability of shorter headers Enclosed on each side, the pin housing design prevents mismatching Coding option available

Technical data

Miscellaneous

No. of Poles	4
Color	orange
Ratings according to 1	IEC/EN 60664-1
Overvoltage category EN 1	III
Pollution degree (1)	2
Rated voltage EN (1) [V]	320 [V]
Rated surge voltage (1) [kV]	4 [kV]

Printview: Male connector; with straight solder pins; 4-pole; pin spacing 5.08 mm / 0.2 in; Vertical PCB mounting; with closed end - Item No.: 231-334/001-000

Technical data	
Nominal current [A]	12 [A]
Overvoltage category EN 2	II
Degree of pollution (2)	2
Rated voltage EN (2) [V]	630 [V]
Bemessungsstossspannung (2) [kV]	4 [kV]
Nominal current (2) [A]	12 [A]
Overvoltage category EN 3	III
Degree of pollution (3)	3
Rated voltage EN (3) [V]	320 [V]
Rated surge voltage (3) [kV]	4 [kV]
Nominal current (3) [A]	12 [A]
Solder pin length [mm]	5 [mm]
Solder pin width A [mm]	1 [mm]
Solder pin width B [mm]	1 [mm]
Drilled hole diameter [mm] [mm]	1.4 [mm]
Tolerance of drilled hole diameter [mm] [mm]	+0.1 [mm]
Material group	I
Insulating material	Polyamide 6.6 (PA 6.6)
Flammability rating per UL 94	V0
Lower limit temperature [C]	-60 [C]
Upper temperature limit [C]	100 [C]
Contact material	Electrolytic copper (Ecu)
Contact plating	tin-plated
Fire load [MJ]	0.026 [MJ]
Weight [g]	1.433 [g]
Width [mm]	23.52 [mm]
Width [in]	0.926 [in]
Height [mm]	12 [mm]
Height [in]	0.472 [in]
Length [mm]	8.4 [mm]
Length [in]	0.331 [in]
Pin spacing from [mm]	5.08 [mm]
Pin spacing up to [mm]	5.08 [mm]
Pin spacing from [in]	0.2 [in]

Printview: Male connector; with straight solder pins; 4-pole; pin spacing 5.08 mm / 0.2 in; Vertical PCB mounting; with closed end - Item No.: 231-334/001-000

Technical data

Pin spacing up to [in]	0.2 [in]
------------------------	----------

Approbation

Item No.	Registration	Registration no.	Voltage [V]	Current [A]	Cross section [mm ² , AWG]
231-334/001-000	ABS	04-HG469925/1-PDA	400	12	0,08-2,5
231-334/001-000	BV	11915/A0	400	16	2,5
231-334/001-000	CCA	5764	250	12	1x1
231-334/001-000	CCA	NL-25579	250	12	
231-334/001-000	CSA	154112-1466354	300	10	
231-334/001-000	GL	17296-00HH	400	12	0,08-2,5
231-334/001-000	KEMA	2083746.02	250	12	1x1
231-334/001-000	KR	HMB05880-EL003	250/400	12/16	2,5
231-334/001-000	LR	96/20035	400	12	0,08-2,5
231-334/001-000	RMR	11130002	400	12	0,08-2,5
231-334/001-000	UL	E45171	600	15	
231-334/001-000	UL	E45172	300	10	

Accessories

Coding

Item no.	Description	Pack. unit (Sub Pack)
231-129	Coding key; snap-on type	100
231-500	Spacer; for formation of groups	100

Printview: Male connector; with straight solder pins; 4-pole; pin spacing 5.08 mm / 0.2 in; Vertical PCB mounting; with closed end - Item No.: 231-334/001-000

Accessories

Counterpart

Item no.	Description	Pack. unit (Sub Pack)
2231-304/008-000	Female connector; with snap-in mounting feet; 4-pole; with integrated push-buttons; pin spacing 5.08 mm / 0.2 in; codable; with 2 latches; Plate thickness 0.6x1.2 mm	100
2231-304/026-000	Female connector; with integrated push-buttons; 4-pole; pin spacing 5.08 mm / 0.2 in; codable; with 2 latches	100
2231-304/031-000	Female connector; with fixing flanges; 4-pole; with integrated push-buttons; pin spacing 5.08 mm / 0.2 in; codable; with 2 latches	50
2231-304/037-000	Female connector; with locking levers; 4-pole; with integrated push-buttons; pin spacing 5.08 mm / 0.2 in; codable; with 2 latches	50
2231-304/102-000	Female connector; with integrated end plate; 4-pole; with integrated push-buttons; pin spacing 5.08 mm / 0.2 in; codable; with 2 latches	100
2231-304/107-000	Female connector; with screw flange; 4-pole; with integrated push-buttons; pin spacing 5.08 mm / 0.2 in; codable; with 2 latches	50
231-2304/026-000	2-conductor female connector; 4-pole; pin spacing 5.08 mm / 0.2 in; codable; with 2 latches	100
231-2304/037-000	2-conductor female connector; with locking levers; 4-pole; pin spacing 5.08 mm / 0.2 in; codable; with 2 latches	50
231-304/008-000	Female connector; with snap-in mounting foot; 4-pole; pin spacing 5.08 mm / 0.2 in; codable; with 2 locking latches; Plate thickness 0.6x1.2 mm; Fixing holes 3.5 mm Ø	100
231-304/026-000	Female connector; 4-pole; pin spacing 5.08 mm / 0.2 in; codable; with latch; with coding finger	100
231-304/031-000	Female connector; with fixing flanges; 4-pole; pin spacing 5.08 mm / 0.2 in; codable; with latch; for panel mounting; for screw or similar mounting types	50
231-304/037-000	Female connector; with locking levers; 4-pole; pin spacing 5.08 mm / 0.2 in; with coding finger; with latch	50
231-304/102-000	Female connector; with integrated end plate; 4-pole; pin spacing 5.08 mm / 0.2 in; with latch; with coding finger	100
231-304/107-000	Female connector; with screw flange; 4-pole; pin spacing 5.08 mm / 0.2 in; codable; with 2 locking latches	50
232-164	Female connector; with straight solder pins; 4-pole; pin spacing 5.08 mm / 0.2 in; solder pin 0.6x1 mm; codable; Vertical PCB mounting; with 2 locking latches	100
232-164/031-000	Female connector; with straight solder pins; 4-pole; with feedthrough flanges; pin spacing 5.08 mm / 0.2 in; solder pin 0.6x1 mm; codable; Vertical PCB mounting	50
232-164/039-000	Female connector; with straight solder pins; 4-pole; with locking levers; pin spacing 5.08 mm / 0.2 in; solder pin 0.6x1 mm; codable; Vertical PCB mounting	50

Printview: Male connector; with straight solder pins; 4-pole; pin spacing 5.08 mm / 0.2 in; Vertical PCB mounting; with closed end - Item No.: 231-334/001-000

Accessories



232-164/047-000	Female connector; with straight solder pins; 4-pole; with spacers; pin spacing 5.08 mm / 0.2 in; solder pin 0.6x1 mm; codable; Vertical PCB mounting	50
232-264	Female connector; with angled solder pins; 4-pole; pin spacing 5.08 mm / 0.2 in; solder pin 0.6x1 mm; codable; Horizontal PCB mounting; with 2 locking latches	100
232-264/031-000	Female connector; with angled solder pins; 4-pole; with feedthrough flanges; pin spacing 5.08 mm / 0.2 in; solder pin 0.6x1 mm; codable; Horizontal PCB mounting	50
232-264/039-000	Female connector; with angled solder pins; 4-pole; with locking levers; pin spacing 5.08 mm / 0.2 in; solder pin 0.6x1 mm; codable; Horizontal PCB mounting	50
232-264/047-000	Female connector; with angled solder pins; 4-pole; with spacers; pin spacing 5.08 mm / 0.2 in; solder pin 0.6x1 mm; codable; Horizontal PCB mounting	50
232-304/026-000	Angled female connector; 4-pole; pin spacing 5.08 mm / 0.2 in; codable; with 2 locking latches; Conductor exit opposite to latches	100
232-404/026-000	Angled female connector; 4-pole; pin spacing 5.08 mm / 0.2 in; codable; with 2 locking latches; conductor exit same direction as latches	100

General accessory

Item no.	Description	Pack. unit (Sub Pack)
210-657	Operating tool with partially insulated shaft; blade (3.5 x 0.5) mm; short; suitable for 260, 261, 262, 264, 270, 280, 281, 869, 870 and 880 Series	1
210-658	Operating tool with partially insulated shaft; blade (3.5 x 0.5) mm; short; angled; particularly suitable for 280 Series actuator and sensor terminal blocks and also for Series 260, 261, 262, 264, 280, 281, 869, 870, 880, 2002,	1
210-720	Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm; suitable for 260, 261, 262, 264, 270, 280, 281, 290, 775, 776, 777, 769, 780, 781, 869, 870, 880, 2002, 2003, 2004, 2005 and 2022 Series	1

Printview: Male connector; with straight solder pins; 4-pole; pin spacing 5.08 mm / 0.2 in; Vertical PCB mounting; with closed end - Item No.: 231-334/001-000

Images & drawings

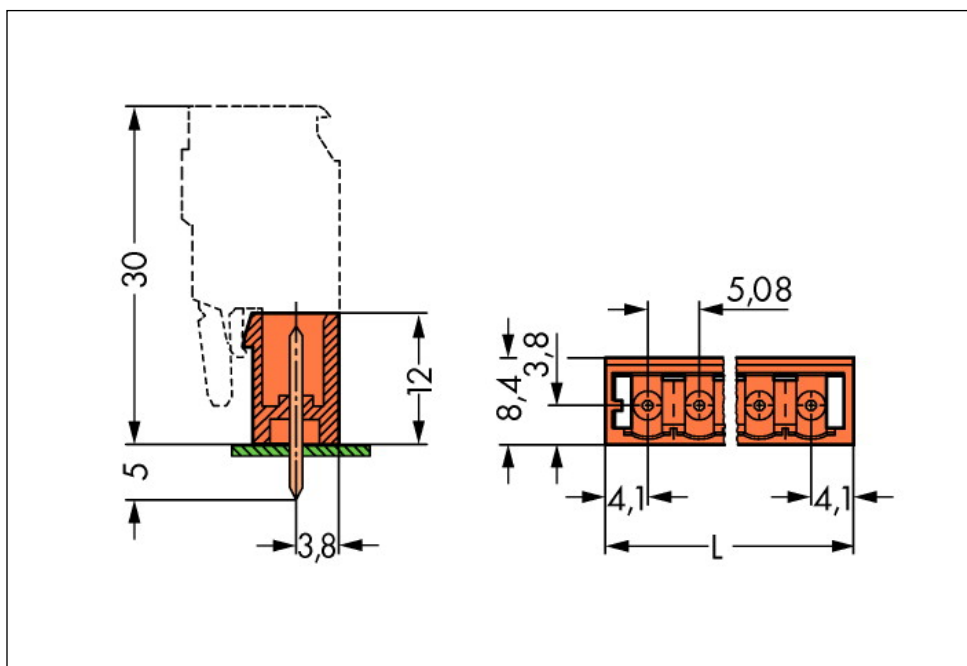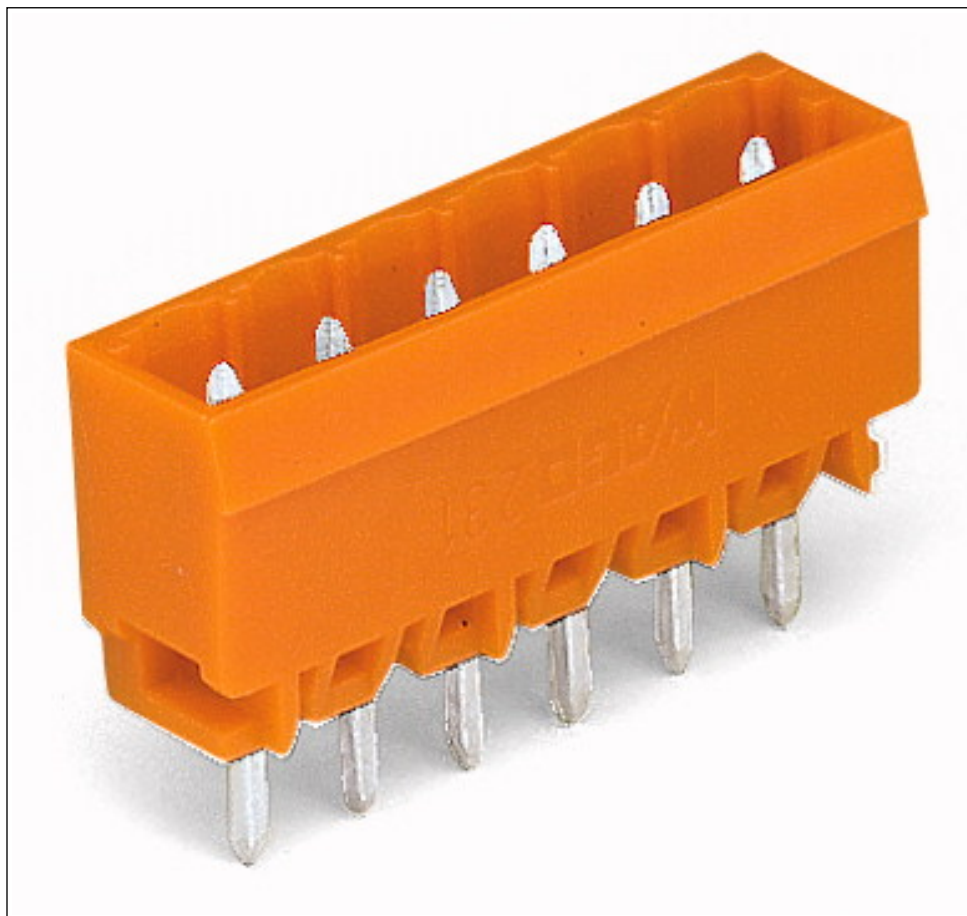

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.