


Item no.: 232-234/031-000  
 Product description: FEMALE PLUG; WITH RIGHT ANGLED SOLDER PIN; 4 POLE; WITH FIXING FLANGES FOR FEEDTHROUGHAPPLICATIONS; PIN SPACING 5 MM / 0.197 IN; SOLDER PIN 0.6x1 MM



Packing unit 50 pieces

Product group	3 (Multi Conn. System)
Pin spacing from	5 mm
Pin spacing from	0,197 in
pole count	4
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	12 A
Weight	4,114 g
Color	grey
Height	11,6 mm
Height	0,457 in
Width	34,8 mm
Width	1,37 in
Depth	18,25 mm
Depth	0,719 in

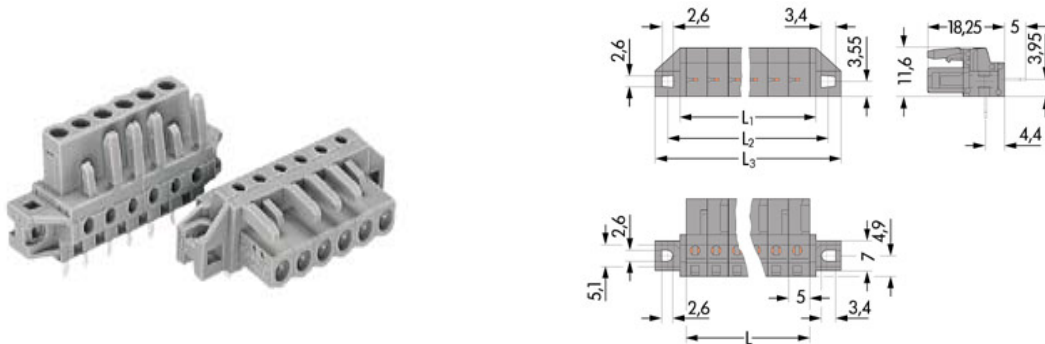

Item number	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [ mm <sup>2</sup> ]
232-234/031-000	ABS	04-HG469925-PDA	250	12	0,8-2,5
232-234/031-000	GL	17296-00HH	250	12	0,8-2,5
232-234/031-000	LR	96/20035	250	12	0,8-2,5
232-234/031-000	RMR	11130002	250	12	0,8-2,5

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected