Ultra Slim RedMere HDMI to HDMI   multicomp PRO
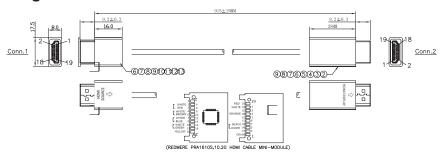
Specifications

Connector Type A	: HDMI Type A Plug
Connector Type B	: HDMI Type A Plug
Contact Resistance	: 2Ω
Insulation Resistance	: 10MΩ
Hi-Pot Test	: DC 300V/10ms
Cable Length	: 914mm (3ft)
Jacket Colour	: Black

Diagram

(REDMERE PRA1610S,10.2G HDMI CABLE MINI-MODULE)

No.	Description	Qty.	Unit
1	UL20276 [36AWG (7/0.05TC)×1P+EAM]×5C+7/0.05TC×4C+AB (16/9/0.06TC 85%TC) OD:3.6mm Black Marking: High Speed HDMIR cable with Ethernet	0.925	m
2	Red mere 102Gbps PCB+SMT (HDMI Pin Gold Flash, Shell Gold Flash)	1	set
3	Red mere PCB Wire Frame Black 36AWG 1.4V	1	Pcs
4	Red mere ABS One-Piece Shell, Colour: Black		
5	Red mere ABS One-Piece Before Head, Colour: Black		
6	Transparent PE Internal Model Materials	8	g
7	45P PVC, Colour: Black	-	-
8	HDMI M Transparent Dust Cover	2	Pcs
9	Black heat-shrinkable tubing thin-wall 1.5mm×18mm	0.036	m
10	HDMI AM 36AWG 1.4V Wire Frame	1	pcs
11	HDMI AM, Short, Automatic Welding Insulation: Black, Pin Gold Plated, Shell Gold Plated		
12	HDMI AM, Short (17.4×16×8mm) ABS One-Piece Shell, Colour: Black SR OD: 5.9mm		
13	HDMI AM, Short ABS One-Piece Before Head, Colour: Black		

Dimensions : Millimetres

Part Number Table

Description	Part Number
Ultra Slim RedMere HDMI to HDMI, 3ft	24-15285

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO