

# PC board connectors, rising cage clamp system

Spacing: 5.00/5.08 mm

# wiecon PCB


Rated cross section:  
1.5 mm<sup>2</sup>

Rated current:  
10 A



Connection range:  
0.14 – 2.5 mm<sup>2</sup> solid/  
0.14 – 1.5 mm<sup>2</sup> fine stranded

250 V/4 kV/3 – Overvoltage category III  
\*690 V/4 kV/2 – Overvoltage category II  
1000 V/4 kV/1 – Overvoltage category I

without insulating plate

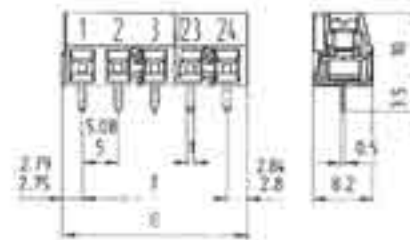

with insulating plate

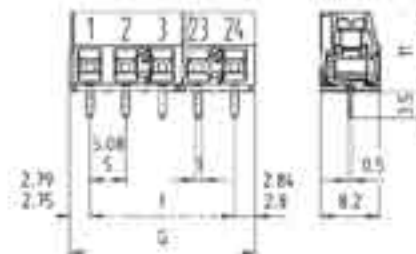

Solder pin 0.5 x 1 mm  
Bore hole Ø 1.2 mm

Material:  
Insulating housing:  
PA 66/6 gray, UL 94-V0  
Clamping body: nickel-plated brass  
Contact clip with solder pin:  
tin-plated bronze  
Clamping screw: zinc-plated steel  
Brass Nickel-plated  
available upon request

## Type 8192/8292

wire horizontal to PC board

No. 30 – 14 AWG

300 V 15/16 A

No. 30 – 14 AWG

300 V 15 A



\* max. 800 V for ungrounded networks or expected overvoltage ± 4 kV

Rated voltages VDE 0110

UL ratings

CSA ratings

Approvals

Std pack	G	T	Poles	Part no.	Part no.	Part no.	Part no.
<b>Spacing: 5.00 mm</b>				unmarked without insulating plate	marked without insulating plate	unmarked with insulating plate with fixing bolts	marked with insulating plate with fixing bolts
100	10.55	5	2	25.191.0253.0	25.190.0253.0	25.191.9253.0	25.190.9253.0
100	15.55	10	3	25.191.0353.0	25.190.0353.0	25.191.9353.0	25.190.9353.0
50	20.55	15	4	25.191.0453.0	25.190.0453.0		
50	25.55	20	5	25.191.0553.0	25.190.0553.0		
50	30.55	25	6	25.191.0653.0	25.190.0653.0		
50	35.55	30	7	25.191.0753.0	25.190.0753.0		
50	40.55	35	8	25.191.0853.0	25.190.0853.0		
50	45.55	40	9	25.191.0953.0	25.190.0953.0		
50	50.55	45	10	25.191.1053.0	25.190.1053.0		
50	55.55	50	11	25.191.1153.0	25.190.1153.0		
50	60.55	55	12	25.191.1253.0	25.190.1253.0		
50	65.55	60	13	25.191.1353.0	25.190.1353.0		
50	70.55	65	14	25.191.1453.0	25.190.1453.0		
50	75.55	70	15	25.191.1553.0	25.190.1553.0		
50	80.55	75	16	25.191.1653.0	25.190.1653.0		
17 to 24pole upon request							
<b>Spacing: 5.08 mm</b>				unmarked without insulating plate	marked without insulating plate	unmarked with insulating plate with fixing bolts	marked with insulating plate with fixing bolts
100	10.71	5.08	2	25.193.0253.0	25.192.0253.0	25.193.9253.0	25.192.9253.0
100	15.79	10.16	3	25.193.0353.0	25.192.0353.0	25.193.9353.0	25.192.9353.0
50	20.87	15.24	4	25.193.0453.0	25.192.0453.0		
50	25.95	20.32	5	25.193.0553.0	25.192.0553.0		
50	31.03	25.40	6	25.193.0653.0	25.192.0653.0		
50	36.11	30.48	7	25.193.0753.0	25.192.0753.0		
50	41.19	35.56	8	25.193.0853.0	25.192.0853.0		
50	46.27	40.64	9	25.193.0953.0	25.192.0953.0		
50	51.35	45.72	10	25.193.1053.0	25.192.1053.0		
50	56.43	50.80	11	25.193.1153.0	25.192.1153.0		
50	61.51	55.88	12	25.193.1253.0	25.192.1253.0		
50	66.59	60.96	13	25.193.1353.0	25.192.1353.0		
50	71.67	66.04	14	25.193.1453.0	25.192.1453.0		
50	76.75	71.12	15	25.193.1553.0	25.192.1553.0		
50	81.83	76.20	16	25.193.1653.0	25.192.1653.0		
17 to 24pole upon request							