




# GUARDIAN Electric Manufacturing

ISO 9001 / AS9100 Certified Company

Woodstock, IL 60098 Ph. (815)334-3600 Fax (815)337-0377

Or visit us at our website [www.guardian-electric.com](http://www.guardian-electric.com)

## Model 26 DC Frame Solenoid

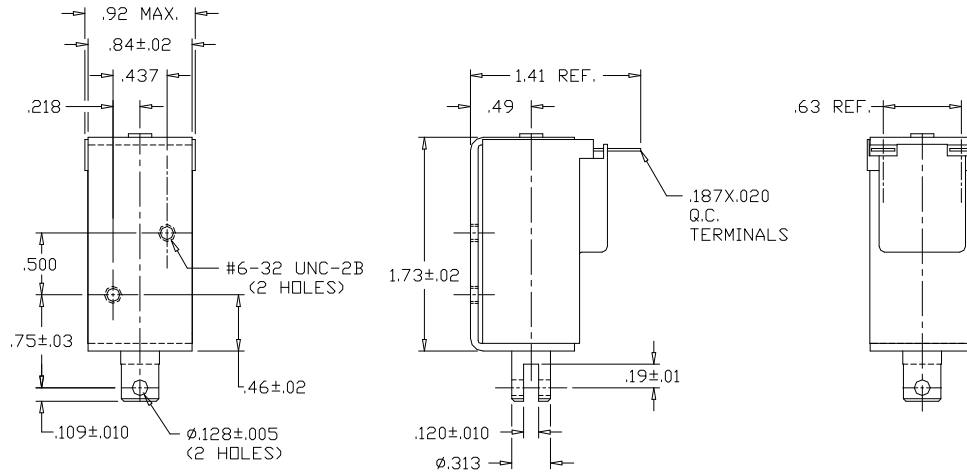

Solenoid shown energized and fully seated.

Total Weight: 3.2 oz.

Plunger Weight: .5 oz.


Model No.	Part No.	Duty Cycle	Voltage	Resistance (Ω)	Power (W)	Current
26-I-12D	A420-065543-00	Intermittent	12VDC	10.7	14.1	1.1 A
26-C-12D	A420-065542-00	Continuous	12VDC	26.7	5.7	449 mA
26-I-24D	A420-065545-00	Intermittent	24VDC	41.5	14.6	578 mA
26-C-24D	A420-065544-00	Continuous	24VDC	104	5.8	231 mA

When ordering, please refer to Part No., as listed above.

Consult factory for custom configurations.

Stroke (in.)	Pull Force (oz.)								Holding Force (oz.)
	0.050	0.125	0.250	0.375	0.500	0.625	0.750	1.000	
Continuous Duty	25	12	5	3	2	1	n/a	n/a	58
Intermittent Duty	30	24	16	13	12	6	3	2	75

### UL Recognition

Recognized under the  Component Recognition Program of **Underwriters Laboratories, Inc.**

### Continuous Duty

100% 'On' Time

### Intermittent Duty

25% 'On' Time, (100 Seconds 'On' Max. Followed By 300 Seconds 'Off' Min.)

### RoHS

These parts comply with **RoHS** Directive 2002/95/EC