









Fused Disconnect Terminal Blocks for Miniature Metric Fuses 5 x 20 mm, 5 x 25 mm, 5 x 30 mm









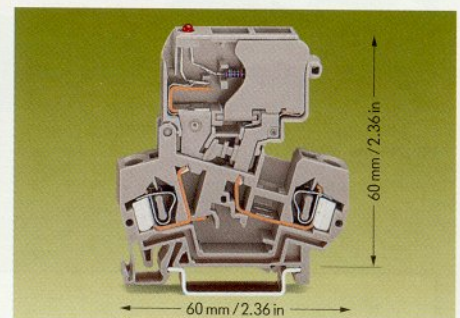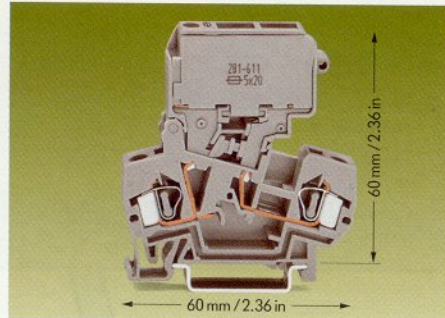





Front-entry



0.08 – 4 mm² | AWG 28 – 12
 800 V/8 kV/3 ① ② | 600 V, 10 A ② 
 10 A "T"/6.3 A "FF" – "T" ②
 Terminal block width 8 mm / 0.315 in
 9 – 10 mm / 0.37 in
 * 

0.08 – 4 mm² | AWG 28 – 12
 800 V/8 kV/3 ① ② | 30/65 V, 10 A ② 
 10 A "T"/6.3 A "FF" – "T" ②
 Terminal block width 8 mm / 0.315 in
 9 – 10 mm / 0.37 in
 * 

- ① 800 V = rated voltage
 8 kV = rated surge voltage
 3 = pollution degree
 (see also section 10)
- ② Nominal voltage and current are given by the LED or fuse
 FF = Fast acting fuse
 T = Slow acting fuse
- ③ Leakage current in case of blown fuse:
 LED 6 mA, neon lamp < 0.4 mA



Description	Item-No.	Pack.-unit pcs	Item-No.	Pack.-unit pcs		
Fused disconnect terminal block, with pivotable fuse holder, for DIN 35 rail, for miniature metric fuses	without blown fuse indication		with blown fuse indication by LED			
5 x 20 mm	grey	281-611	50	grey 15 – 30 V ≈  281-611/281-541	50	
5 x 20 mm	orange	281-616	50	grey 30 – 65 V ≈  281-611/281-542	50	
5 x 25 mm	grey	281-612	50	grey 15 – 30 V ≈  281-612/281-541	50	
5 x 25 mm				grey 30 – 65 V ≈  281-612/281-542	50	
5 x 30 mm	grey	281-622	50	grey 15 – 30 V ≈  281-622/281-541	50	
5 x 30 mm				grey 30 – 65 V ≈  281-622/281-542	50	
Accessories (see also section 8)	Appropriate marking system WSB		Appropriate marking system WSB			
 End and intermediate plate	2.5 mm / 0.098 in thick		2.5 mm / 0.098 in thick			
	orange	281-309	100 (4 x 25)	orange	281-309	100 (4 x 25)
	grey	281-311	100 (4 x 25)	grey	281-311	100 (4 x 25)
 Adjacent jumper, insulated	I _N 32 A			I _N 32 A		
	grey	281-402	200 (8 x 25)	grey	281-402	200 (8 x 25)
 Test plug adapter, suitable for terminal blocks 1.5 mm² – 4 mm²/AWG 16 – 12	5 mm / 0.197 in wide		5 mm / 0.197 in wide			
		280-404	100 (4 x 25)		280-404	100 (4 x 25)
 Test plug, 6 mm / 0.236 in wide, with CAGE CLAMP® for 0.08 mm² – 2.5 mm²/AWG 28-14	for test plug 210-137 (2.3 mm / 0.091 in Ø)		for test plug 210-137 (2.3 mm / 0.091 in Ø)			
	I _N 24 A	281-407	100 (4 x 25)	I _N 24 A	281-407	100 (4 x 25)
 Connecting strip, for ganging several fuse holders, length 1 m / 3'3"	transparent	210-254	1	transparent	210-254	1
 Miniature metric fuse		contact factory			contact factory	
Dimensions (in mm)						

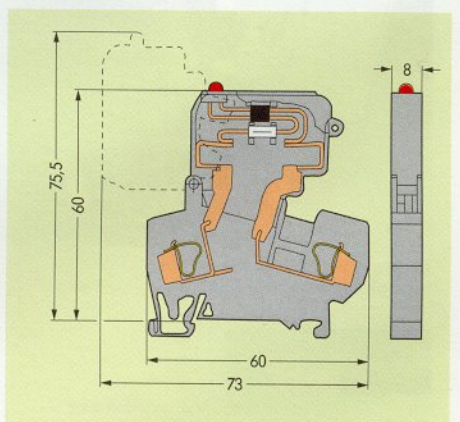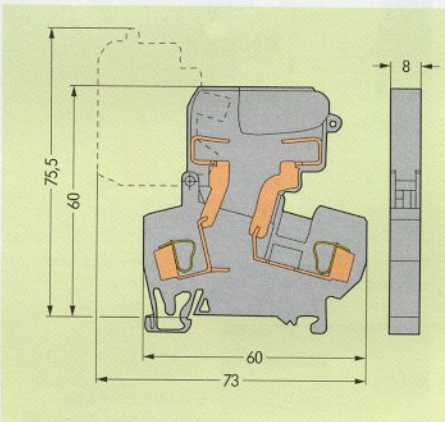

* For further approvals with corresponding ratings see pages 10.3 ff.