

Data sheet | Item number: 281-418

Test plug module; modular; suitable for all WAGO 281, 776, 777 and 781 series rail-mounted terminal blocks with jumper slots in the current bar; gray

www.wago.com/281-418



Item description

Safety information 1:

These test plugs are not suitable for Ex e applications.

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Data

Electrical data

Test voltage	400 V
Test current	6 A

Physical data

Width	6 mm / 0.236 inch
Module width	6 mm / 0.236 inch

Material data

Color	gray
Fire load	0.023 MJ
Weight	1.9 g

Commercial data

Product Group	1 (Rail Mounted Terminal Blocks)
Packaging type	BOX
Country of origin	DE
GTIN	4044918276320
Customs tariff number	85366990990

Compatible products

check

	Item no.: 210-136 Test plug; 2 mm Ø; with 500 mm cable; red	www.wago.com/210-136
	Item no.: 210-137 Test plug; 2.3 mm Ø; with 500 mm cable; yellow	www.wago.com/210-137

Downloads

Documentation

Bid Text

281-418 doc - Datei	2017 Apr 28	doc 24.1 kB	Download
281-418	2019 Feb 19	xml 3.0 kB	Download

Subject to changes. Please also observe the further product documentation!

X81 - Datei

Additional Information

Technical explanations

2019 Apr 3

pdf
2.2 MB

[Download](#)

CAD/CAE-Data

CAE data

WSCAD Universe 281-418

[URL](#)

[Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 281-418


[URL](#)

[Download](#)

Test plug module; modular; suitable for all WAGO 281, 776, 777 and 781 series rail-mounted terminal blocks with jumper slots in the current bar; gray

Installation Notes


Installation

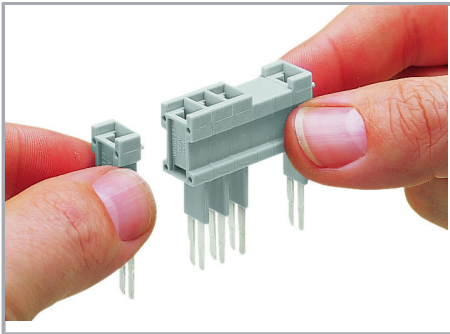

Snapping test plug and spacer modules together to assemble a multipole test plug module.

Testing

Subject to changes. Please also observe the further product documentation!

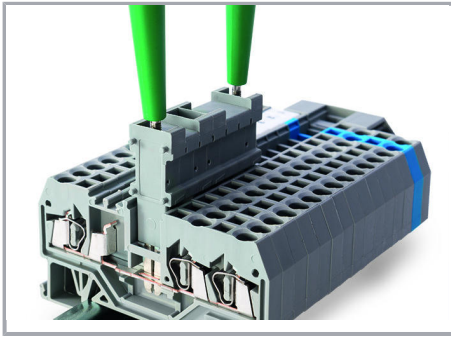

Test plugs modules are directly plugged into the jumper contact slot of the current bar.

Subject to changes. Please also observe the further product documentation!