



	5		4		3		2		1
PART NUMBER	ITEM ① BODY	ITEM ② CONTACT	ITEM ③ INSULATOR	ITEM ④ COUPLING NUT	ITEM ⑤ INSULATOR				
28-90507	ZINC NICKEL PLATED	BRASS GOLD PLATED	P.P.	ZINC NICKEL PLATED	TPX				

DRAWING NO. 28-90507			
REVISIONS			
01	OFFICIAL RELEASE	2009.09.01	
08-18-09	L	L	H
			Betty
			08:09:39:04
			+08:00

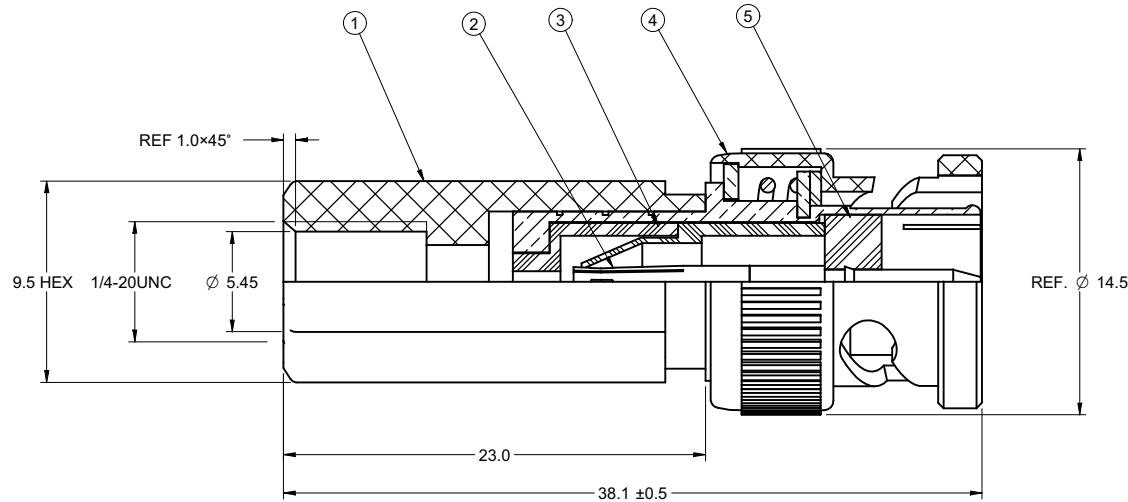

受控 CONTROLLED DOCUMENT					
编号 P/N	28-90507	版本 Rev	01	日期 Rel'd Date	SEP 14,09

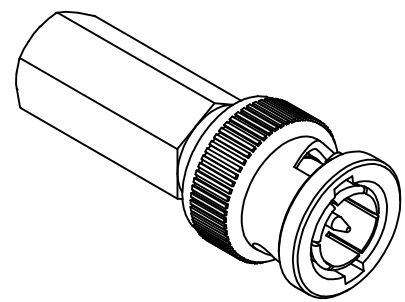

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

NOTES:

1. IMPEDANCE: 75 OHMS NOMINAL
2. FREQUENCY RANGE: 0-2 GHz
3. CABLE ACCEPTABILITY:RG 59, RG62
4. CABLE RETENTION: 20lbs MIN
5. RECOMMENDED TEMPERATURE RANGE: -55 °C TO +85°C
6. FURTHER TECHNICAL DETAIL: REFER TO EMERSON DOCUMENT P/N 27-0000

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY LINDA.WU	DATE 08-18-09
DECIMALS	mm	CHECKED BY LINDA.WU	DATE 08-18-09
X	+ 0.5	APPROVED BY THOMAS	DATE 08-18-09
X.X	+ 0.2		
X.XX	+ 0.1		
ANGLES	+ 0.5°	U/M mm	☉

EMERSON Network Power		Connectivity Solutions	
TITLE CPFIUG782 75 BNC (M) 1 PC TW RG59			
SHEET 1 OF 1	DRAWING NO. 28-90507	SIZE C	

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.