

# Power supply unit - TRIO-PS-2G/1AC/12DC/5/C2LPS - 2903157

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Primary-switched TRIO POWER power supply with push-in connection for DIN rail mounting, input: 1-phase, output: 12 V DC/5 A C2LPS

## Product Description

TRIO POWER power supplies with standard functionality


The TRIO POWER power supply range with push-in connection has been perfected for use in machine building. All functions and the space-saving design of the single and three-phase modules are optimally tailored to the stringent requirements. Under challenging ambient conditions, the power supply units, which feature an extremely robust electrical and mechanical design, ensure the reliable supply of all loads.

## Your advantages

- ✓ Save time and costs, thanks to the Push-in connection and narrow design
- ✓ Increase system availability, thanks to dynamic boost with 150% of the nominal current for five seconds
- ✓ Maximum flexibility due to the wide temperature range from -25°C to +70°C and device startup at -40°C
- ✓ Electrically robust, thanks to high electric strength
- ✓ Mechanically robust, thanks to high vibration and shock resistance



## Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 pc                                                                                                    |
| GTIN                                 | <br>4 055626 248486 |
| GTIN                                 | 4055626248486                                                                                           |
| Weight per Piece (excluding packing) | 500.000 g                                                                                               |
| Custom tariff number                 | 85044030                                                                                                |
| Country of origin                    | China                                                                                                   |

## Technical data

### Dimensions

|       |       |
|-------|-------|
| Width | 30 mm |
|-------|-------|

# Power supply unit - TRIO-PS-2G/1AC/12DC/5/C2LPS - 2903157

## Technical data

### Dimensions

|                                  |               |
|----------------------------------|---------------|
| Height                           | 130 mm        |
| Depth                            | 115 mm        |
| Installation distance right/left | 0 mm / 0 mm   |
| Installation distance top/bottom | 50 mm / 50 mm |

### Ambient conditions

|                                                                     |                                              |
|---------------------------------------------------------------------|----------------------------------------------|
| Degree of protection                                                | IP20                                         |
| Inflammability class in acc. with UL 94 (housing / terminal blocks) | V0                                           |
| Ambient temperature (operation)                                     | -25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K) |
| Ambient temperature (start-up type tested)                          | -25 °C                                       |
| Ambient temperature (storage/transport)                             | -40 °C ... 85 °C                             |
| Max. permissible relative humidity (operation)                      | ≤ 95 % (at 25 °C, non-condensing)            |
| Climatic class                                                      | 3K3 (in acc. with EN 60721)                  |
| Degree of pollution                                                 | 2                                            |
| Installation height                                                 | ≤ 5000 m (> 2000 m, Derating: 10 %/1000 m)   |

### Input data

|                                          |                                           |
|------------------------------------------|-------------------------------------------|
| Nominal input voltage range              | 100 V AC ... 240 V AC                     |
|                                          | 110 V DC ... 250 V DC                     |
| Input voltage range                      | 100 V AC ... 240 V AC -15 % ... +10 %     |
|                                          | 99 V DC ... 275 V DC                      |
| Dielectric strength maximum              | ≤ 300 V AC 15 s                           |
| AC frequency range                       | 50 Hz ... 60 Hz ±10 %                     |
| Discharge current to PE                  | < 0.25 mA                                 |
| Current consumption                      | 1.1 A (100 V AC)                          |
|                                          | 1 A (120 V AC)                            |
|                                          | 0.6 A (230 V AC)                          |
|                                          | 0.6 A (240 V AC)                          |
| Nominal power consumption                | 137.3 VA                                  |
| Inrush current                           | ≤ 25 A (typical)                          |
| Mains buffering time                     | typ. 20 ms (120 V AC)                     |
|                                          | typ. 110 ms (230 V AC)                    |
| Input fuse                               | 6.3 A Slow-blow                           |
| Recommended breaker for input protection | 6 A ... 16 A (Characteristics B, C, D, K) |
| Power factor (cos phi)                   | 0.51                                      |
| Type of protection                       | Transient surge protection                |
| Protective circuit/component             | Varistor                                  |

### Output data

# Power supply unit - TRIO-PS-2G/1AC/12DC/5/C2LPS - 2903157

## Technical data

### Output data

|                                                          |                                                               |
|----------------------------------------------------------|---------------------------------------------------------------|
| Nominal output voltage                                   | 12 V DC $\pm 1\%$                                             |
| Setting range of the output voltage ( $U_{\text{set}}$ ) | 12 V DC ... 18 V DC (> 12 V DC, constant capacity restricted) |
| Nominal output current ( $I_N$ )                         | 5 A                                                           |
| Derating                                                 | > 60 °C ... 70 °C (2.5%/K)                                    |
| Connection in parallel                                   | yes, for redundancy and increased capacity                    |
| Connection in series                                     | yes                                                           |
| Feedback voltage resistance                              | < 25 V                                                        |
| Protection against overvoltage at the output (OVP)       | $\leq 22$ V DC                                                |
| Control deviation                                        | < 1 % (change in load, static 10 % ... 90 %)                  |
|                                                          | < 3 % (Dynamic load change 10 % ... 90 %, 10 Hz)              |
|                                                          | < 0.1 % (change in input voltage $\pm 10\%$ )                 |
| Residual ripple                                          | < 50 mV <sub>PP</sub> (with nominal values)                   |
| Output power                                             | 60 W                                                          |
| Typical response time                                    | < 1 s                                                         |
| Maximum no-load power dissipation                        | < 1 W (230 V)                                                 |
| Power loss nominal load max.                             | < 10 W (230 V)                                                |

### General

|                                                                     |                                                                                      |
|---------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Net weight                                                          | 0.32 kg                                                                              |
| Efficiency                                                          | > 86 % (for 230 V AC and nominal values)                                             |
| MTBF (IEC 61709, SN 29500)                                          | 25 °C                                                                                |
|                                                                     | > 2900000 h (40 °C)                                                                  |
|                                                                     | 60 °C                                                                                |
| Insulation voltage input/output                                     | 3 kV AC (type test)                                                                  |
|                                                                     | 1.5 kV AC (routine test)                                                             |
| Degree of protection                                                | IP20                                                                                 |
| Protection class                                                    | II (in closed control cabinet)                                                       |
| Inflammability class in acc. with UL 94 (housing / terminal blocks) | V0                                                                                   |
| Housing material                                                    | PC                                                                                   |
| Mounting position                                                   | horizontal DIN rail NS 35, EN 60715                                                  |
| Assembly instructions                                               | alignable: horizontally 0 mm ( $\leq 40$ °C) 10 mm ( $\leq 70$ °C), vertically 50 mm |

### Connection data, input

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Push-in connection  |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 4 mm <sup>2</sup>   |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |

## Power supply unit - TRIO-PS-2G/1AC/12DC/5/C2LPS - 2903157

### Technical data

#### Connection data, input

|                                  |       |
|----------------------------------|-------|
| Conductor cross section AWG min. | 24    |
| Conductor cross section AWG max. | 12    |
| Stripping length                 | 10 mm |

#### Connection data, output

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Push-in connection  |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 4 mm <sup>2</sup>   |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 12                  |
| Stripping length                      | 8 mm                |

#### Connection data for signaling

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Push-in connection  |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 1.5 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 1.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 16                  |
| Stripping length                      | 8 mm                |

#### Standards

|                                                                                                                                  |                                                            |
|----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| EMC requirements for noise immunity                                                                                              | EN 61000-6-1                                               |
|                                                                                                                                  | EN 61000-6-2                                               |
| EMC requirements for noise emission                                                                                              | EN 61000-6-3                                               |
|                                                                                                                                  | EN 61000-6-4                                               |
| Standard - Safety of transformers                                                                                                | EN 61558-2-16 (air clearances and creepage distances only) |
| Standard - Electrical safety                                                                                                     | IEC 62368-1 (SELV)                                         |
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV)                                   |
| Standard – Safety extra-low voltage                                                                                              | IEC 62368-1 (SELV) und EN 60204-1 (PELV)                   |
| Standard - Safe isolation                                                                                                        | DIN VDE 0100-410                                           |
| Standard – Limitation of mains harmonic currents                                                                                 | EN 61000-3-2                                               |
| Rail applications                                                                                                                | EN 50121-4                                                 |
| Overvoltage category EN 60950-1                                                                                                  | II                                                         |

#### Conformance/approvals

# Power supply unit - TRIO-PS-2G/1AC/12DC/5/C2LPS - 2903157

## Technical data

### Conformance/approvals

|              |                               |
|--------------|-------------------------------|
| UL approvals | UL Listed UL 508              |
|              | UL/C-UL Recognized UL 60950-1 |
|              | NEC Class 2 as per UL 1310    |

### EMC data

|                               |                                                        |
|-------------------------------|--------------------------------------------------------|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU              |
| Low Voltage Directive         | Conformance with Low Voltage Directive 2014/35/EC      |
| Electrostatic discharge       | EN 61000-4-2                                           |
| Contact discharge             | 6 kV (Test Level 3)                                    |
| Discharge in air              | 8 kV (Test Level 3)                                    |
| Electromagnetic HF field      | EN 61000-4-3                                           |
| Frequency range               | 80 MHz ... 3 GHz                                       |
| Test field strength           | 10 V/m (Test Level 3)                                  |
| Frequency range               | 80 MHz ... 3 GHz                                       |
| Test field strength           | 10 V/m (Test Level 3)                                  |
| Frequency range               | 80 MHz ... 3 GHz                                       |
| Test field strength           | 10 V/m (Test Level 3)                                  |
| Comments                      | Criterion A                                            |
| Fast transients (burst)       | EN 61000-4-4                                           |
| Input                         | 4 kV (Test Level 3 - asymmetrical)                     |
| Output                        | 2 kV (Test Level 3 - asymmetrical)                     |
| Signal                        | 2 kV (Test Level 3 - asymmetrical)                     |
| Comments                      | Criterion A                                            |
| Surge voltage load (surge)    | EN 61000-4-5                                           |
| Input                         | 3 kV (Test Level 4 - symmetrical)                      |
|                               | 6 kV (Test Level 4 - asymmetrical)                     |
| Output                        | 1 kV (Test Level 3 - symmetrical)                      |
|                               | 2 kV (Test Level 3 - asymmetrical)                     |
| Signal                        | 1 kV (Test Level 2 - asymmetrical)                     |
| Comments                      | Criterion A                                            |
| Conducted interference        | EN 61000-4-6                                           |
| Frequency range               | 0.15 MHz ... 80 MHz                                    |
| Voltage                       | 10 V (Test Level 3)                                    |
| Comments                      | Criterion A                                            |
| Voltage dips                  | EN 61000-4-11                                          |
| Voltage                       | 230 V AC                                               |
| Frequency                     | 50 Hz                                                  |
| Criterion A                   | Normal operating behavior within the specified limits. |

# Power supply unit - TRIO-PS-2G/1AC/12DC/5/C2LPS - 2903157

## Technical data

### EMC data


|             |                                                                                      |
|-------------|--------------------------------------------------------------------------------------|
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself. |
|-------------|--------------------------------------------------------------------------------------|

### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 25;                                                           |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings

Block diagram

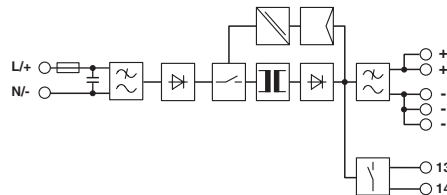

## Classifications

### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27040701 |
| eCl@ss 11.0   | 27040701 |
| eCl@ss 4.0    | 27040702 |
| eCl@ss 4.1    | 27040702 |
| eCl@ss 5.0    | 27049002 |
| eCl@ss 5.1    | 27049002 |
| eCl@ss 6.0    | 27049000 |
| eCl@ss 7.0    | 27049002 |
| eCl@ss 9.0    | 27040701 |

### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC002540 |
| ETIM 6.0 | EC002540 |
| ETIM 7.0 | EC002540 |

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 39121004 |
| UNSPSC 18.0 | 39121004 |

# Power supply unit - TRIO-PS-2G/1AC/12DC/5/C2LPS - 2903157

## Classifications

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 19.0 | 39121004 |
| UNSPSC 20.0 | 39121004 |
| UNSPSC 21.0 | 39121004 |

## Approvals

### Approvals

#### Approvals

UL Listed / UL Recognized / cUL Recognized / IECEE CB Scheme / cUL Listed / EAC / EAC / cULus Recognized / cULus Listed

#### Ex Approvals

UL Listed / cUL Listed / cULus Listed

### Approval details

|                 |  |                                                                                                                                                       |               |
|-----------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| UL Listed       |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 123528 |
| UL Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 211944 |
| cUL Recognized  |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 211944 |
| IECEE CB Scheme |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a>                                                                                             | DK-50730-UL   |
| cUL Listed      |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 123528 |

## Power supply unit - TRIO-PS-2G/1AC/12DC/5/C2LPS - 2903157

### Approvals

|     |  |                          |
|-----|--|--------------------------|
| EAC |  | RU S-<br>DE.BL08.W.00764 |
|-----|--|--------------------------|

|     |  |                          |
|-----|--|--------------------------|
| EAC |  | RU S-<br>DE.BL08.W.00764 |
|-----|--|--------------------------|

|                  |  |  |
|------------------|--|--|
| cULus Recognized |  |  |
|------------------|--|--|

|              |  |  |
|--------------|--|--|
| cULus Listed |  |  |
|--------------|--|--|

### Accessories

#### Accessories

#### Device protection

Type 3 surge protection device - PLT-SEC-T3-230-FM-PT - 2907928



Type 2/3 surge protection, consisting of protective plug and base element with Push-in connection. For single-phase power supply network with integrated status indicator and remote signaling. Nominal voltage: 230 V AC/DC

Type 3 surge protection device - PLT-SEC-T3-24-FM-PT - 2907925



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 24 V AC/DC