

OV-24DC/280AC/4

This product has been replaced by a newer version.

Order No.: 2904010



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2904010>

Solid-state relay, for signal amplification and isolation of the control and load circuits, can be plugged in the solderable plug-in bases SIM-AMS or with PCB connection for mounting directly onto the PCB, input: 3-32 V DC, output: 24-280 V AC/ 5 A

Commercial data

EAN	4017918079116
Pack	25 pcs.
Customs tariff	85364900
Weight/Piece	0.022624 KG
Catalog page information	Page 241 (IF-2005)

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Width	43.2 mm
Height	25.4 mm
Depth	10.2 mm
Ambient temperature (operation)	-30 °C ... 80 °C

Certificates / Approvals




Certification


CUL, GOST, UL

Drawings


Diagram

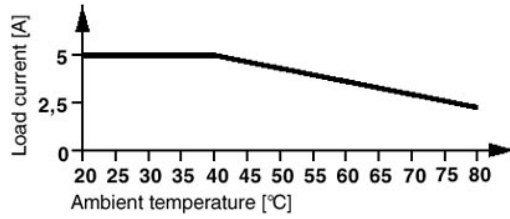

Dimensioned drawing

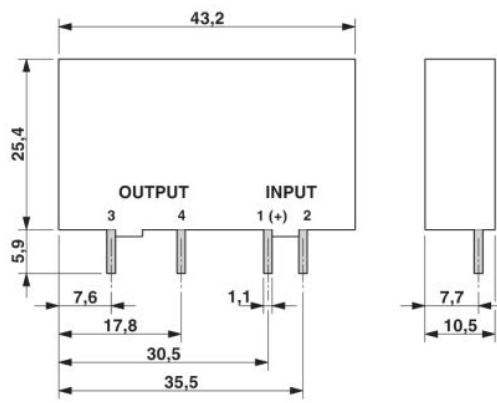

Circuit diagram

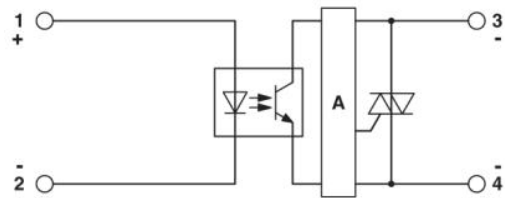

A = zero voltage switch

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2009 Phoenix Contact
Technical modifications reserved;