

Passive module - UM 45-FLK14/ 8IM/PLC - 2962887


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE COMPACT LINE, sensor module for the connection of 8 p-n-p sensors, for assembly on DIN rail NS 35/7.5, screw connection



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 017918 087487 |
| Weight per Piece (excluding packing) | 106.8 g |
| Custom tariff number | 85369010 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|--------|-------|
| Width | 75 mm |
| Height | 45 mm |
| Depth | 51 mm |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

General

| | |
|--|-----------|
| Max. perm. operating voltage | < 50 V AC |
| | 60 V DC |
| Max. perm. current (per branch) | 1 A |
| Max. permissible current (separate power supply) | 3 A |

Passive module - UM 45-FLK14/ 8IM/PLC - 2962887

Technical data

General

| | |
|-----------------------|-------------|
| Number of positions | 14 |
| Mounting position | any |
| Standards/regulations | IEC 60664 |
| | DIN VDE 110 |
| Degree of pollution | 2 |
| Overvoltage category | II |

Connection data for connection 1

| | |
|----------------------------------|--|
| Connection name | Field level |
| Connection method | Screw connection |
| Stripping length | 6 mm |
| Screw thread | M3 |
| Conductor cross section solid | 0.14 mm ² ... 1.5 mm ² |
| Conductor cross section flexible | 0.14 mm ² ... 1.5 mm ² |
| Conductor cross section AWG | 26 ... 14 |

Standards and Regulations

| | |
|-----------------------|-------------|
| Standards/regulations | IEC 60664 |
| | DIN VDE 110 |
| Degree of pollution | 2 |
| Overvoltage category | II |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27250313 |
| eCl@ss 4.1 | 27250313 |
| eCl@ss 5.0 | 27250313 |
| eCl@ss 5.1 | 27250313 |
| eCl@ss 6.0 | 27371601 |
| eCl@ss 7.0 | 27371601 |
| eCl@ss 8.0 | 27141152 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001437 |
| ETIM 3.0 | EC001437 |
| ETIM 4.0 | EC001437 |
| ETIM 5.0 | EC002780 |

Passive module - UM 45-FLK14/ 8IM/PLC - 2962887

Classifications

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211824 |
| UNSPSC 7.0901 | 39121421 |
| UNSPSC 11 | 39121421 |
| UNSPSC 12.01 | 39121421 |
| UNSPSC 13.2 | 39121421 |

Approvals

Approvals

Approvals

EAC

Ex Approvals


Approvals submitted

Approval details

EAC

Drawings

Circuit diagram

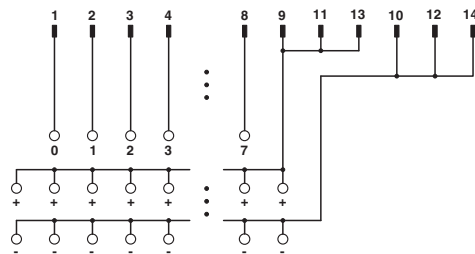

UM 45-FLK14/8IM/PLC connection scheme