
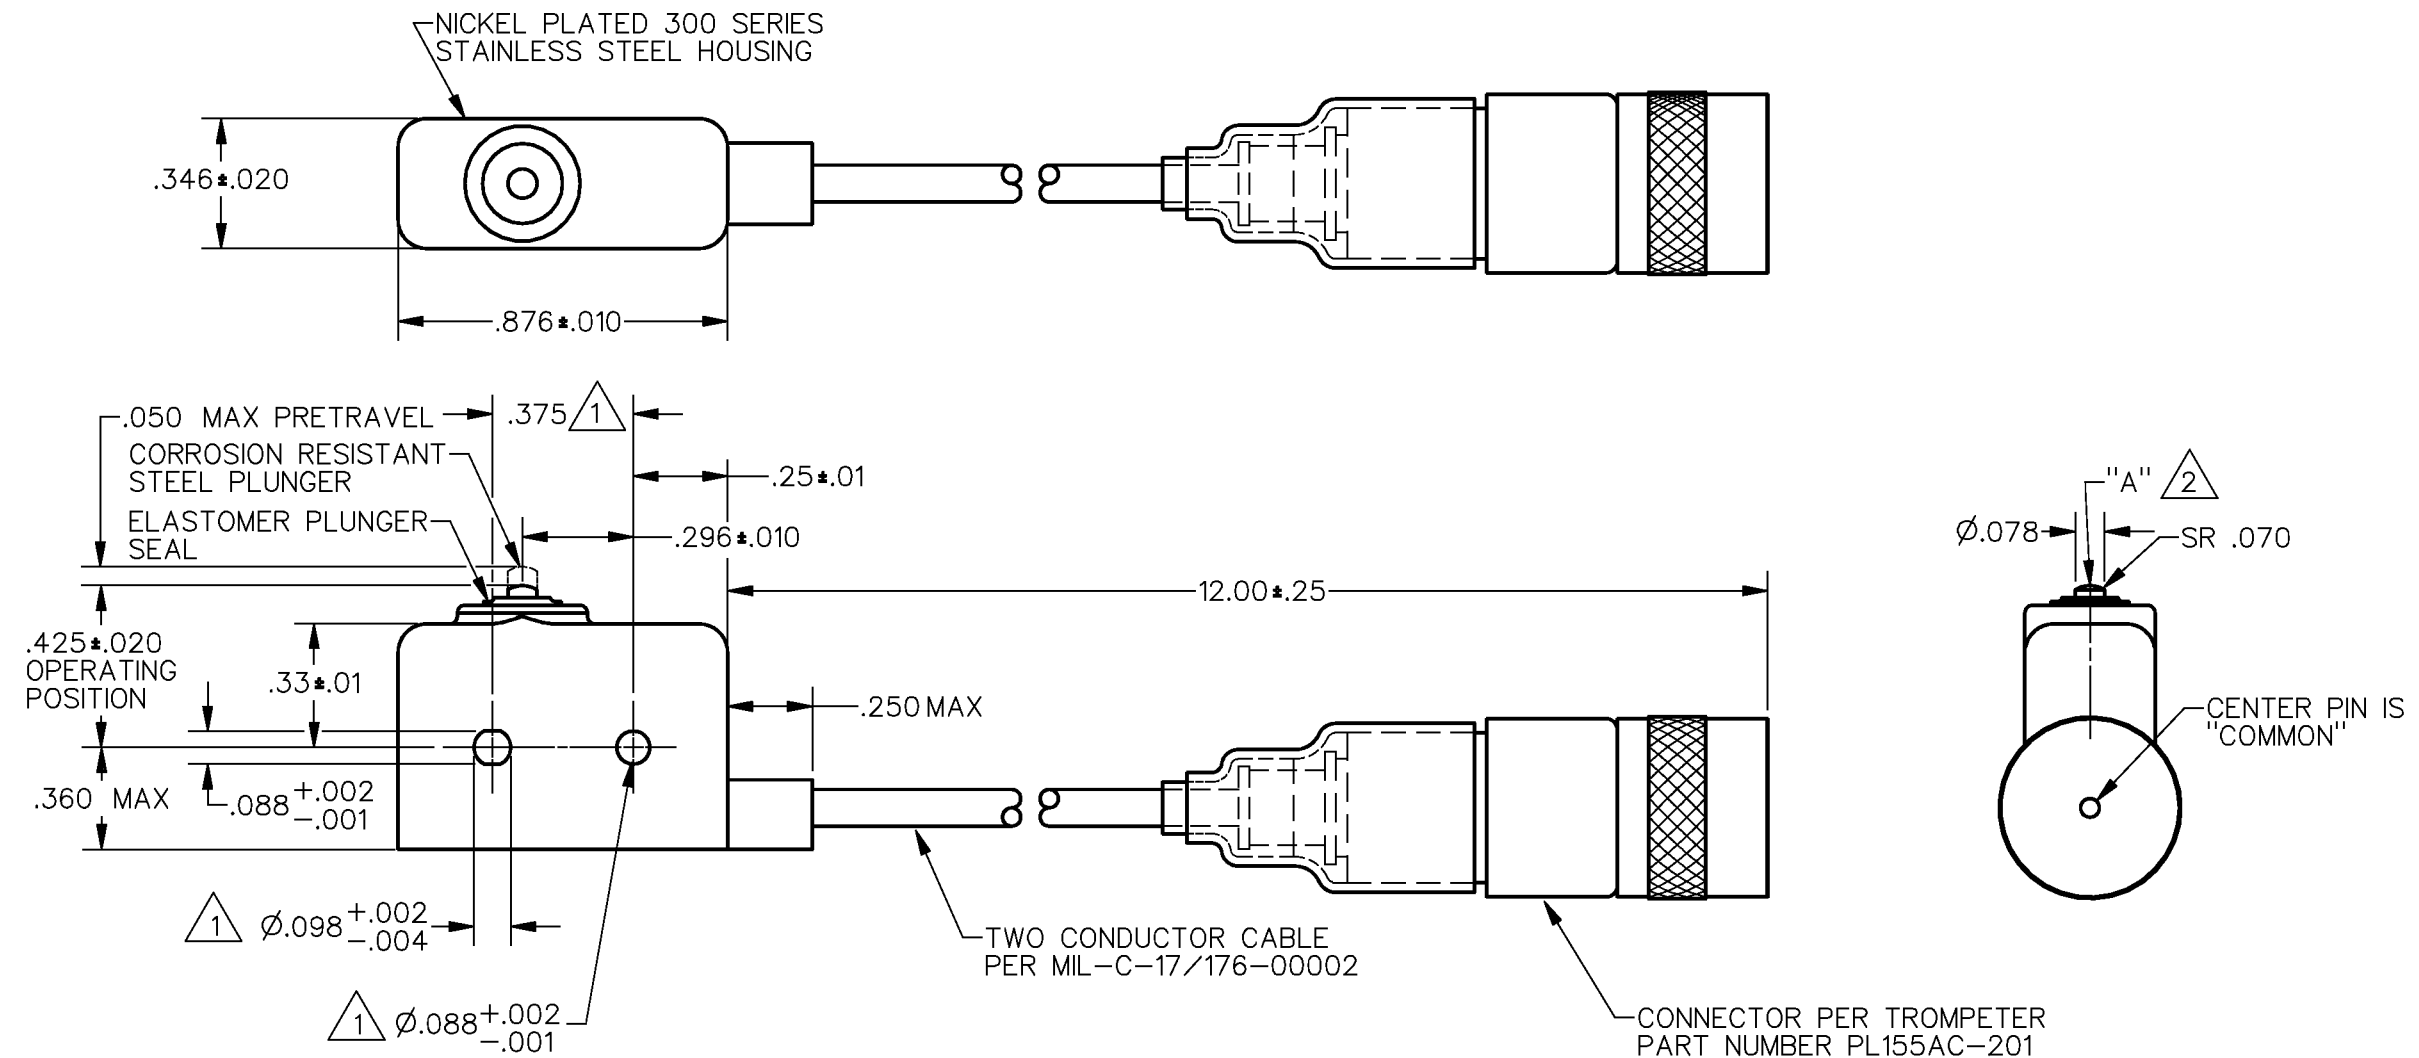




NOTES

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .375±.002 CENTERS
 ② ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
 3 - LEADWIRE SHIELDING GROUNDED TO HOUSING
 4 - BASIC SWITCH HAS 24K SOLID GOLD CONTACT MATERIAL
 5 - FOR USE IN TEMPERATURE RANGE: -65°F TO +221°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION 	
CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE----- 5 - 17 OZ		CONTACT ARRANGEMENT	
RELEASE FORCE ----- 4 OZ MIN		S P N C	
RELEASE TRAVEL ----- .004 MIN		10 VDC ----- 0.5 MA	
DIFFERENTIAL TRAVEL ----- .004 MAX		30 VOLTS DC RATING	
OVERTRAVEL ----- .003 MIN		INDUCTIVE -----SEA LEVEL ---- 1/2 AMP	
		50,000 FT ---- 1/2 AMP	
		RESISTIVE -----SEA LEVEL ---- 1 AMP	
		50,000 FT ---- 1 AMP	
		MAXIMUM INRUSH ----- 2 AMP	
		SCALE 2:1	
		DO NOT SCALE PRINT	
		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
		ONE PLACE (.0) ±.030	
		TWO PLACE (.00) ±.015	
		THREE PLACE (.000) ±.005	
		ANGLES ±	
		WEIGHT 50 GRAMS MAX	

ANSI Y14.5M-1982 APPLIES