

HONEYWELL PART NUMBER
2SX84-HF
PRODUCT CODE VDC1927

REV	DOCUMENT	CHANGED BY	CHECK
5	0038447	SS 28MAR08	BLR

B


B

A

A

A

A

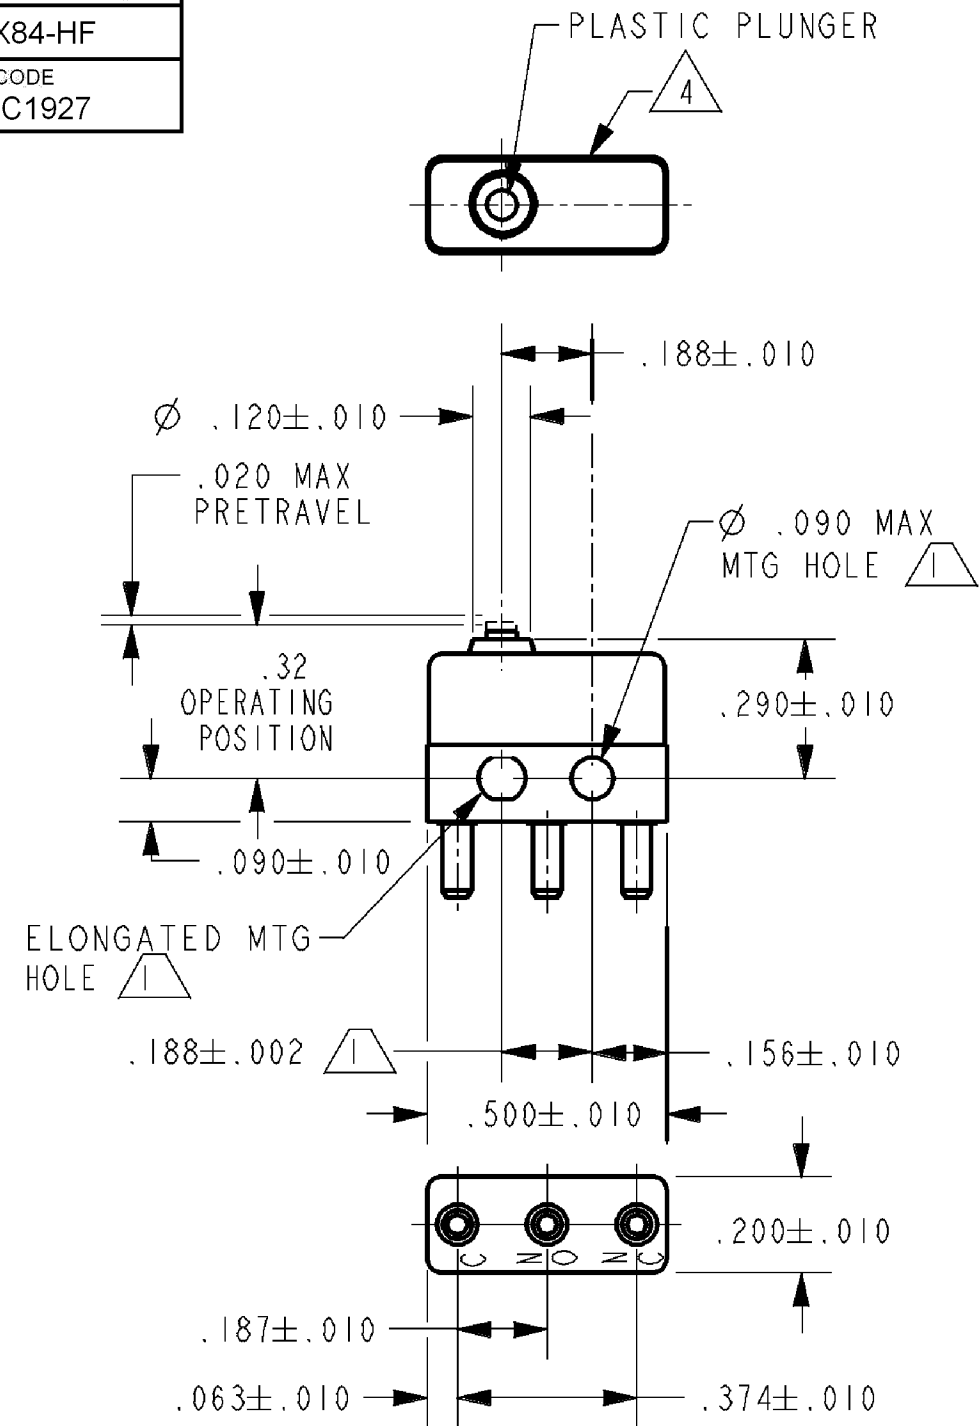

2SX84- HF
VIEW A-A

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .087$ MAX ON $.188 \pm .002$ CENTERS
 - 2 TERMINALS ARE PLATED FOR SOLDERING
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
 - 4 2SX84- HF TO BE BRANDED ON RIGHT SIDE ONLY

RELEASE NO.	PR-23391
REPLACES	X1010982-SX

CHARACTERISTICS	
OPERATING FORCE	3.5 OZ MAX
RELEASE FORCE	1 OZ MIN
DIFFERENTIAL TRAVEL	.005 MAX
OVERTRAVEL	.004 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT SPDT		
28 VOLTS DC RATING		
	SEA LEVEL	50,000 FT
INDUCTIVE	4 AMP	2.5 AMP
RESISTIVE	7 AMP	7 AMP
MAXIMUM INRUSH 24 AMP		
APPROVALS	KEMA, CE	7A 250V ~ T125 5E4
	UL, CSA	7A 250 VAC

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X \pm
ONE PLACE .X \pm
TWO PLACE .XX \pm
THREE PLACE .XXX \pm
FOUR PLACE .XXXX \pm
ANGLES \pm
THIRD ANGLE PROJECTION

DRAWN	SPK	04FEB08
CHECK	RJ	04FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	2SX84-HF	5
SCALE	-	WEIGHT: .003 LB MAX	SHEET 1 OF 1