MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH-TOGGLE FLUSH KEY

CATALOG LISTING

2TP1-10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

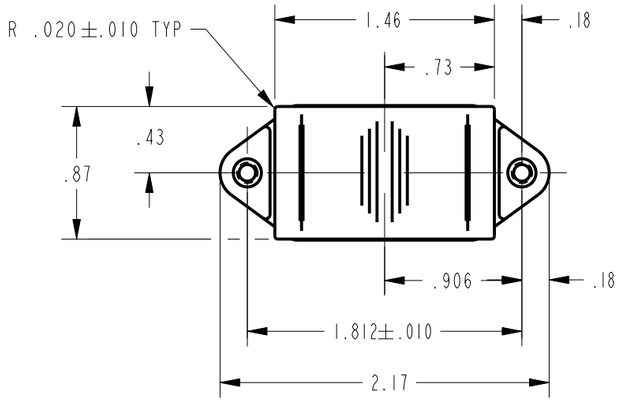

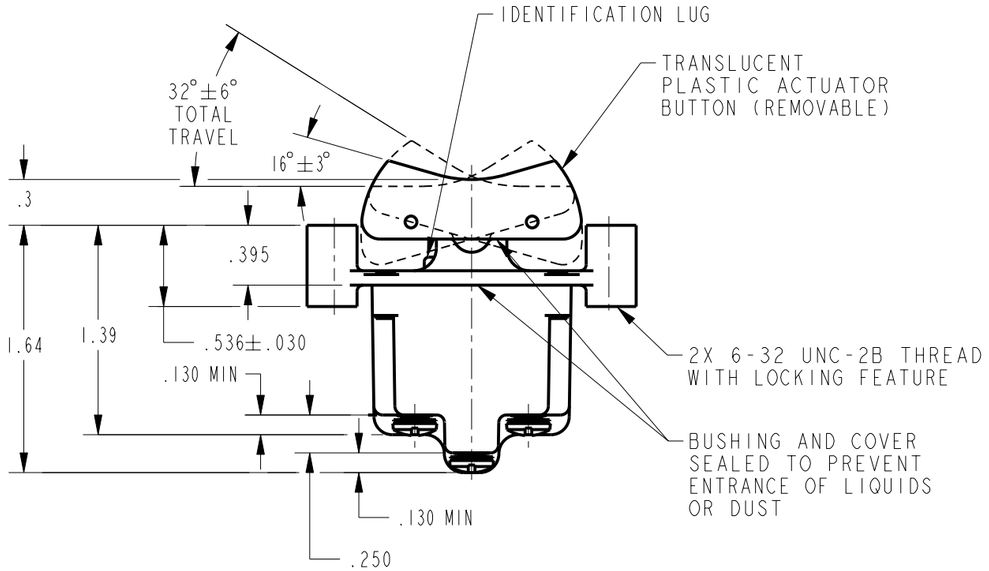

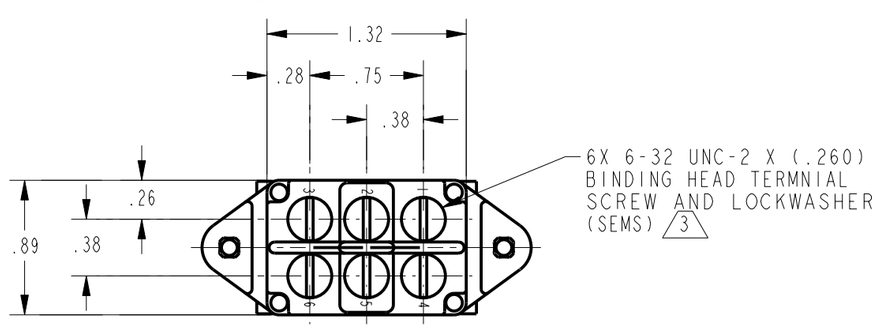

ANSI Y14.5M-1982 APPLIES

CIRCUIT DIAGRAM

LUG SIDE (MAINTAINED POSITION)	CENTER (MAINTAINED POSITION)	OPPOSITE LUG (MAINTAINED POSITION)
		

ELECTRICAL DATA

L191 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"

NOTES
1 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
2 - THESE SWITCHES WILL WITHSTAND TEMPERATURE OF 160°F
3 SCREWS FURNISHED UNASSEMBLED

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .14 LB EST

CATALOG LISTING 2TP1-10 | PAGE 1 OF 1 | RELEASE NO. PR-2926 | REPLACES -

ISSUE 17

REVISIONS

A	204633 TRF 08JAN02	JLH	12DEC01	SAV	12DEC01	PTC/CAD 2D
DRAWN		CHECK		CHECK		