


# CIRCUIT BREAKERS & SWITCH ACCESSORIES

## MINIATURE PUSH BUTTON CIRCUIT BREAKER

### Approvals


\*  Approval: 3 -15 A 125/250 VAC



TERMINAL




Ø: 6.3m/m



### Specifications:

Standard Rating: 3-20 AMPERE.  
 Input Power: 125 VAC / 250 VAC.  
 Dielectric Strength: 1500 VAC / 1 Minute.  
 Interrupt Capacity: 125 VAC x 1000 A, 250 VAC x 1000 A.  
 Insulation Resistance: > 100 Meg Ohm.  
 Calibration: 25°C-105°C of rated Current-Continuously Carried.  
 25°C-Between 101% to 145%-May Trip or not.  
 25°C-150% of Rated current-Trip Within 1 Hour.  
 25°C-200% of Rated Current-Trip Within 1 Minute.  
 Contact Endurance: 125 VAC x 1505 of rated current-500 Cycles.  
 Reset: Manual push reset/auto reset.

### Trip Time Curve

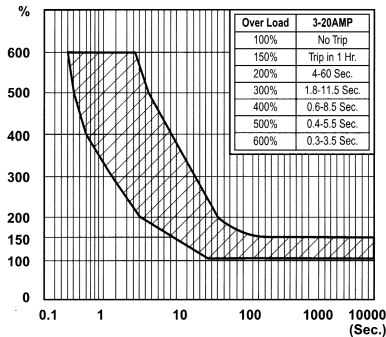

Part No.	Amps	Maximum Resistance in ohms
30-6003	3	0.120
30-6004	4	0.120
30-6005	5	0.100
30-6015	15	0.008
30-6018	18	0.007
30-6020	20	0.007

## Special Switch Accessories



### No. 30-1450

fits SP Rocker switches up to 15mm (.59") X 21mm (.82")



### No. 30-1455

fits DP Rocker switches up to 24mm (.94") X 21mm (.82")



### No. 30-1600

fits Round Rocker switches up to 23mm (.90") dia.



### No. 30-1000

fits Miniature & Sub Miniature toggle switch




### No. 30-1400

fits Push Button Switches with 15/32" X 32 bushing

## TOGGLE SWITCH SAFETY GUARD

### Features

Rugged Spring-loaded Design  
 Black Steel Base w/ Red urea Plastic Cover  
 Fits ALL Metal Lever toggles w/ 15/32 X 32 Bushing

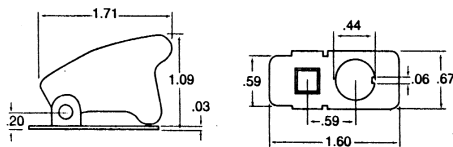

### No. 30-1250 Toggle Switch Guard

## Key Switch Protective Cover


This cover is designed to fit on standard key switches such as Philmore 30-10076 and 30-1190 series and others to protect them from moisture and damage.



### No. 30-10079 Key Switch Cover


## TOGGLE SWITCH HARDWARE

Part No.  
30-1320



Rubber Boot  
Thread Size: 15/32-32

Part No.  
30-1200



Rubber Boot  
Thread Size: M12 x 1.0

Part No.  
30-2200B



\* Available in Bulk only.