


SWITCHES ROCKER

AC/DC HEAVY DUTY ROCKER SWITCHES

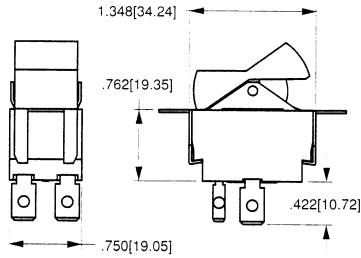

Mounting Hole: 0.83" x 1.45"


SPECIFICATIONS:

| | |
|-------------------------------|--|
| Current Rating: | 15A @ 125V AC, 10A @ 250V AC 3/4 HP @ 125-250V AC |
| Insulation Resistance: | 100 Meg ohm (Min.) |
| Dielectric Strength: | 1000V (Min.) |
| Base Material: | Phenolic |
| Terminal Type: | .250" Quick Connect |

| Part No. | Type | Action | | | Actuator |
|----------|------|--------|-----|------|-------------|
| 30-16600 | SPST | ON | - | OFF | Black Nylon |
| 30-16610 | SPDT | ON | - | ON | Black Nylon |
| 30-16620 | SPDT | ON | OFF | ON | Black Nylon |
| 30-16630 | DPST | ON | - | OFF | Black Nylon |
| 30-16660 | DPST | (ON) | - | OFF | Black Nylon |
| 30-16640 | DPDT | ON | - | ON | Black Nylon |
| 30-16680 | DPDT | ON | - | (ON) | Black Nylon |

Note: () = Momentary

HEAVY DUTY ROCKER SWITCHES

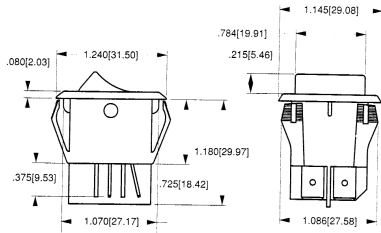

Mounting Hole: 0.872" x 1.072"


SPECIFICATIONS:

| | |
|-------------------------------|--|
| Current Rating: | 20A @ 125V AC, 15A @ 250VAC, 125A Peak Inrush current |
| Insulation Resistance: | 100 Meg ohm (Min.) |
| Dielectric Strength: | 1000V (Min.) |
| Base Material: | Nylon |
| Terminal Type: | .250" Quick Connect |

| Part No. | Type | Action | | | Actuator |
|-----------|------|--------|---|-----|-----------------------------|
| 30-16564 | DPST | ON | - | OFF | Black Nylon |
| 30-16625* | DPST | ON | - | OFF | Black Nylon w/on-off Legend |

* 30-16625 = 3/4HP 125-250VAC

"V" STYLE ROCKER SWITCHES

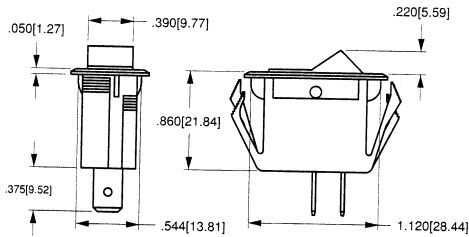

Mounting Hole: 0.55" x 1.125"

SPECIFICATIONS:


| | |
|-------------------------------|---|
| Current Rating: | 10A @ 125VAC, 5A @ 250 VAC, 1/2HP 125-250VAC |
| Insulation Resistance: | 100 Meg ohms (Min.) |
| Dielectric Strength: | 1000V (Min.) |
| Base Material: | Nylon |
| Terminal Type: | .250" Quick Connect |

| Part No. | Type | Action | | | Actuator |
|-----------|------|--------|---|-------|-------------|
| 30-370 | SPST | ON | - | (OFF) | White Nylon |
| 30-16751* | SPST | OFF | - | (ON) | White Nylon |


Note: () = Momentary

* 30-16751 = 15A @ 125VAC, 10A @ 250VAC, 3/4HP 125-250VAC

SEALED LIGHTED ROCKER SWITCHES



Mounting Hole: 0.83" x 1.45"

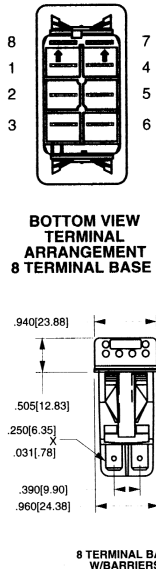

8 TERMINAL BASE W/BARRIERS

SPECIFICATIONS:

| | |
|------------------------------------|---|
| Current Rating: | 20A @ 12VDC |
| Initial Contact Resistance: | 10 Milli ohms (Max) @ 4VDC |
| Insulation Resistance: | 50 Meg ohms |
| Dielectric Strength: | 1500 Volts RMS |
| Contact Material: | Silver CAD-Oxide, Silver Tin-Oxide, Fine Silver |
| Terminal Material: | Brass or Copper/Silver Plate |
| Terminal Type: | .250" Quick Connect |

| Part No. | Type | Action | | | Actuator |
|-----------|------|--------|-----|------|-----------------------|
| 30-16500 | SPST | ON | - | OFF | Black with Amber Lens |
| 30-16505 | SPST | ON | - | OFF | Black with Green Lens |
| 30-16510 | SPST | ON | - | OFF | Black with Red Lens |
| 30-16515 | SPST | ON | - | OFF | Black with Blue Lens |
| 30-16520 | DPDT | ON | OFF | ON | Black with Amber Lens |
| 30-16525 | DPDT | ON | OFF | ON | Black with Green Lens |
| 30-16530 | DPDT | ON | OFF | ON | Black with Red Lens |
| 30-16535 | DPDT | ON | OFF | ON | Black with Blue Lens |
| 30-16560 | DPDT | (ON) | OFF | (ON) | Black with Amber Lens |
| 30-16565 | DPDT | (ON) | OFF | (ON) | Black with Green Lens |
| 30-16570 | DPDT | (ON) | OFF | (ON) | Black with Red Lens |
| 30-16575 | DPDT | (ON) | OFF | (ON) | Black with Blue Lens |
| 30-16580* | SPST | ON | - | OFF | Black Nylon** |
| 30-16585 | DPDT | ON | - | ON | Black Nylon** |
| 30-16590 | DPDT | ON | OFF | ON | Black Nylon** |

Note () = Momentary

* 30-16580 15A @ 125VAC, 10A @ 250VAC, 1/2HP 125-250VAC, UL/CSA

** = Non Lighted

Lamp is incandescent 12V Rated @ 10,000 Hrs.