



Specifications:  
 Current Rating:3.0A AC,DC  
 Voltage Rating:250V AC, DC  
 Contact Resistance:20m ohm Max  
 Insulation Resistance:1,000M ohm Min  
 Withstanding Voltage:600V AC/minute  
 Operating Temperature Range:-40°C ~ +105°C

Materials:  
 Insulator:Nylon 6T(UL94V-0)  
 Insulator Color:Black  
 Terminal:Copper Alloy  
 Finish:Gold Flash

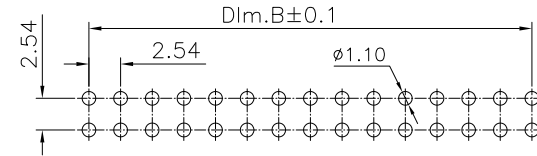


P.C.B Layout

MATING PART  
3030-XX-0102-00

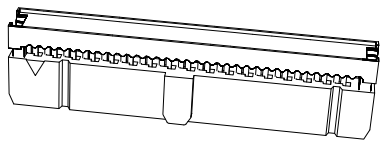

MATING PART  
3030-XX-0101-00

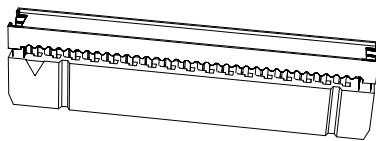

Pos	Dim A	Dim B	Dim C	Pos	Dim A	Dim B	Dim C
6	15.24	5.08	12.94	26	40.64	30.48	38.34
8	17.78	7.62	15.48	30	45.72	35.56	43.42
10	20.32	10.16	18.02	34	50.80	40.64	48.50
12	22.86	12.70	20.56	40	58.42	48.26	56.12
14	25.40	15.24	23.10	50	71.12	60.96	68.82
16	27.94	17.78	25.64	60	83.82	73.66	81.52
20	33.02	22.86	30.72	64	88.90	78.74	86.60
24	38.10	27.94	35.80				

RoHS Compliant

				DRAWN: Romina Wu	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED: Jerry Chen	UNIT: MM		
				APPROVAL: Rory Chen	SCALE:1:1	PART NO: 3020-XX-0100-00	SIZE A4
REV	DATE	FILE	BY		SHEET: 1 / 1		
					PROJECTION:		