


HONEYWELL  
PART NUMBER  
311SM604-H4  
PRODUCT CODE  
TZA2711

REV	DOCUMENT	CHANGED BY	CHECK
6	0038114	KVS 03JUN08	ASD

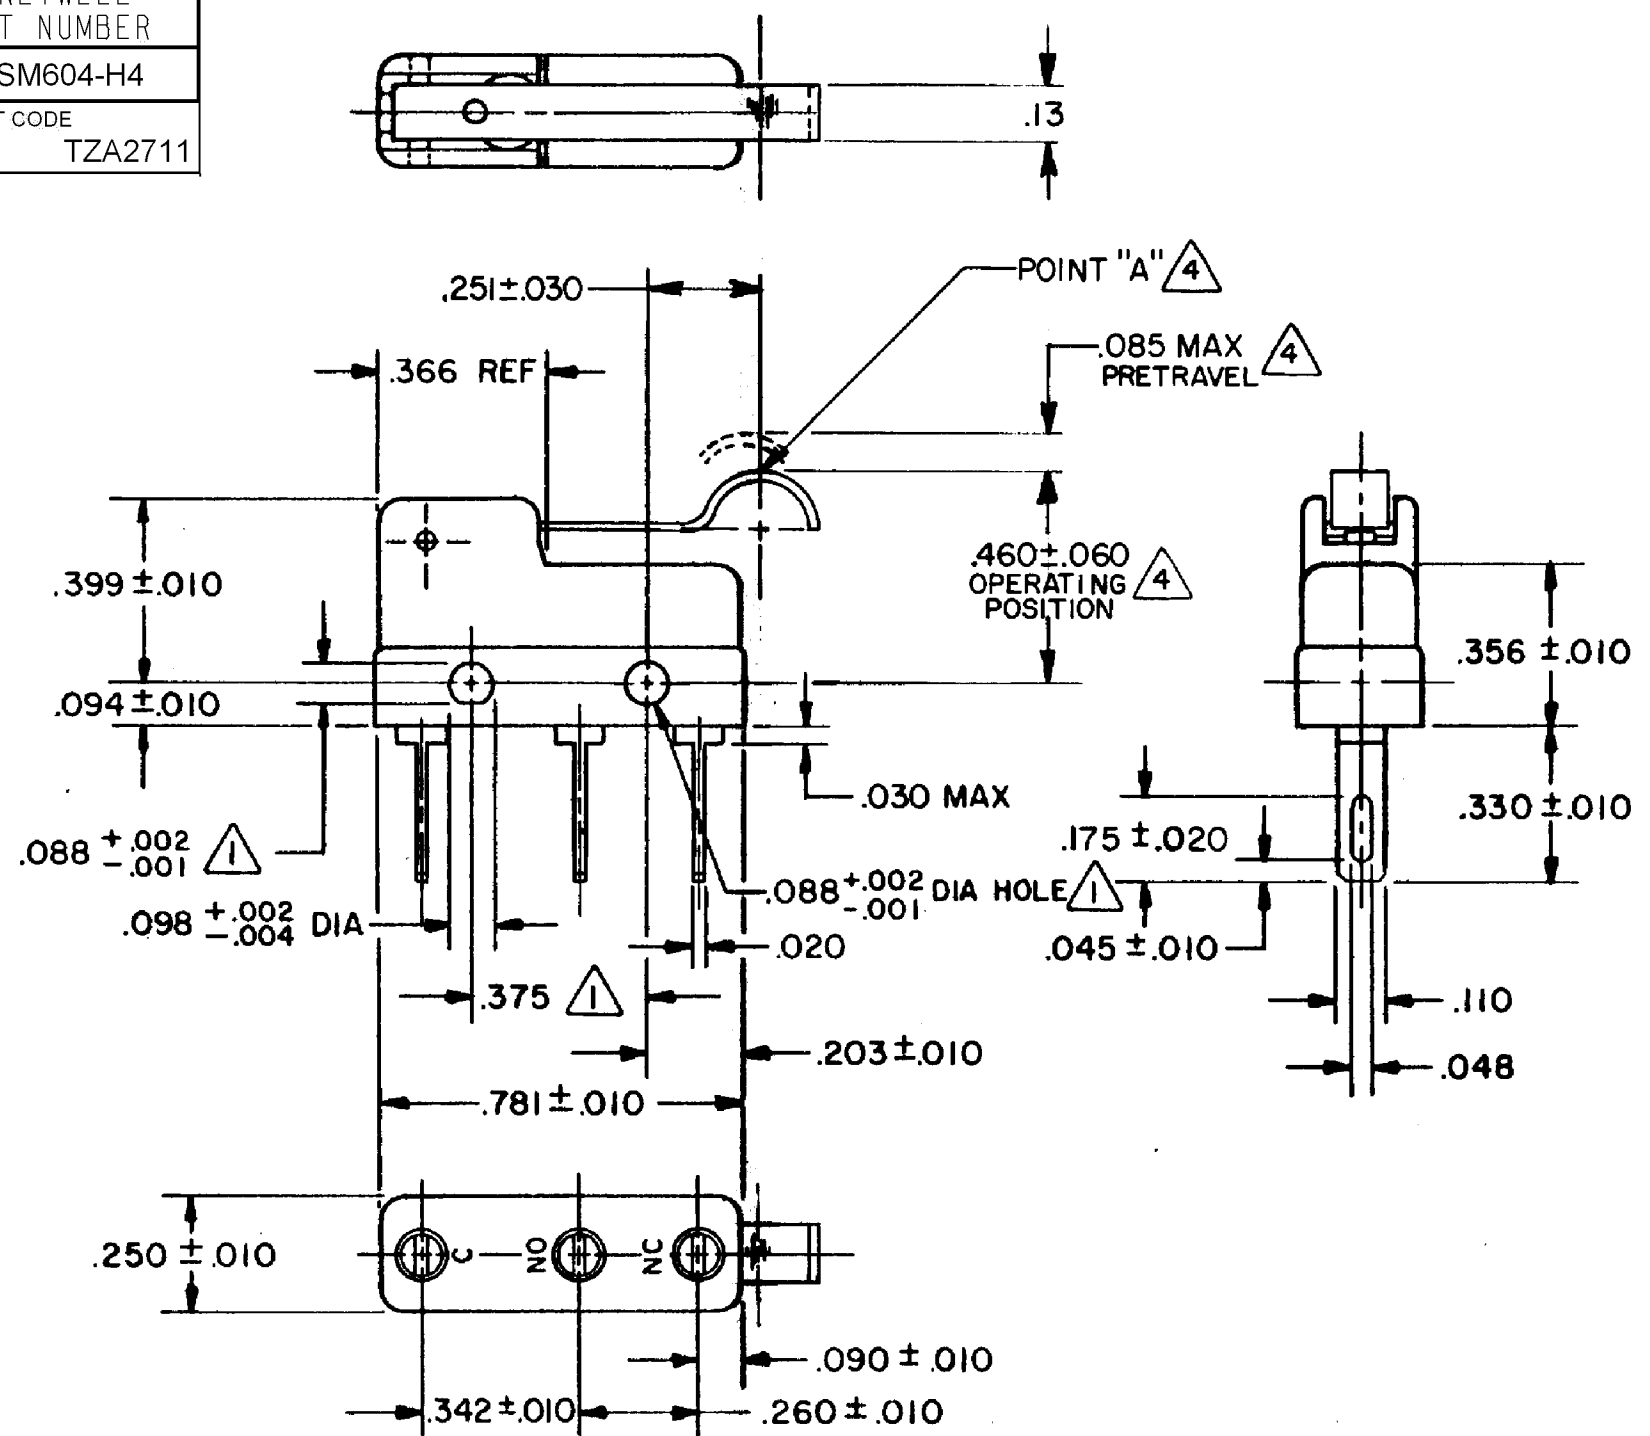

NOTES

- (1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
- (4) CHARACTERISTICS TAKEN AT POINT "A"

RELEASE NO. PR - 3752

REPLACES

CHARACTERISTICS (4)
OPERATING FORCE -- 40 GRAM MAX
RELEASE FORCE -- 7 GRAM MIN
DIFFERENTIAL TRAVEL -- .019 MAX
OVERTRAVEL -- .018 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT SPDT		
30 VOLTS DC RATING		
	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP
MAXIMUM INRUSH 24 AMP		
APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4
	UL, CSA	5A, 250 VAC

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	VK	12 NOV 07
CHECK	RJ	12 NOV 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

<b>Honeywell</b>			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	311SM604-H4	6
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1