



HONEYWELL
PART NUMBER
311SM719-T
PRODUCT CODE
TZA2695

REV	DOCUMENT	CHANGED BY	CHECK
8	0038445	SSK 28APR08	BLR

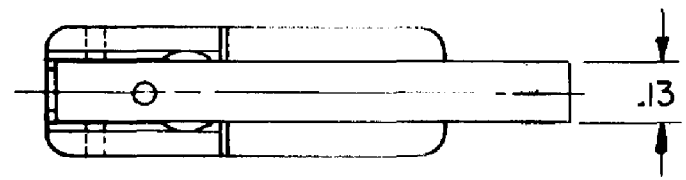

B

B

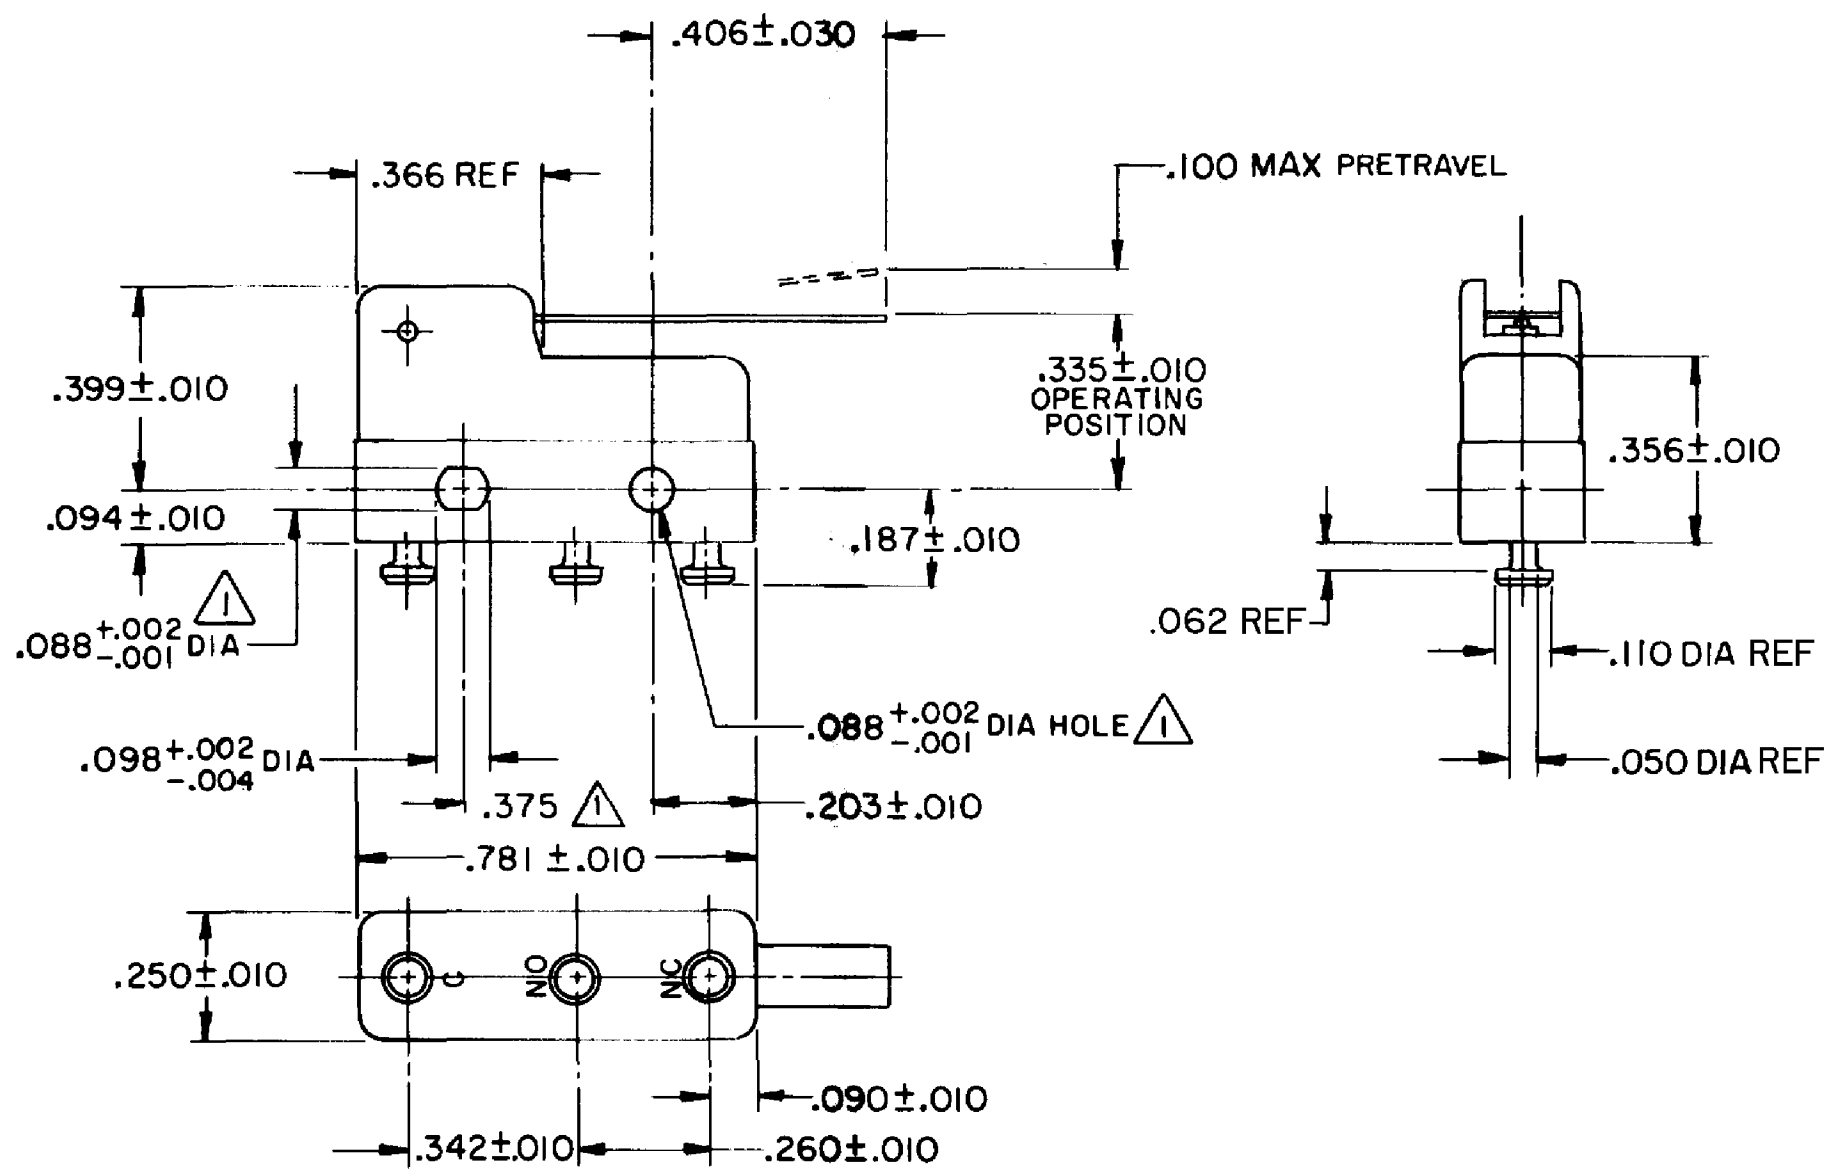

NOTES

- ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.087$ MAX DIA ON $.375 \pm .002$ CENTERS
- 2- SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- 3- TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.	PR-573
REPLACES	-

A

A

CHARACTERISTICS	
OPERATING FORCE --	14 GRAM MAX
RELEASE FORCE-- --	2.0GRAM MIN
DIFFERENTIAL TRAVEL-- --	.012 MAX
OVERTRAVEL - - - - -	.023 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT SPDT		
30 VOLTS DC RATING		
	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP
MAXIMUM INRUSH 24 AMP		
APPROVALS	UL, CSA	4A, 250 VAC
		UL, CSA
		UL, CSA

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	VK	25 FEB 08
CHECK	RJ	25 FEB 08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	311SM719-T	8
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1