
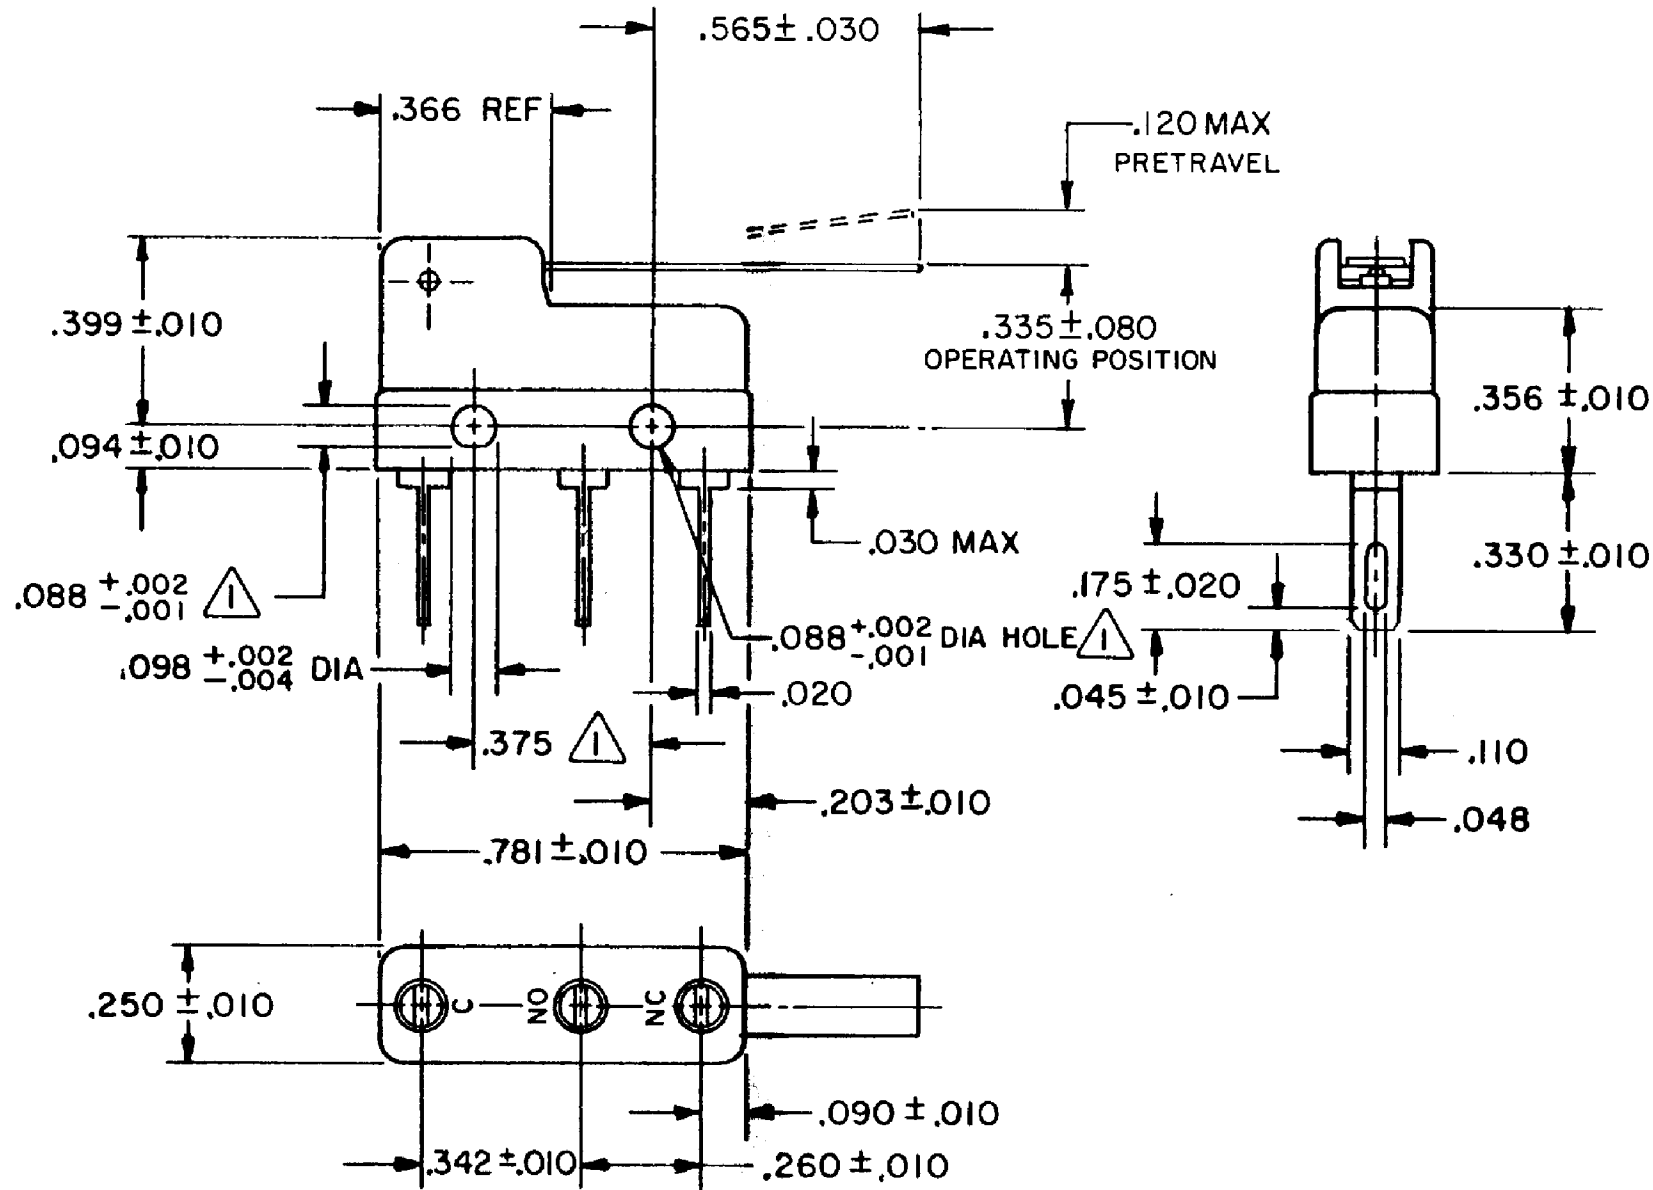


HONEYWELL
PART NUMBER
311SM7602-H4
PRODUCT CODE
TZA2759

REV	DOCUMENT	CHANGED BY	CHECK
9	0038445	SSK 28APR08	BLR

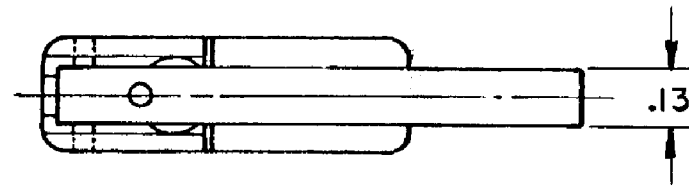

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.	PR-5576
REPLACES	-

CHARACTERISTICS	
OPERATING FORCE --	12 GRAM MAX
RELEASE FORCE--	2 GRAM MIN
DIFFERENTIAL TRAVEL--	.015 MAX
OVERTRAVEL - - - - -	.026 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT SPDT		
30 VOLTS DC RATING		
	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP
MAXIMUM INRUSH 24 AMP		

DESIGN UNITS: INCH	
TOLERANCES UNLESS NOTED:	
NO PLACE	X ±
ONE PLACE	.X ±
TWO PLACE	.XX ±
THREE PLACE	.XXX ±
FOUR PLACE	.XXXX ±
ANGLES	±

DRAWN	VK	26FEB 08
CHECK	RJ	26FEB 08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	311SM7602-H4	9
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1

APPROVALS	UL, CSA	4A, 250 VAC			BRAND L119
-----------	---------	-------------	--	--	------------

