





Headers

to Type 262

-  **Type 263** page 147
-  **Type 264** page 148
-  **Type 265** page 149
-  **Type 266** page 150



Accessories

for Type 262
Coding set
 700025 page 180


Type 262

Screw type terminal block, pluggable, centerline 7.62 mm / 0.300 inches, wire entry parallel to plug direction, lift system, contact system with integrated wire protection

Technical Data

	V / A / AWG	300 / 15 / 28 - 14		
	0.08 - 2.5 mm ²	500 V / 6 kV / 12 A		
Insulation co-ordination according to IEC 664-1				
Clearance and creepage distances		min. 6.1 mm		
Insulating material class		CTI 600		
Overvoltage category	III	III	II	
Pollution degree	3	2	2	
Rated voltage	400	1000	1000	
Rated test voltage	4	8	6	
Protection category according to IEC 529		IP20		
Tightening torque UL		4.5 lb-in max.		
Min. insul. strip length		8 mm		
Pole size		2 - 12		
Color		black		

Dimensions in mm 1 mm = 0.0394 in.

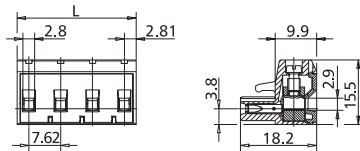

L = (pole size - 1) x centerline + 5.62 mm / 0.221 inches

Part numbers (P/N)

(informations: page 60)

Complete the part number by adding the pole size.

Type 262

centerline 7.62 mm / 0.221 inches

P/N 312621

	02	03	04	05	06	07	08
	09	10	11	12			

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.