

# THT Labels: General Identification


www.BradyID.com

3" Core General ID Labels:

## B-483 Polyester Labels

Color: White Finish: Gloss

White polyester thermal transfer label with glossy finish and aggressive adhesive specifically designed for powder coated surfaces.

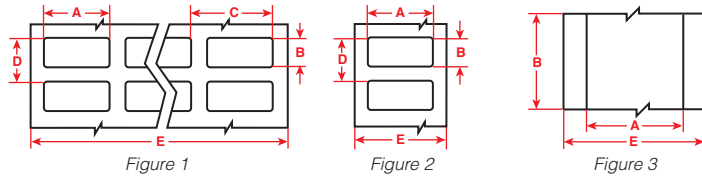


| Diagram  | Part Number       | Material  | Color | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Horiz. Repeat C<br>Inch (mm) | Vert. Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Pkg | Rec.<br>Ribbon |
|--|-------------------|-----------|-------|----------------------------|-----------------------------|------------------------------|-----------------------------|--------------------------|-------------------|-------------------|----------------|
| Fig. 1   | THT-5-483-10      | Polyester | White | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 10,000            | R6007          |
| Fig. 2   | THT-59-483-10     | Polyester | White | 1.000 (25.4)               | 0.500 (12.7)                | -                            | 0.600 (15.2)                | 1.200 (30.5)             | 1                 | 10,000            | R6006          |
| Fig. 1   | THT-37-483-10     | Polyester | White | 1.500 (38.1)               | 0.500 (12.7)                | 1.650 (41.9)                 | 0.600 (15.2)                | 3.350 (85.1)             | 2                 | 10,000            | R6007          |
| Fig. 3   | THT-106-483       | Polyester | White | 2.000 (50.8)               | 300 ft. (91.4 m)            | -                            | 300 ft. (91.4 m)            | 2.200 (55.9)             | 1                 | 1 Roll Cont.      | R6000          |
| Fig. 2   | THT-17-483-3      | Polyester | White | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 3,000             | R6000          |
| Fig. 2   | THT-7-483-3       | Polyester | White | 2.750 (69.9)               | 1.250 (31.8)                | -                            | 1.375 (34.9)                | 2.950 (74.9)             | 1                 | 3,000             | R6002          |
| Fig. 2   | THT-18-483-3      | Polyester | White | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 3,000             | R6002          |
| Fig. 2   | THT-19-483-1      | Polyester | White | 3.000 (76.2)               | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 3.200 (81.3)             | 1                 | 1,000             | R6002          |
| Fig. 3   | THT-21-483        | Polyester | White | 3.000 (76.2)               | 300 ft. (91.4 m)            | -                            | 300 ft. (91.4 m)            | 3.200 (81.3)             | 1                 | 1 Roll Cont.      | R6002          |
| Fig. 3   | THT-107-483       | Polyester | White | 4.000 (101.6)              | 300 ft. (91.4 m)            | -                            | 300 ft. (91.4 m)            | 4.200 (106.7)            | 1                 | 1 Roll Cont.      | R6007          |
| Fig. 2   | THT-161-483-1     | Polyester | White | 4.000 (101.6)              | 4.000 (101.6)               | -                            | 4.125 (104.8)               | 4.200 (106.7)            | 1                 | 1,000             | R6007          |
| Fig. 2   | THT-55-483-1      | Polyester | White | 4.000 (101.6)              | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 4.200 (106.7)            | 1                 | 1,000             | R6007          |
| Fig. 2   | THT-76-483-1      | Polyester | White | 4.000 (101.6)              | 3.000 (76.2)                | -                            | 3.125 (79.4)                | 4.200 (106.7)            | 1                 | 1,000             | R6007          |
| <p><b>NOTICE BBP<sup>®</sup>11 PRINTER ONLY:</b> The following part numbers ending with "-SC" are 1" Small Core Rolls specially designed for use in the BBP11 Printer and do not require the BBP11 media adaptor accessory. View page 68 for more information.</p> |                   |           |       |                            |                             |                              |                             |                          |                   |                   |                |
| Fig. 1   | THT-5-483-5-SC    | Polyester | White | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 5,000             | R6013          |
| Fig. 2   | THT-17-483-1.5-SC | Polyester | White | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 1,500             | R6013          |
| Fig. 2   | THT-18-483-1.5-SC | Polyester | White | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 1,500             | R6013          |

3" Core General ID Labels:

## B-484 Polyester Labels

Color: White Finish: Gloss

White polyester thermal transfer label is similar to B-483, but with thinner construction for curved or angled surfaces. Offers aggressive adhesive for adhesion to textured metals and low surface energy plastics.

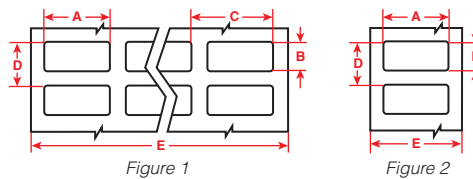

| Diagram | Part Number  | Material  | Color | Label Width A<br>Inch (mm) | Label Height B<br>Inch (mm) | Horiz. Repeat C<br>Inch (mm) | Vert. Repeat D<br>Inch (mm) | Web Width E<br>Inch (mm) | Labels<br>Per Row | Labels<br>Per Pkg | Rec.<br>Ribbon |
|---------|--------------|-----------|-------|----------------------------|-----------------------------|------------------------------|-----------------------------|--------------------------|-------------------|-------------------|----------------|
| Fig. 1  | THT-5-484-10 | Polyester | White | 1.000 (25.4)               | 0.500 (12.7)                | 1.075 (27.3)                 | 0.600 (15.2)                | 3.350 (85.1)             | 3                 | 10,000            | R6007          |
| Fig. 2  | THT-17-484-3 | Polyester | White | 2.000 (50.8)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 2.200 (55.9)             | 1                 | 3,000             | R6000          |
| Fig. 2  | THT-18-484-3 | Polyester | White | 3.000 (76.2)               | 1.000 (25.4)                | -                            | 1.125 (28.6)                | 3.200 (81.3)             | 1                 | 3,000             | R6002          |
| Fig. 2  | THT-55-484-1 | Polyester | White | 4.000 (101.6)              | 2.000 (50.8)                | -                            | 2.125 (54.0)                | 4.200 (106.7)            | 1                 | 1,000             | R6007          |