


**3153 00400001**

( [Home \(/index.php?ci\\_id=3972&la\\_id=1\)](#) : [Products \(/products\)](#) : [Sensors](#) : [Thermostats](#) : 3153 )

Distributor Inventory

Input part number for stock availability

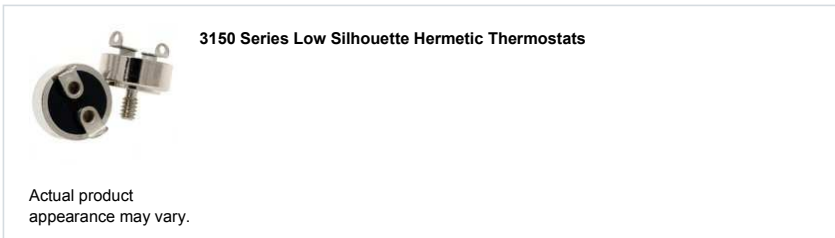

3150 Series Low Silhouette Hermetic Thermostats

Actual product appearance may vary.

[Sales & Service](#)

[Distributor Inventory](#)

[Overview](#)  
 [Specs](#)  
 [Documentation](#)  
 [Application Notes](#)

**Product Specifications**

Functional Properties	Open on rise
Reset Type	Automatic
Amperage	2.0 A resistive
Voltage	30 Vac/Vdc
Operating Temperature	-29 °C to 177 °C [-20 °F to 350 °F]
Environmental Exposure Range	-65 °C to 260 °C [-85 °F to 500 °F]
Open Temperature	55.6 °C [132 °F]
Close Temperature	50.0 °C [122 °F]
Open Tolerance	2.8 °C [5 °F]
Close Tolerance	2.8 °C [5 °F]
Dielectric Strength	MIL-STD-202, Method 301; 1250 Vac 60 Hz - Terminal to Case
Insulation Resistance	MIL-STD-202, Method 302; 500 MOhm
Contact Resistance	MIL-STD-202, Method 307; 0.050 Ohm max.
Hermetic Seal	MIL-STD-202, Method 112; Cond. C
Moisture Resistance	MIL-STD-202, Method 106
Shock	MIL-STD-202, Method 213; 100 G
Vibration	MIL-STD-202, Method 204; 20 G
Thermal Shock	MIL-STD-202, Method 107; Cond. B
Salt Spray	MIL-STD-202, Method 101; Cond. B
Housing Material	Steel housing hermetically sealed with glass-to-metal seal at terminal junction
Contact Material	Silver
Agency Approvals and Standards	Acceptance testing performed in accordance to Mil-PRF-24236, Table III
Mounting	B215 fixed bracket
Series Name	3153

**Narrow Your Search**

**Modify Your Search**

---

**Products**

Select Option

---

**Technology**

Select Option

---

**Industries Served**

Select Option


**Product Search**

Product Type:        New Products Only

Industry:        Entire Product Catalog

Search Term:

**Search**

My Links	Literature and Media	Contacts
<a href="#">Login (/index.php?ci_id=50629&amp;la_id=1)</a> <a href="#">Request Access to eCOM (/ecomaccessrequest)</a> <a href="#">Rep/AD Portal Login</a>	<a href="#">Sheets (/whitepaperandtechnicaldata sheetslibrary) Videos (/videos)</a> <a href="#">Literature (/literature)</a> <a href="#">Literature Request</a>	<a href="#">Service (/index.php?ci_id=50608&amp;la_id=1)</a> <a href="#">Technical Support (/index.php?ci_id=50609&amp;la_id=1)</a> <a href="#">Global Sales &amp; Service (/index.php?ci_id=50610&amp;la_id=1)</a> <a href="#">Website</a>
<a href="http://www.youtube.com/user/SensingAndControl">http://www.youtube.com/user/SensingAndControl</a> <a href="#">ci_id=50606&amp;la_id=1</a> <a href="#">Rep/AD Portal Access Request (/index.php?ci_id=50630&amp;la_id=1)</a> <a href="#">Sample Request (/samplerequest)</a> <a href="#">Digital University Login (/index.php?ci_id=50607&amp;la_id=1)</a> <a href="#">Limitless Microsite (/index.php?ci_id=50631&amp;la_id=1)</a> <a href="#">Supplier Microsite (/index.php?ci_id=44887&amp;la_id=1)</a>	 <a href="#">Terms &amp; Conditions (/index.php?ci_id=2588&amp;la_id=1)</a> <a href="#">White Papers (/whitepapers)</a> <a href="#">Application Notes (/applicationnotes)</a> <a href="#">Application Demos (/index.php?ci_id=141383&amp;la_id=1)</a> <a href="#">CAD Renderings (/cadrenderings)</a>	<a href="#">Privacy Statement (/index.php?ci_id=2589&amp;la_id=1)</a> <a href="#">Site Map (/sitemap)</a> <a href="#">ci_id=142628&amp;la_id=1</a>