




Home > Products > MICRO SWITCH™ Toggle Switches > NT > Product Page

### Order Product and Get Support

- U.S. Authorized Distributors
- Global Sales & Service
- N. American Sales Reps
- Distributor Inventory
- Technical Assistance
- White Papers
- Literature Request
- Test and Measurement Catalog
- RoHS Product List
- Customer Feedback

## 31NT391-6-B08

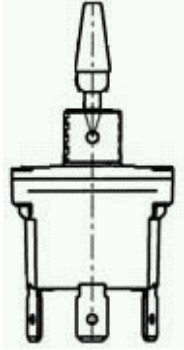

Actual product appearance may vary.

**NT Series Toggle Switch, 1 pole, 2 position, Quick Connect terminal, Tab Lever**

### Features

Completely sealed switching chamber  
NEMA 3, 3R, 4, and 13  
UL recognized, File E12252, Vol. 1, Section 44  
CSA certified, File LR4442  
CE approved

### Potential Applications

Aerial lifts, scissor lifts, truck mounted tele-handlers, and cranes  
Construction equipment  
Agriculture equipment  
Material-handling equipment  
Factory-floor control units  
Machine tool equipment manufacturers

### Description

MICRO SWITCH™ NT Series toggle switches meet the need for a rugged, cost effective toggle switch. Quality construction features include a seal between the toggle lever and bushing, and between the cover and case. These switches can be used where panels are subject to splashes, hosedowns, or outdoor environments. The "Easy-Start" threaded bushing enables quick alignment of mounting nut to decrease the chance of cross threading. The panel stand-off with O-ring feature available on some listings, eliminates the need for behind-the-panel hardware, provides uniform panel height, and provides a panel to cover seal.

### Supporting Documentation

[Accessory: Seals](#)

[Accessory: Nuts](#)

[Engineering Drawing](#)

Product Specifications							
Circuitry/Operating action	<table border="0"> <tr> <td style="text-align: center;"><b>Keyway Momentary Position</b></td> <td style="text-align: center;"><b>Opposite Keyway Position</b></td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> <tr> <td style="text-align: center;"><b>ON</b></td> <td style="text-align: center;"><b>OFF</b></td> </tr> </table>	<b>Keyway Momentary Position</b>	<b>Opposite Keyway Position</b>			<b>ON</b>	<b>OFF</b>
<b>Keyway Momentary Position</b>	<b>Opposite Keyway Position</b>						
<b>ON</b>	<b>OFF</b>						
Product Type	MICRO SWITCH™ Toggle Switch						
Ampere/Voltage Range (Resistive Load)	0.5 A at 250 Vdc, 0.75 A at 115 Vdc, 0.5 A to 10 A at 0.5 Vac to 7 Vac, 0.5 A to 15 A at 0.5 Vdc to 28 Vdc						
Circuitry	SPST						
Action	2 position						
Mounting	Bushing 15/32 in						
Termination	Quick Connect						
Lever Type	Tab						
UL/CSA Rating Code	L192: 10 A - 125, 250, 277 Vac; 1/4 Hp - 125 Vac; 1/2 Hp - 250, 277 Vac; 3 A - 125 Vac "L"						
Comment	Yellow						
Availability	Global						
UNSPSC Code	30211908						
UNSPSC Commodity	30211908 Toggle switches						
Series Name	NT						

### My Links

[Login to iCOM](#)  
[Login as Rep/AD](#)  
[Login as Guest](#)  
[Login to Digital University](#)

### Keyword Search

Search for product and support information.

All Sensing and Control

### Product Search

Part number search:

Use (\*) to expand search

[Specification Search](#)