

Fuse modular terminal block - PT 4-HESILED 24 (5X20) - 3211903

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Lever-type fuse terminal block, black, for 5 x 20 mm G fuse inserts, with LED for 24 V DC

Product Features

- ✓ The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- ✓ The compact design and front connection enable wiring in a confined space
- ✓ In addition to the testing facility in the double function shaft, all terminal blocks provide an additional test connection
- ✓ Tested for railway applications



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Minimum order quantity | 50 pc |
| Weight per Piece (excluding packing) | 13.6 g |
| Custom tariff number | 85369085 |
| Country of origin | Poland |

Technical data

General

| | |
|--|---|
| Note | The current is determined by the fuse used, the voltage by the selected LED. If the fuse is faulty, the downstream circuit will not be disconnected. |
| Number of levels | 1 |
| Number of connections | 2 |
| Nominal cross section | 4 mm ² |
| Color | black |
| Insulating material | PA |
| Flammability rating according to UL 94 | V0 |
| Area of application | Railway industry |

Fuse modular terminal block - PT 4-HESILED 24 (5X20) - 3211903

Technical data

General

| | |
|----------------------------------|--|
| | Mechanical engineering |
| | Plant engineering |
| Fuse | G / 5 x 20 |
| Fuse type | Glass |
| Rated surge voltage | 4 kV |
| Pollution degree | 3 |
| Overvoltage category | III |
| Insulating material group | I |
| Maximum power dissipation | max. 1.6 W (With single arrangement of the fuse terminal block in the event of overload) |
| LED voltage range | 12 V AC/DC ... 30 V AC/DC |
| LED current range | 0.31 mA ... 0.95 mA |
| Connection in acc. with standard | IEC 60947-7-3 |
| Maximum load current | 6.3 A (the current is determined by the fuse used) |
| Nominal current I_N | 6.3 A |
| Nominal voltage U_N | 24 V |
| Open side panel | ja |

Dimensions

| | |
|------------------|---------|
| Width | 6.2 mm |
| Length | 56 mm |
| Height NS 35/7,5 | 62.5 mm |
| Height NS 35/15 | 70 mm |

Connection data

| | |
|---|----------------------|
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 6 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 4 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 10 |
| Conductor cross section flexible, with ferrule without plastic sleeve min. | 0.25 mm ² |
| Conductor cross section flexible, with ferrule without plastic sleeve max. | 4 mm ² |
| Conductor cross section flexible, with ferrule with plastic sleeve min. | 0.25 mm ² |
| Conductor cross section flexible, with ferrule with plastic sleeve max. | 4 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 1 mm ² |

Fuse modular terminal block - PT 4-HESILED 24 (5X20) - 3211903

Technical data

Connection data

| | |
|---------------------------|--------------------|
| Connection method | Push-in connection |
| Minimum stripping length | 10 mm |
| Maximum stripping length | 12 mm |
| Internal cylindrical gage | A4 |

Standards and Regulations

| | |
|--|---------------|
| Connection in acc. with standard | CSA |
| | IEC 60947-7-3 |
| Flammability rating according to UL 94 | V0 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27141116 |
| eCl@ss 4.1 | 27141116 |
| eCl@ss 5.0 | 27141116 |
| eCl@ss 5.1 | 27141116 |
| eCl@ss 6.0 | 27141116 |
| eCl@ss 7.0 | 27141116 |
| eCl@ss 8.0 | 27141116 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000897 |
| ETIM 3.0 | EC000899 |
| ETIM 4.0 | EC000899 |
| ETIM 5.0 | EC000899 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39121410 |

Approvals

Approvals

Fuse modular terminal block - PT 4-HESILED 24 (5X20) - 3211903

Approvals

Approvals

UL Recognized / cUL Recognized / GL / CSA / LR / NK / NK / BV / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

| | | |
|--------------------------------|-------|-------|
| UL Recognized | | |
| | B | C |
| mm ² /AWG/kcmil | 24-10 | 24-10 |
| Nominal current I _N | 6.3 A | 6.3 A |
| Nominal voltage U _N | 30 V | 30 V |

| | | |
|--------------------------------|-------|-------|
| cUL Recognized | | |
| | B | C |
| mm ² /AWG/kcmil | 24-10 | 24-10 |
| Nominal current I _N | 6.3 A | 6.3 A |
| Nominal voltage U _N | 30 V | 30 V |

| |
|----|
| GL |
|----|

| | | |
|--------------------------------|-------|-------|
| CSA | | |
| | B | C |
| mm ² /AWG/kcmil | 24-10 | 24-10 |
| Nominal current I _N | 6.3 A | 6.3 A |
| Nominal voltage U _N | 30 V | 30 V |

| |
|----|
| LR |
|----|

Fuse modular terminal block - PT 4-HESILED 24 (5X20) - 3211903


Approvals

NK

NK


BV

EAC


cULus Recognized 

Drawings

Circuit diagram




Application drawing

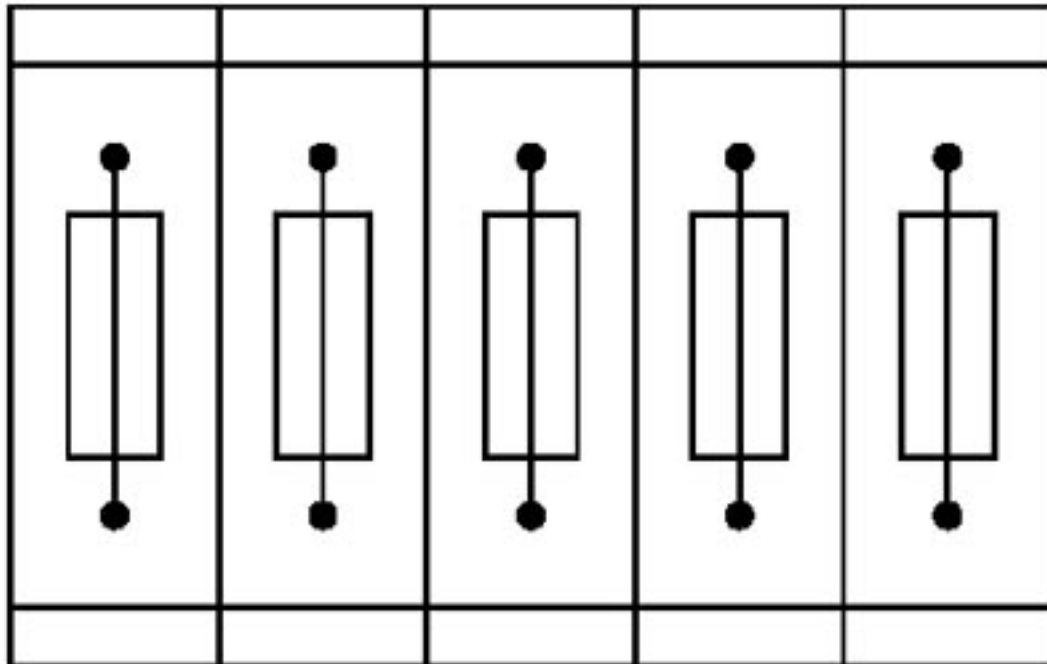

Fuse terminal blocks in interconnected arrangement, block consisting of 5 fuse terminal blocks

Fuse modular terminal block - PT 4-HESILED 24 (5X20) - 3211903

Application drawing

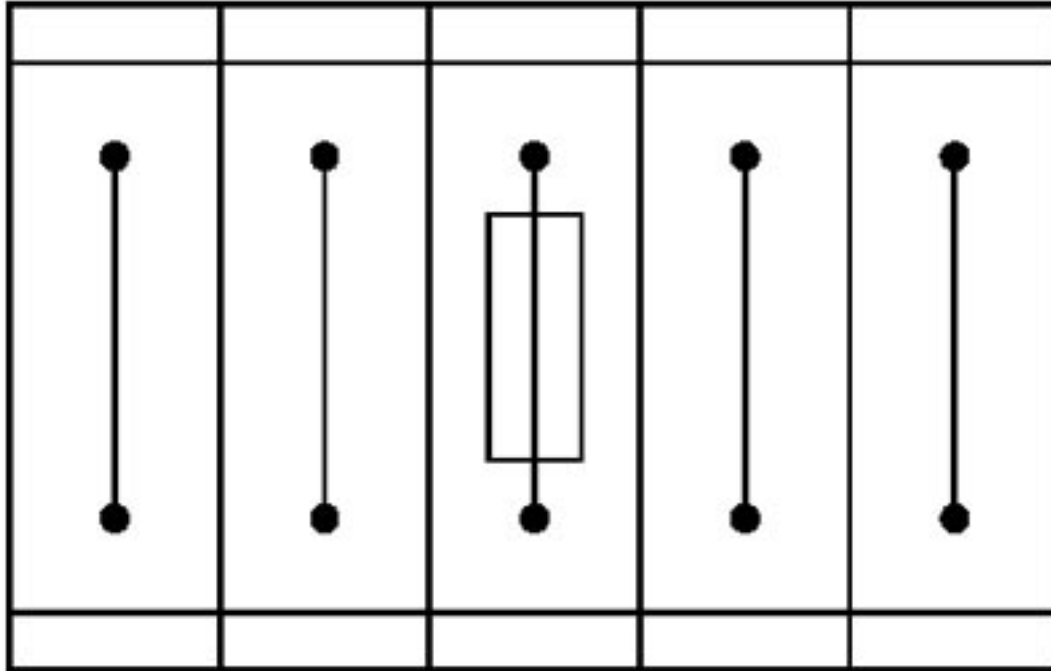

Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks