


# Terminal blocks - strip type

## SERIES 323 10A terminal blocks - standard & raised base

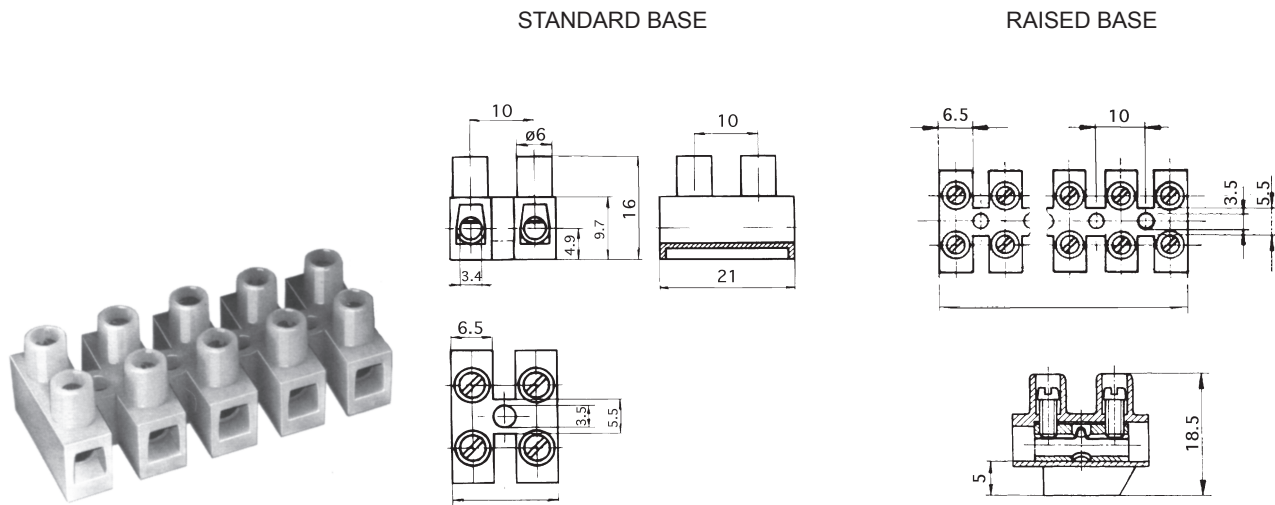

Length = number of poles x 10 less 2mm

### FEATURES

Series 323 terminal blocks are available in standard height profile, suffixed WE (HDS) and in raised base profile, suffixed FU (HDS). The raised base versions are particularly suitable to obtain required minimum creepage and clearance distances when mounting on non-insulating surfaces. They are available with or without wire protectors, with captive screws fitted as standard.

Approvals				
Nominal Cross-Section mm <sup>2</sup>	20-10 AWG 30A	26-10 AWG 25A	26-10 AWG 10A	2.5
Voltage Rating V	300	300	300	400
Application Group	B, D	B	D, E	

### TECHNICAL DETAILS

<b>Mouldings:</b>	nylon 6.6, natural, UL94 V2
<b>Inserts:</b>	brass, tinned
<b>Screws:</b>	M3 steel, zinc plated, blue passivated
<b>Screw tightening torque:</b>	max: 0.51 Nm
<b>Temp. limits:</b>	max short term: 140° C continuous: 105° C
<b>Current rating:</b>	26A
<b>Voltage rating:</b>	400v to VDE 0110 pollution group 2
<b>Conductor size:</b>	2.5mm <sup>2</sup>
<b>Wire stripping length:</b>	6.5mm

### OPTIONS

- Marking:** special printing available. Please provide sketch.
- Cut lengths:** standard 12 pole lengths can be cut to shorter lengths.
- Covers & base plates:** see page 58.

