

Cable duct - CD 60X80 - 3240199

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable duct, gray, consisting of upper and lower part, width: 60 mm, height: 80 mm, length 2000 mm

Product Features

- Easy, burr-free cutting with minimum effort using the CUTFOX-CD cable duct cutter
- Thanks to its leverage and special cutting geometry, the PPS CD cable duct cutter enables easy, burr-free cutting with minimum effort
- Predetermined breaking point enables tool-free, burr-free removal of bars
- The wide, diagonal heads of the cable duct bars make it easy to fit the cover and hold it securely in place
- Installed conductors are securely held in place by means of wire retaining clips that can be snapped onto bars on the side
- Plastic body-bound rivets enable easy fixing of cable ducts using the rivet setting tool



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Minimum order quantity | 10 pc |
| Weight per Piece (excluding packing) | 1382.0 g |
| Custom tariff number | 39259020 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|------------|---------|
| Length (b) | 2000 mm |
| Width (a) | 60 mm |
| Height | 80 mm |

Ambient conditions

| | |
|---------------------------------|-----------------|
| Ambient temperature (operation) | -5 °C ... 60 °C |
|---------------------------------|-----------------|

General

| | |
|-------|------|
| Color | gray |
|-------|------|

Cable duct - CD 60X80 - 3240199

Technical data

General

| | |
|--|-----------|
| Components | Lead-free |
| Flammability rating according to UL 94 | V0 |
| Material | PVC |

Standards and Regulations

| | |
|--|-----|
| Halogen-free | no |
| Connection in acc. with standard | CSA |
| Flammability rating according to UL 94 | V0 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140602 |
| eCl@ss 4.1 | 27140602 |
| eCl@ss 5.0 | 27140602 |
| eCl@ss 5.1 | 27140602 |
| eCl@ss 6.0 | 27400703 |
| eCl@ss 7.0 | 27400703 |
| eCl@ss 8.0 | 27400703 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000012 |
| ETIM 3.0 | EC000012 |
| ETIM 4.0 | EC000012 |
| ETIM 5.0 | EC000012 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30101815 |
| UNSPSC 7.0901 | 30101815 |
| UNSPSC 11 | 30101815 |
| UNSPSC 12.01 | 30101815 |
| UNSPSC 13.2 | 30101815 |

Approvals

Approvals

Cable duct - CD 60X80 - 3240199

Approvals

Approvals


CSA / UL Recognized / VDE Zeichengenehmigung


Ex Approvals

Approvals submitted

Approval details


CSA 

UL Recognized 

VDE Zeichengenehmigung 

Drawings

Dimensional drawing

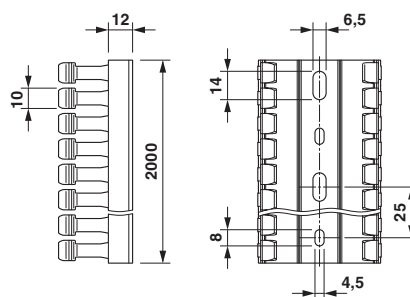

Base perforation according to DIN EN 50085
