



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-	F		ECR-05-005975	30-JUN-05	BM	JB
		G		ECR-10-019054	15SEP10	DP	MQW

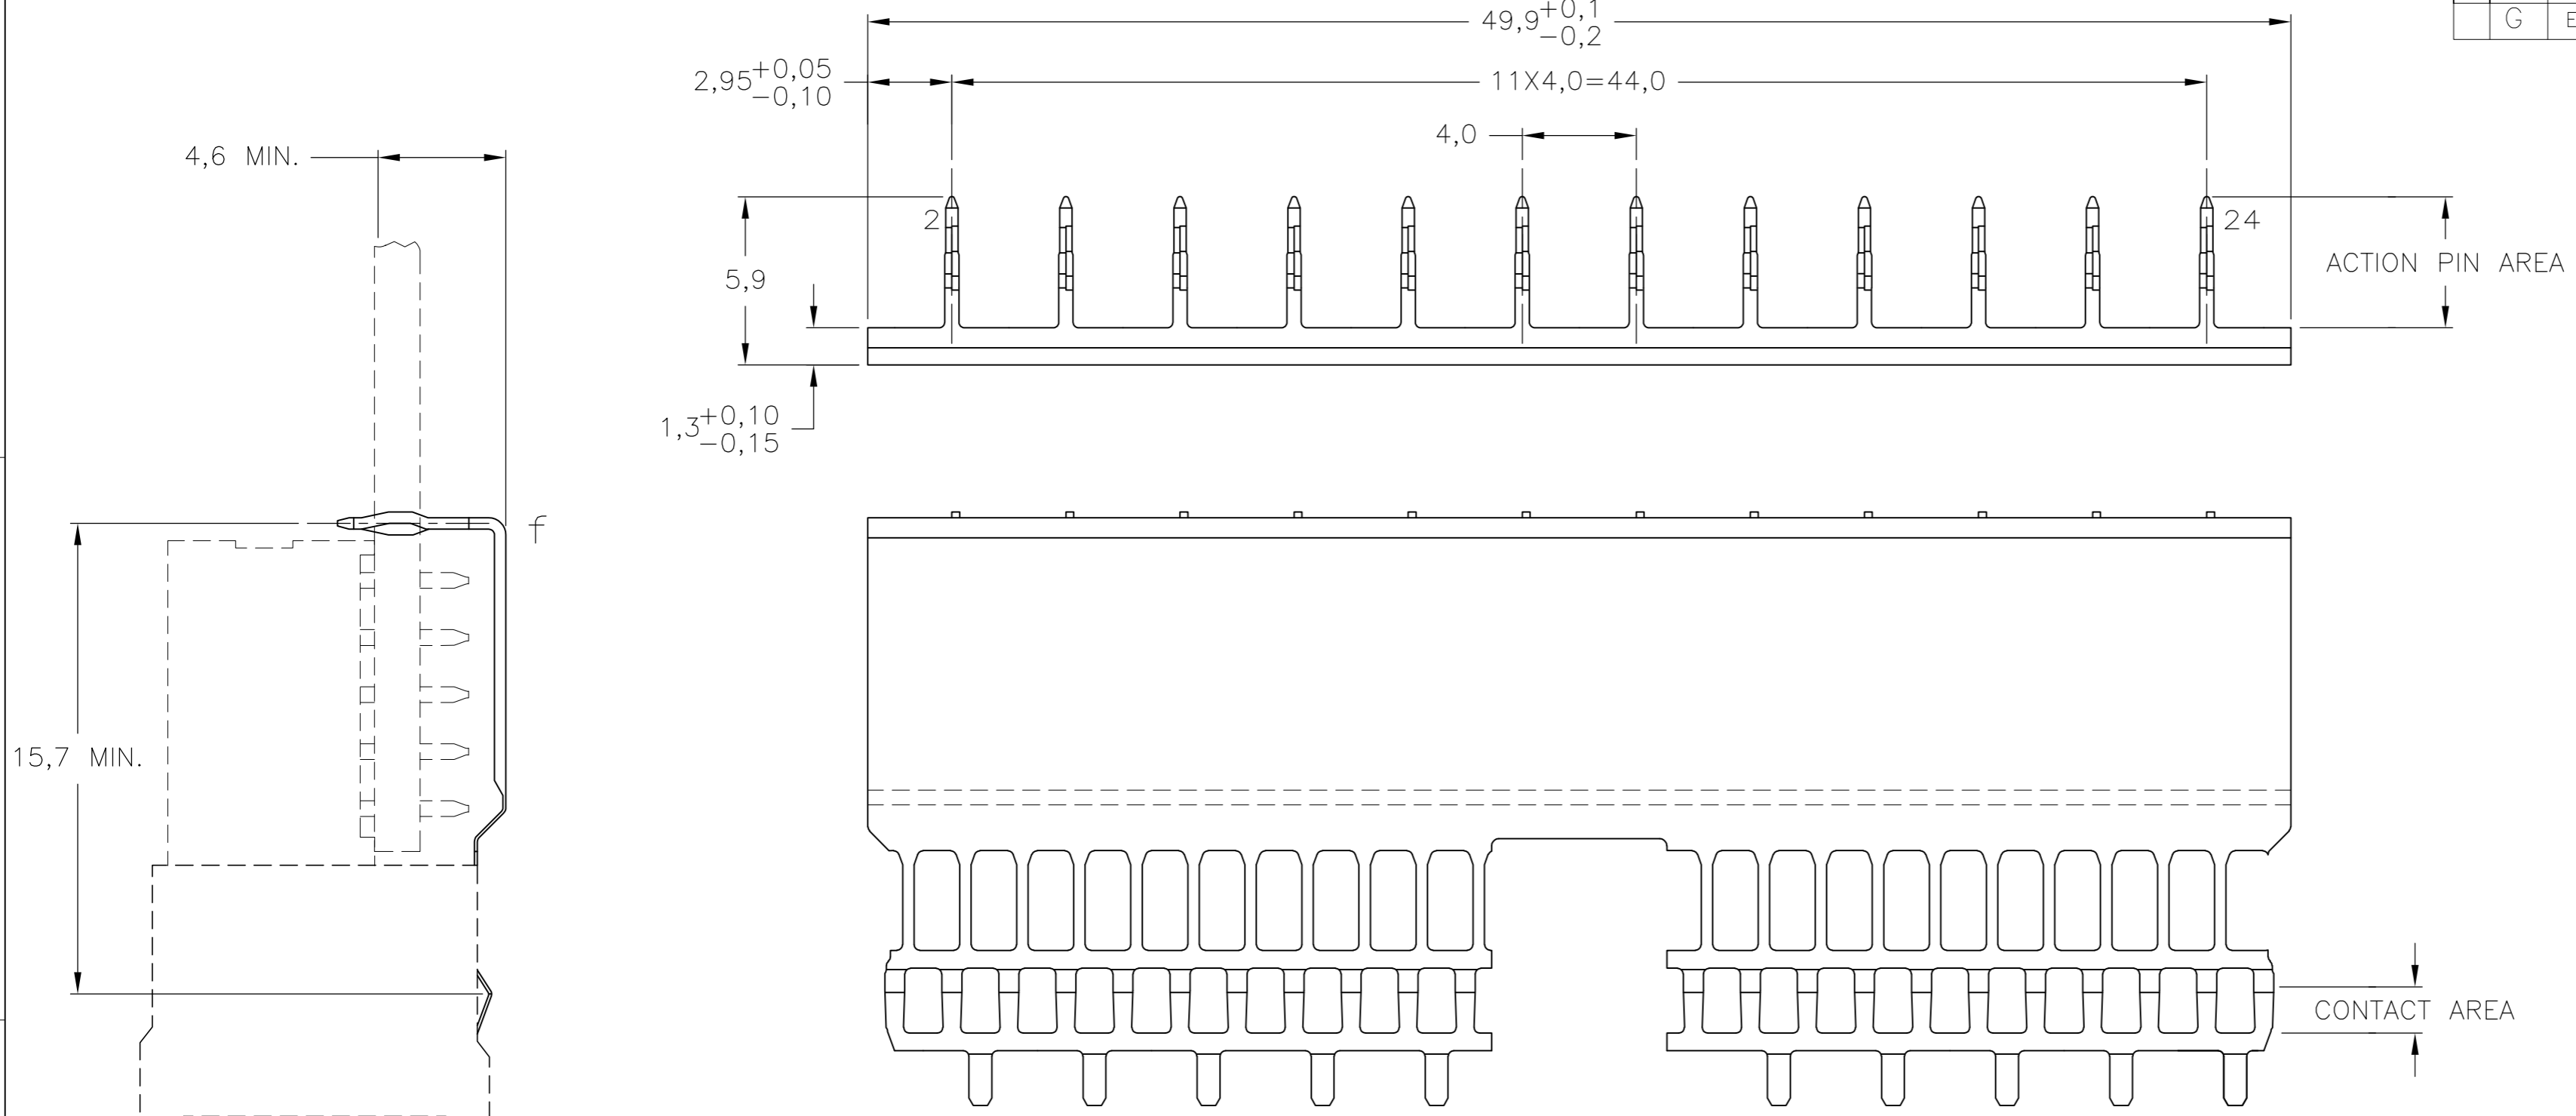

- NOTES:**
- ⚠ PLATING:  
 CONTACT AREA: 0,76µm Au MIN. OVER 1,27µm Ni MIN.  
 ACTION PIN : 0,5µm SnPb MIN.  
 REMAINDER : Ni
  - ⚠ MATERIAL; PHOSPHORBRONZE.
  - ⚠ ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
  - ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A WITH  
 UPPERSHIELD, 110+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
  - 5 MAX. BOARD THICKNESS 3,5 mm.
  - ⚠ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
- TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.

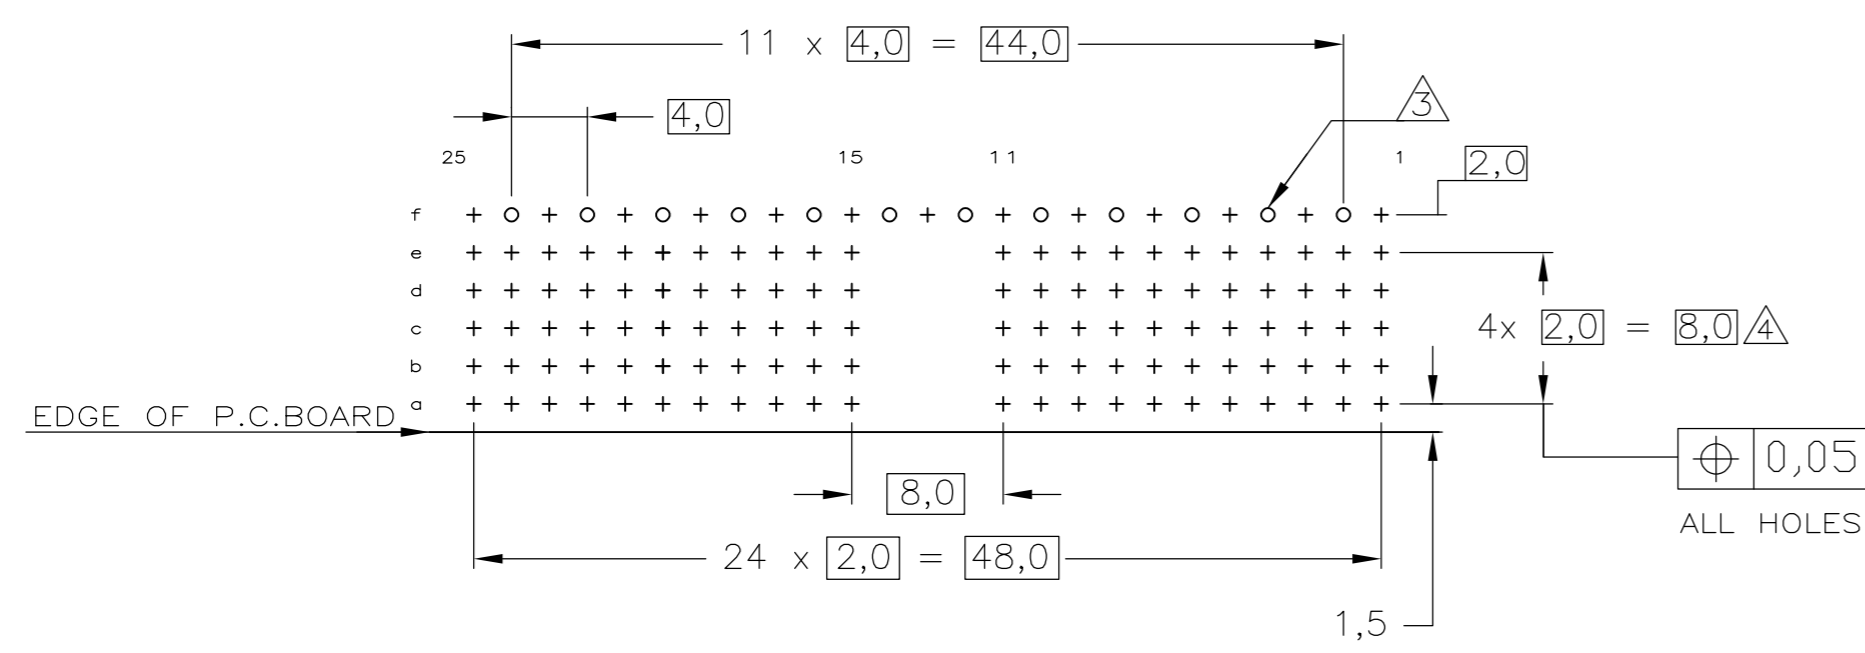

P.C.B. HOLE DIM. ACTION PIN  
 FOR DETAILS SEE  
 APPLICATION SPECIFICATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN 27-11-96	Tyco Electronics Corporation 's-Hertogenbosch, 5222AR-32	
DIMENSIONS: mm		CHK W. v.d.HEIJDEN 27-11-96	NAME Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE A	
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2		APVD F. v.KONINGSBRUGGE	PRODUCT SPEC 108-19082	SIZE A2
MATERIAL -		FINISH -	APPLICATION SPEC 114-19029	CAGE CODE 00779
			WEIGHT -	DRAWING NO C=338108
			CUSTOMER DRAWING	RESTRICTED TO -
			SCALE 5:1	SHEET 1 OF 1
				REV G