
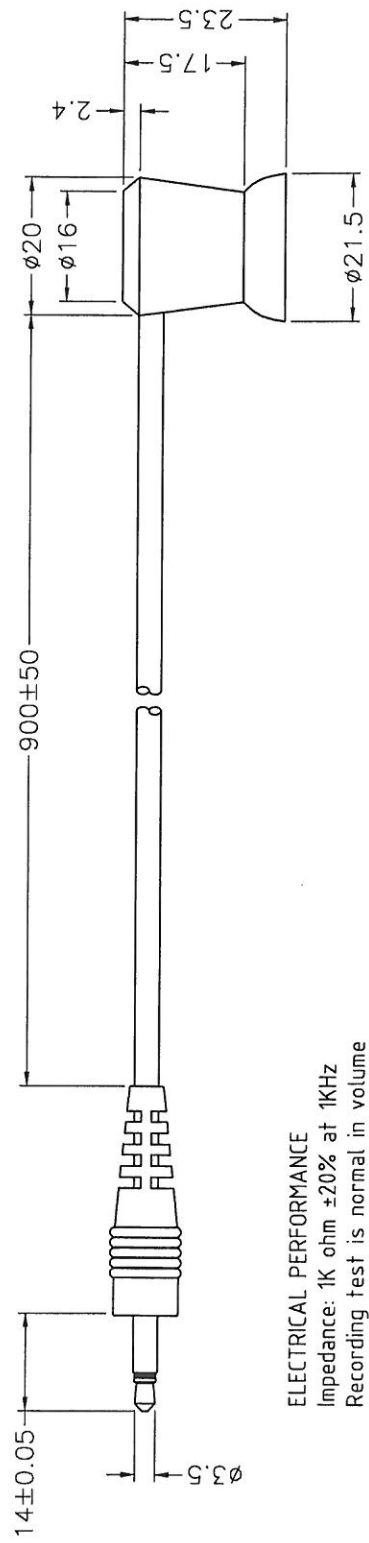


| | | | | | | |
|----------|-----|----------|--------|-----------------|-----------------|-----------------|
| CUSTOMER | MCM | FILE NO. | 36-010 | DESCRIPTION | DRAWN / DATE | APPROVED / DATE |
| | | | | INITIAL RELEASE | FROS 08/30/2013 | FROS 08/30/2013 |

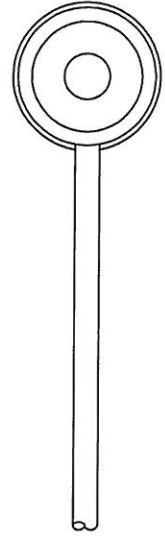

ELECTRICAL PERFORMANCE

Impedance: 1K ohm ±20% at 1KHz
Recording test is normal in volume

MECHANICAL PERFORMANCE

1. Act 2kgs tension between cord and body or cord and plug for 15 seconds. Any defect cannot be found in function and appearance.
2. The stretch strength of cord can stand 5kgs or more.
3. The suction power of section cup is 1kgs or more



| | | | | | | |
|---------------|----------------|---------------------------|--|------|--|---|
| 11 | COIL | UEW0.06X2300T | | | | |
| 10 | TERMINAL BOARD | 12T | | | | 1 |
| 9 | POLE PIECE | 5*13.8, STEEL | | | | 1 |
| 8 | SHAFT | ABS | | | | 1 |
| 7 | SUCTION CUP | PVC, BLACK | | | | 1 |
| 6 | COVER | ABS, BLACK | | | | 1 |
| 5 | CABLE TIE | BLACK | | | | 1 |
| 4 | CABLE JACKET | PVC BLACK | | | | 1 |
| 3 | CABLE | φ2.4 10x32/0.12, SHIELDED | | | | 1 |
| 2 | OVERMOLD | PVC BLACK | | | | 1 |
| 1 | PIN | φ3.5mm MONO, NI-PLATED | | | | 1 |
| NO. PART NAME | | DESCRIPTION | | Q'TY | | |

| | | | | | | | | |
|-----------------------|--|----------|-------------------|--------|-------|------|-------|------------|
| DIMENSIONS ARE IN mm. | TOLERANCES ARE FRACTIONS DECIMALS ANGLES | MATERIAL | P/N | 36-010 | DRAWN | FROS | DATE | 08/30/2013 |
| MOLD NO. | ± 0.5 | FINISH | PROJECT NO. | | | | | |
| 36-010 | | COLOR | SCALE | N/A | SIZE | A4 | SHEET | 1 OF 1 |
| | | | TELEPHONE PICK-UP | | | | | MF005 |