



## Type 360272

Single terminal block, solderable, horizontal wire entry, open construction, double solder pins, screw brought down by hand

### Technical Data

**RIA** A / AWG 15 / 26 - 14

Insulation co-ordination according to IEC 664-1

Protection category according to IEC 529

IP00

Tightening torque UL 3.5 lb-in max.

Solder pin dimension 2 x 1.0 mm

Recommended pc board hole dia. Ø 1.5 mm

Solder pin length 3.5 mm

## Type 360273

Single terminal block, solderable, horizontal wire entry, wire protector, open construction, double solder pins, screw brought down by hand

### Technical Data

**RIA** A / AWG 15 / 26 - 14

Insulation co-ordination according to IEC 664-1

Tightening torque UL 3.5 lb-in max.

Solder pin dimension 2 x 1.0 mm

Recommended pc board hole dia. Ø 1.5 mm



Solder pin length 3.5 mm

Dimensions in mm

1 mm = 0.0394 in.

Dimensions in mm

1 mm = 0.0394 in.




### Part numbers (P/N)

Type 360272  
P/N 360272

### Part numbers (P/N)

Type 360273  
P/N 360273

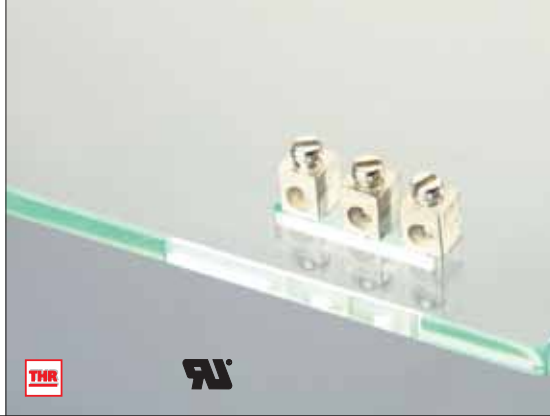

## Type 360410

Single terminal block, solderable, horizontal wire entry, open construction, double solder pins, screw brought down by hand

### Technical Data

A / AWG	15 / 30 - 18
Insulation co-ordination according to IEC 664-1	
Protection category according to IEC 529	
	IP00
Tightening torque UL	4.4 lb-in max.
Solder pin dimension	2 x 1.0 mm
Recommended pc board hole dia.	Ø 1.5 mm
Solder pin length	3.5 mm

## Type 360322


Single terminal block, solderable, horizontal wire entry, wire protector, open construction, double solder pins, screw brought down by hand

### Technical Data

A / AWG	15 / 30 - 16
A / AWG	15 / 30 - 16
Insulation co-ordination according to IEC 664-1	
Protection category according to IEC 529	
	IP00
Tightening torque UL	6 lb-in max.
Solder pin dimension	2 x 1.0 mm
Recommended pc board hole dia.	Ø 1.5 mm
Solder pin length	3.5 mm


Dimensions in mm

1 mm = 0.0394 in.



Dimensions in mm

1 mm = 0.0394 in.



### Part numbers (P/N)

Type 360410  
P/N 360410

### Part numbers (P/N)

Type 360322  
P/N 360322



## Type 360381

Single terminal block, solderable, horizontal wire entry, open construction, double solder pins, screw brought down by hand

### Technical Data

0.5 - 2.5 mm<sup>2</sup> 16 A

Insulation co-ordination according to IEC 664-1

Protection category according to IEC 529

IP00

Tightening torque UL 4.4 lb-in max.


Solder pin dimension 2 x 1.0 mm

Recommended pc board hole dia. Ø 1.5 mm

Solder pin length 2.25 mm

Dimensions in mm

1 mm = 0.0394 in.



### Part numbers (P/N)

Type 360381

P/N 360381