

3600 Series/Low Thermal EMF Reed Relays




Low Thermal EMF Reed Relays

The 3600 Series is ideally suited to the needs of Instrumentation, Data Acquisition, and Process Control. The specification tables allow you to select the appropriate relay for your particular application. Recommended for use in Scanners, Multiplexers and Digital or Analog Multipoint Recorders. If your requirements differ from the selection options, please consult Coto's Factory to discuss a custom reed relay.

3600 Series Features

- ◆ Low Thermal EMF: $< 5 \mu\text{V}$ through $< 0.5 \mu\text{V}$ with 50 nV stability
- ◆ Patented Low Thermal Design. U.S. Patent #4,084,142
- ◆ Low power coils to ensure low thermal EMF
- ◆ High Insulation Resistance - $10^{12} \Omega$
- ◆ Control/Signal isolation of 1500 VDC
- ◆ High speed switching compared to electromechanical relays
- ◆ High reliability, hermetically sealed contacts
- ◆ Various Form A contacts. High Dielectric Strength
- ◆ Epoxy coated steel shell provides magnetic shielding
- ◆ Electrostatic shield for reducing capacitive coupling

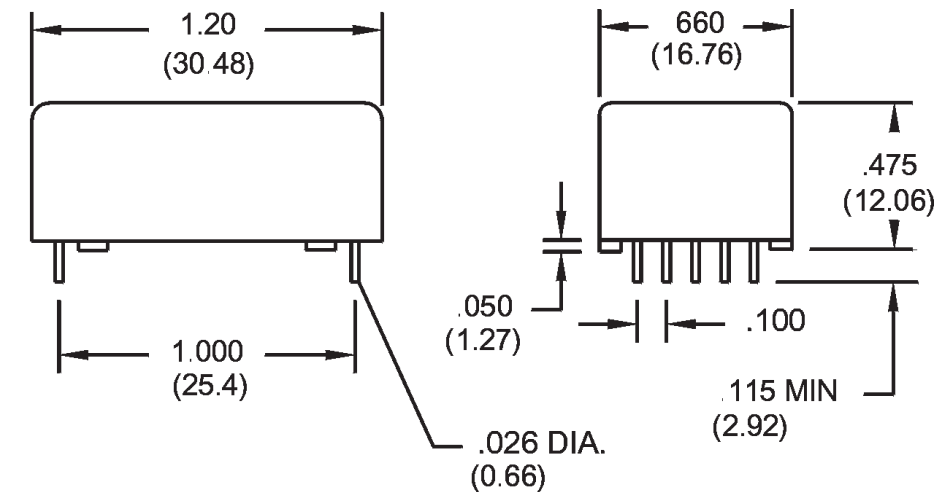

Bottom View

Dimensions in Inches (Millimeters)

Ordering Information

Part Number	XXXX-XX-X2		Thermal EMF Rating
Model Number	3602	3650 3660	See available ratings in specification table.
Coil Voltage	05=5 volts	12=12 volts	9= $< 5 \mu\text{V}$ 8= $< 3 \mu\text{V}$ 7= $< 1 \mu\text{V}$ 5= $< 0.5 \mu\text{V}$

3600 Series/Low Thermal EMF Reed Relays

Model Number

Parameters

THERMAL EMF OPTIONS

COIL SPECS.

Nom. Coil Voltage

Coil Resistance

Operate Voltage

Release Voltage

CONTACT RATINGS

Switching Voltage

Switching Current

Carry Current

Contact Rating

Life Expectancy-Typical¹

Static Contact Resistance

(max. init.)

Dynamic Contact Resistance

(max. init.)

RELAY SPECIFICATIONS

Insulation Resistance

(minimum)

Capacitance - Typical

Across Open Contacts

Contact to Shield

Dielectric Strength

(minimum)

Operate Time - including

bounce - Typical

Release Time - Typical

Test Conditions

Measured after 5 minutes
at nominal coil voltage
Refer to Reed Relay
Technical Section for Details

Max DC/Peak AC Resist.
Max DC/Peak AC Resist.
Max DC/Peak AC Resist.
Max DC/Peak AC Resist.
Signal Level 1.0V, 1mA

50mV, 10mA

0.5V, 50mA
at 100 Hz, 1.5 msec

Between all Isolated Pins
at 100V, 25°C, 40% RH

Shield Floating
Shield Guarding
Contacts Open
Shield & Coil Tied Common

Between Contacts
Contacts to Shield
Contacts/Shield to Coil

At Nominal Coil Voltage,
30 Hz Square Wave

Zener-Diode Suppression³

Units

μV

VDC

Ω

VDC - Max.

VDC - Min.

Volts

Amps

Amps

Watts

x 10⁶ Ops.

Ω

Ω

Ω

pF

pF

pF

pF

VDC/peak AC

VDC/peak AC

VDC/peak AC

msec.

msec.

3602

2 Form A

Differential
<5μV
<3μV
<1μV
<0.5μV

5 12
350 2000

3.8 9.0

0.4 1.0

150

0.25

1.5

5

500

0.100

0.200

10¹²

1.2

0.2

2.5

2.5

250

1000

1500

0.75

0.1

3650⁴

3 Form A

Differential
<5μV
<3μV
<1μV
<0.5μV

5 12
350 2000

3.8 9.0

0.4 1.0

150

0.25

1.5

5

500

0.100

0.200

10¹²

1.2

0.2

2.5

2.5

250

1000

1500

0.75

0.1

3660²

3 Form A

Differential
<5μV
<3μV
<1μV
<0.5μV

5 12
350 2000

3.8 9.0

0.4 1.0

150

0.25

1.5

5

500

0.100

0.200

10¹²

1.2

0.2

2.5

2.5

250


1000

1500

0.75

0.1

Top View:
Dot stamped on top of relay refers to pin #1 location
Grid = .1"x.1" (2.54mm x 2.54mm)

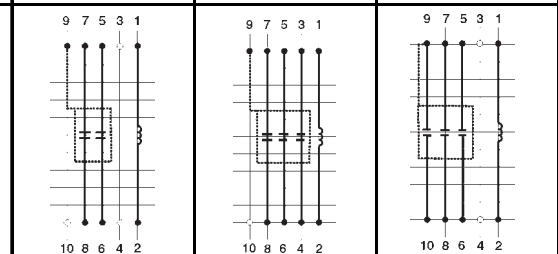

Notes:

¹Consult factory for life expectancy at other switching loads.

²Model 3660: Reed switch between pins #9 & #10 is not low thermal and is tied in common with the electrostatic shield.

³Consists of 20V Zener-diode and 1N4002 diode in series, connected in parallel with coil.

⁴Model 3650: Reed switch between pins #3 & #4 is not low thermal and is not tied in common with the electrostatic shield. Pin numbers for reference only.

Environmental Ratings:

Storage Temp: -35°C to +100°C;

Operating Temp: -20°C to +85°C

Solder Temp: 270°C max; 10 sec. max

The operate and release voltage and the coil resistance are specified at 25°C.

These values vary by approximately 0.4%/°C as the ambient temperature varies.

Vibration: 20 G's to 2000 Hz; Shock: 50 G's