
THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

| REVISION | | | | | | |
|----------|-------------|------|----------|--|--|--|
| REV. | DESCRIPTION | DATE | APPROVED | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

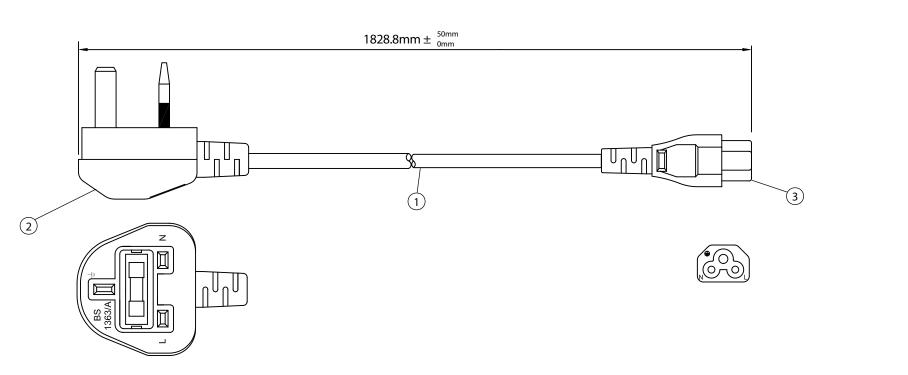

NOTES:

- 1. CORDAGE: H03VV-F, 3x0.75mm,² UNSHIELDED CEE COLOR CODE, TEMP. RATING: 70°C, RATING: 250V 2.5A, JACKET COLOR: BLACK
- 2. PLUG: BS1363A W/3A FUSE
- 3. CONNECTOR: IEC 60320 C5
- 4. APPROVALS: BSI
- 5. ROHS COMPLIANT

CONTROLLED

| Dim range | Tolerance +/- (mm) | Qualtek Electronics Corp. PPC DIVISION | | |
|--------------|--------------------------|---|----------------|-------------------|
| (mm) | | Part Number: | 370021-01 | RoHS Compliant |
| 0-1 | 0.15 | Description: POWER CORD | | |
| 1-6 | 0.20 | | | |
| 6-18 | 0.30 | | | |
| 18-50 | 0.50 | RFQ# 2677D | UNIT: mm | |
| 50-120 | 0.70 | Drawn / Date | Checked / Date | Approved / Date |
| 120-250 | 0.90 | R.Nuti | 08-15-13 | LY / 08-15-13 |
| 250-500 | 1.20 | 08-15-13 | 00-15-15 | ET / 00 15 15 |