


CATALOG LISTING	
3HM41	
PAGE 1 OF 1	
REPLACES -	
RELEASE NO. PR-11613	

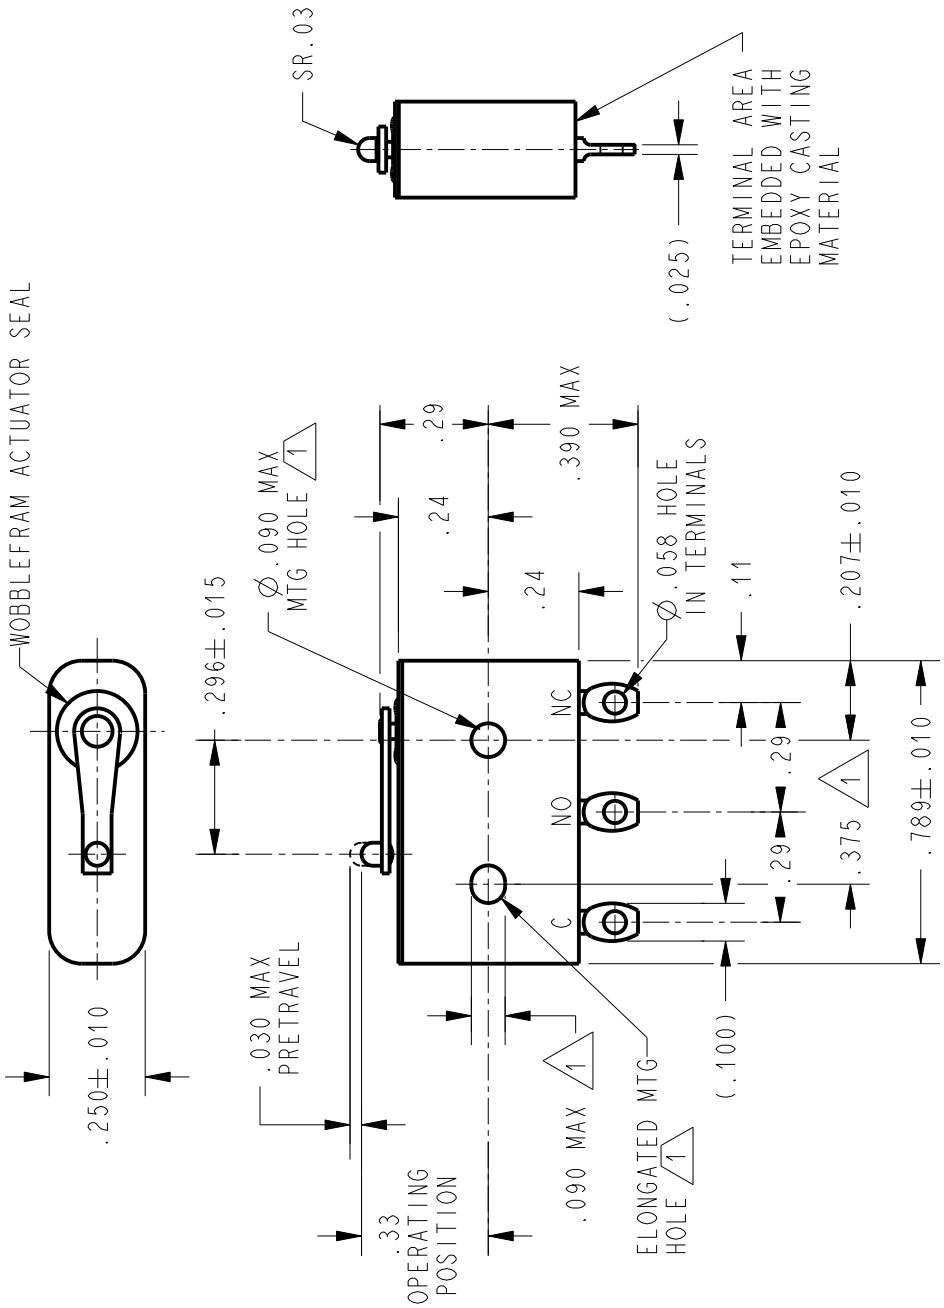

NOTES

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .375±.002 CENTERS
- 2 - FOR USE IN TEMPERATURE RANGE -300°F TO +250°F
- 3 - HERMETICALLY SEALED (METAL-TO-METAL, GLASS-TO-METAL)
- 4 - ALL EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIALS
- 5 - TERMINALS ARE TINNED FOR SOLDERING
- 6 - DO NOT APPLY MORE THAN 1 1/2 INCH-LBS OF TORQUE WHEN TIGHTENING MOUNTING SCREWS
- 7 - 24K GOLD MOVABLE CONTACT
- 8 - GOLD ALLOY STATIONARY CONTACTS

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

<p>CHARACTERISTICS</p> <p>OPERATING FORCE ----- 7 OZ MAX</p> <p>RELEASE FORCE ----- 1 OZ MIN</p> <p>DIFFERENTIAL TRAVEL ----- .004 MAX</p> <p>OVERTRAVEL ----- .003 MIN</p>	<p>ELECTRICAL DATA</p> <p>CONTACT ARRANGEMENT</p> <p>S P D T</p> <p>ELECTRICAL RATING, LIFE, SHOCK, AND VIBRATION NOT ESTABLISHED</p>	<p>SCALE 2 : 1</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</p> <p>ONE PLACE (.0) ±.030</p> <p>TWO PLACE (.00) ±.015</p> <p>THREE PLACE (.000) ±.005</p> <p>ANGLES</p> <p>†</p>	<p>THIRD ANGLE PROJECTION</p>
			<p>DO NOT SCALE PRINT</p> <p>WEIGHT .014 LB MAX</p>

ISSUE
7

REVISIONS
A 0002091
C S L
13 NOV 03

CHECK	
CHECK	
CHECK	
CHECK	
CHECK	
CHECK	
CHECK	
CHECK	
CHECK	
CHECK	
CHECK	
CHECK	

CHECK	13 NOV 03
CHECK	13 NOV 03
CHECK	S A V
CHECK	
CHECK	
CHECK	
CHECK	
CHECK	
CHECK	
CHECK	
CHECK	
CHECK	