

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PHOENIX, ARIZONA
FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

3HS61

3HS61

PAGE 1 OF 1

M

DRAWING NUMBER

9

ISSUE

8

(M) 3HS61
ISSUE 3

REPLACES


RELEASE NO.

CHECK

CHECK

CHECK

CHECK

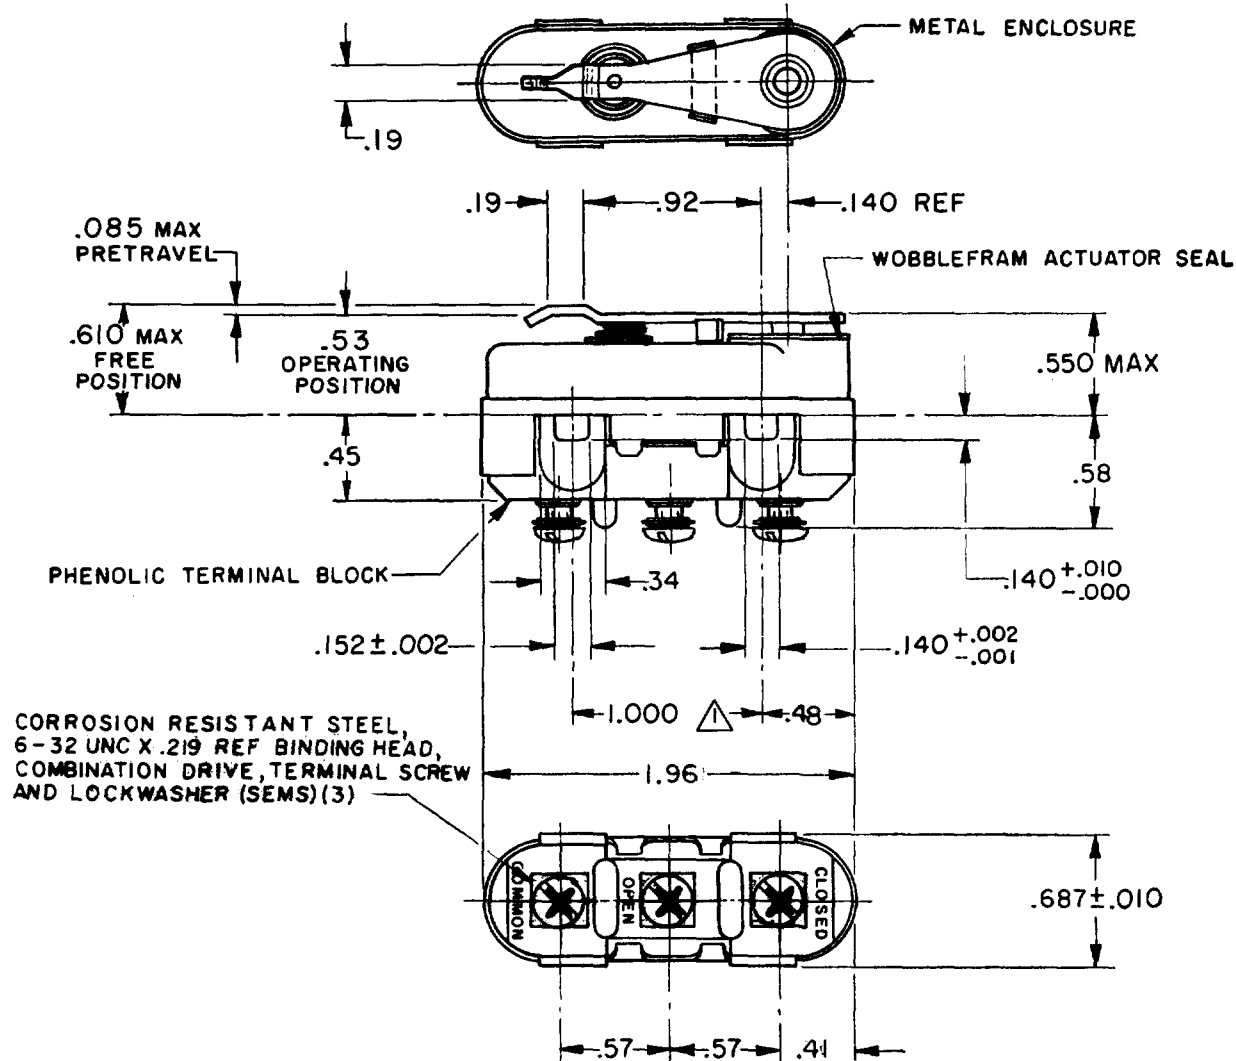

NOTE -

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - TRAVEL CHARACTERISTICS ARE REFERENCED FROM THE UPPER SURFACE OF THE MOUNTING HOLES WITH THIS CONSTRUCTION
- 3 - FOR USE IN AMBIENT TEMPERATURE RANGE FROM MINUS 65° F TO PLUS 250° F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA				SCALE FULL
OPERATING FORCE ----- 28-56 OZ	CONTACT ARRANGEMENT S P D T				DO NOT SCALE PRINT
RELEASE FORCE ----- 8 OZ MIN	LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD	MOTOR LOAD	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.018 THREE PLACE (.000) ±.005 ANGLES ±
DIFFERENTIAL TRAVEL ----- .020 MAX					
OVERTRAVEL ----- .010 MIN	125 VAC	1 AMP	.5 AMP		
	(SEA LEVEL - 100,000 FT)				
	(SEA LEVEL - 70,000 FT)				

FO-50378
FORMTEK

DRAWN
LMH 24 APR 61
CHECK
DAV 6 MAY 61
CHECK
DAV 6 MAY 61
CHECK
DAV 6 MAY 61