


## 3SBC1653A2 Product Details

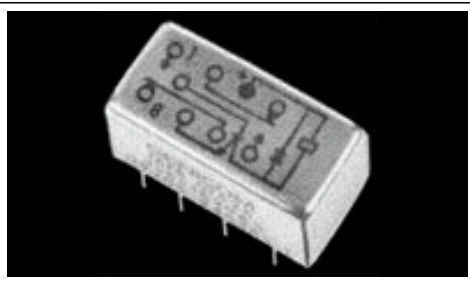


### Military/Aerospace High Performance Relays

[Not EU RoHS or ELV Compliant](#)

#### Product Highlights:

- ? 3SBC 1/5 -Size Relay Series
- ? Input Voltage = 26.5 VDC
- ? Contact Arrangement = 2 Form C, DPDT, 2 C/O
- ? Contact Current Rating = 2 Amps.
- ? Non Polarized, Monostable Coil Magnetic System

[View all Features](#) | [Find Similar Products](#)

**3SBC1653A2**  
(M39016/37 -026M)  
 [Active](#)

#### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

### Documentation & Additional Information

#### Product Drawings:

- ? None Available

#### Catalog Pages/Data Sheets:

- ? None Available

#### Product Specifications:

- ? None Available

#### Application Specifications:

- ? None Available

#### Instruction Sheets:

- ? None Available

#### CAD Files:

- ? None Available

#### Additional Information:

- ? [Product Line Information](#)

#### Related Products:

- ? [Tooling](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- ? Termination Type = Solder Hook Terminals

#### Electrical Characteristics:

- ? Input Voltage (VDC) = 26.5
- ? Contact Current Rating (Amps.) = 2
- ? Coil Polarity Protection Diode = Without
- ? Transistor Driver = Without
- ? Coil Resistance (?) = 1350
- ? MOSFET Driver = Without
- ? Coil Power Measurement = Milliwatts
- ? Coil Power, Nominal (mW) = 520
- ? Actuating System = DC
- ? Shock = 75 G's, 6ms
- ? Vibration = 30G's, 10 to 3000Hz

#### Body Related Features:

- ? [Series](#) = 3SBC 1/5 -Size Relay

#### Contact Related Features:

- ? Mounting Options = Chassis Mount
- ? Enclosure = Hermetically Sealed
- ? Approved Standards = M39016 Qualified, M Level

#### Configuration Related Features:

- ? [Contact Arrangement](#) = 2 Form C, DPDT, 2 C/O
- ? Coil Magnetic System = Non Polarized, Monostable
- ? Coil Suppression Diode = With

#### Industry Standards:

- ? Government/Industry Qualification = Yes
- ? Government/Industry Part Number = M39016/37 -026M
- ? [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- ? [Lead Free Solder Processes](#) = Not suitable for lead free processing

#### Conditions for Usage:

- ? Temperature Range (°C) = -65 – +125

#### Other:

- ? Brand = CII