


REV. 0

DCO 143571

TOL ± .010 UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE	1350 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX., 1.5 VDC MIN.

CUSTOMER DATA SHEET

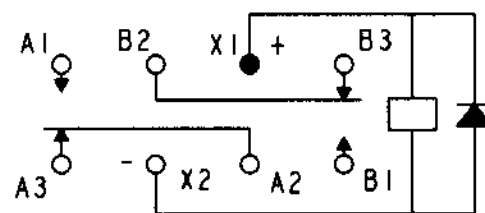

TERMINAL VIEW

ENVIRONMENT:	
VIBRATION	10 Hz TO 3000 Hz @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE 4 MS MAX.
	RELEASE 6 MS MAX.
	CONTACT STABILATION 2.0 MS MAX.

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

DR. ASB 29 MAY 02 *CR 5/29/02*

**CII Technologies**  
advanced control electronic solutions

CUST. QPL

CUST. NO. M39016/37-021P REV. \_\_\_\_\_

"3SBC" RELAY

3SBC1648A2