

REV. 0

DCO 142515

TOL ± .010 UNLESS OTHERWISE SPECIFIED


COIL: @ 25°C	
RESISTANCE	1350 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION	10	CPS TO	3000	CPS @	30	g's
SHOCK	75	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES:	OPERATE 4 MS MAX.
	RELEASE 6 MS MAX.
	CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET

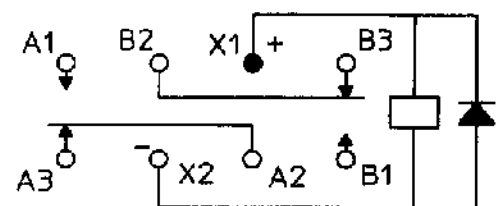

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE
	50,000 OPERATIONS

DR. PBB 11/27/00 CK.TLG 11-27-00

CI Technologies
advanced control electronic solutions

CUST. OPL
CUST. NO. M39016/37-022P REV.

'3SBC' RELAY

3SBC2092A2