


Nylon Round Spacers

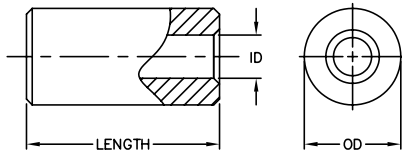

- Molded nylon 6/6.
- An excellent Insulator, the nylon spacer's surface lubricity allows wires to be routed against spacer without fear of chafing the insulation.
- Natural (milky white) finish.
- Relatively low operating temperature.

SCREW NO.	MAJOR DIA.	HOLE SIZE
#2	0.086	0.093
#3	0.099	0.100
#4	0.112	0.120
#5	0.125	0.130
#6	0.138	0.144
#8	0.164	0.169
#10	0.190	0.196
#12	0.216	0.220

LENGTH	O.D.	HOLE CLEARANCE SIZE					LENGTH	O.D.	HOLE CLEARANCE SIZE					
		#2	#4	#6	#8	#10			#2	#4	#6	#8	#10	
0.125	1/8	3/16	9160	9180			.562	9/16	5/16		4065H	4067H	4069H	
		1/4		4000	4001	4002			3/8			4068H	4070H	
		5/16			4065A	4067A			4069A	3/16	9168	9188		
		3/8				4068A			4070A	1/4		4024	4025	4026
0.187	3/16	3/16	9161	9181			.625	5/8	5/16		4065J	4067J	4069J	
		1/4		4003	4004	4005			3/8			4068J	4070J	
		5/16			4065B	4067B			4069B	3/16	9169	9189		
		3/8				4068B			4070B	1/4		4027	4028	4029
0.25	1/4	3/16	9162	9182			.687	11/16	5/16		4065K	4067K	4069K	
		1/4		4006	4007	4008			3/8			4068K	4070K	
		5/16			4065C	4067C			4069C	3/16	9170	9190		
		3/8				4068C			4070C	1/4		4030	4031	4032
0.312	5/16	3/16	9163	9183			.750	3/4	5/16		4065L	4067L	4069L	
		1/4		4009	4010	4011			3/8			4068L	4070L	
		5/16			4065D	4067D			4069D	3/16	9171	9191		
		3/8				4068D			4070D	1/4		4033	4034	4035
0.375	3/8	3/16	9164	9184			.812	13/16	5/16		4065M	4067M	4069M	
		1/4		4012	4013	4014			3/8			4068M	4070M	
		5/16			4065E	4067E			4069E	3/16	9172	9192		
		3/8				4068E			4070E	1/4		4036	4037	4038
0.437	7/16	3/16	9165	9185			.875	7/8	5/16		4065N	4067N	4069N	
		1/4		4015	4016	4017			3/8			4068N	4070N	
		5/16			4065F	4067F			4069F	3/16	9173	9193		
		3/8				4068F			4070F	1/4		4039	4040	4041
0.5	1/2	3/16	9166	9186			.937	15/16	5/16		4065P	4067P	4069P	
		1/4		4018	4019	4020			3/8			4068P	4070P	
		5/16			4065G	4067G			4069G	3/16	9174	9194		
		3/8				4068G			4070G	1/4		4042	4043	4044
0.562	9/16	3/16	9167	9187			1	1	5/16		4065Q	4067Q	4069Q	
		1/4		4021	4022	4023			3/8			4068Q	4070Q	

Nylon Round Spacers