

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0428192233**  
**Status:** **Active**  
**Overview:** Mini-Fit Sr. Power Connectors  
**Description:** 10.00mm Pitch Mini-Fit Sr.™ Header, Single Row, Vertical, 3.18mm PCB Thickness, 0.76µm Gold (Au) Selective Plating, 2 Circuits

**Documents:**

[3D Model](#) [Packaging Specification PK-42819-2375 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-42815-001 \(PDF\)](#)

**Agency Certification**


CSA LR19980  
TUV R72081037  
UL E29179

**General**

Product Family PCB Headers  
Series [42819](#)  
Application Power, Wire-to-Board  
Overview [Mini-Fit Sr. Power Connectors](#)  
Product Name Mini-Fit Sr.™  
UPC 800756512723

**Physical**

Breakaway No  
Circuits (Loaded) 2  
Circuits (maximum) 2  
Color - Resin Black  
Durability (mating cycles max) 100  
First Mate / Last Break No  
Flammability 94V-0  
Glow-Wire Compliant No  
Guide to Mating Part No  
Keying to Mating Part None  
Lock to Mating Part Yes  
Material - Metal Brass  
Material - Plating Mating Gold over Nickel  
Material - Plating Termination Tin over Nickel  
Material - Resin High Temperature Thermoplastic  
Net Weight 5.525/g  
Number of Rows 1  
Orientation Vertical  
PC Tail Length 5.10mm  
PCB Locator Yes  
PCB Retention Yes  
PCB Thickness - Recommended 3.18mm  
Packaging Type Tray  
Pitch - Mating Interface 10.00mm  
Pitch - Termination Interface 10.00mm  
Plating min - Mating 0.762µm  
Plating min - Termination 2.540µm  
Polarized to Mating Part Yes  
Polarized to PCB Yes  
Shrouded Fully  
Stackable No  
Surface Mount Compatible (SMC) No

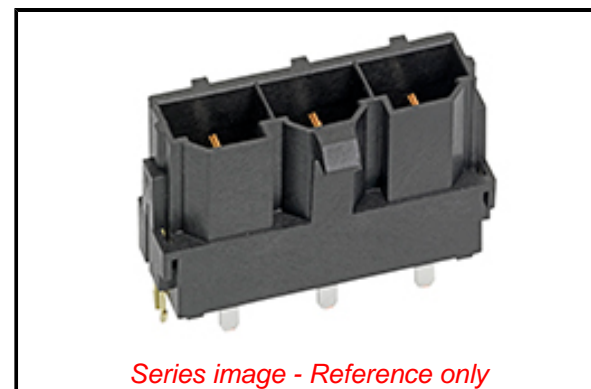

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
ED/30/2017 (7 July  
2017)

**Halogen-Free**

**Status**

**Not Low-Halogen**

**Need more information on product  
environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any  
non-product compliance questions.

China ROHS Green Image  
ELV Not Relevant  
RoHS Phthalates Not Contained

**Search Parts in this Series**

[42819 Series](#)

**Mates With**

Mini-Fit Sr.™ Receptacle Housing with TPA  
[42816](#)

|                               |                 |
|-------------------------------|-----------------|
| Temperature Range - Operating | -40°C to +105°C |
| Termination Interface: Style  | Through Hole    |

**Electrical**

|                               |       |
|-------------------------------|-------|
| Current - Maximum per Contact | 50.0A |
| Voltage - Maximum             | 600V  |

**Solder Process Data**

|  |          |
|--|----------|
| Duration at Max. Process Temperature (seconds) | 030      |
| Lead-free Process Capability                   | SMC&WAVE |
| Max. Cycles at Max. Process Temperature        | 003      |
| Process Temperature max. C                     | 235      |

**Material Info****Reference - Drawing Numbers**

|                         |                |
|-------------------------|----------------|
| Packaging Specification | PK-42819-2375  |
| Product Specification   | PS-42815-001   |
| Sales Drawing           | SDA-42819-0002 |

This document was generated on 08/30/2017

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**