




PRIMARY VOLTAGE

Protection	Reference	Secondary voltage V	Secondary Current mA	No-load voltage V	Ambient Temperature °C	Rating VA
	44121	6	333	10,4	T 70 B	2
	44122	9	222	15,5	T 70 B	2
	44123	12	167	20,7	T 70 B	2
	44124	15	133	25,8	T 70 B	2
	44125	18	111	30,8	T 70 B	2
	44126	24	83	41,4	T 70 B	2
	44127	2 x 6	2 x 167	2 x 10,4	T 70 B	2
	44128	2 x 9	2 x 111	2 x 15,4	T 70 B	2
	44129	2 x 12	2 x 83	2 x 20,7	T 70 B	2
	44130	2 x 15	2 x 67	2 x 25,8	T 70 B	2
	44131*	2 x 18	2 x 56	2 x 30,8	T 70 B	2
	44132*	2 x 24	2 x 42	2 x 41,4	T 70 B	2

* **to be noted** : 2 x 18 V and 2 x 24 non safety transformer approved, conform to EN 61558-2-6 (Isolating transformer).


- Vacuum filling
- Two compartments bobbins
- Self-extinguishing plastics UL 94 VO
- Degree of protection IP 00
- 100 grams weight
- Resin class B CEI 85 (20 000 h testing to CEI 126)
- Inherently short-circuits proof transformer
- 30 V model is VDE EN 61558-2-6 certified (production on request)
- Insulation voltage 4 KV (6 KV MYRRA test)
- 100% tested production
- Certification : CCA procedure on request

1 Secondary winding




Primary winding



2 Secondary windings



Primary winding



Recommended layout for transformers with 1 secondary winding (Allows the use of a transformer with 2 secondary winding)

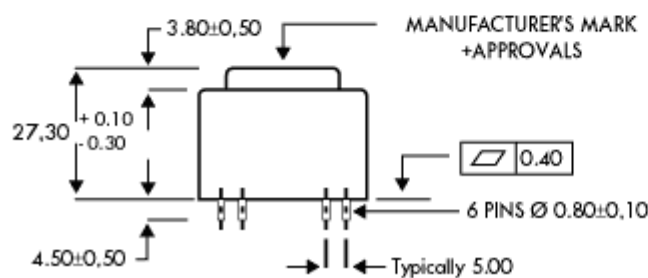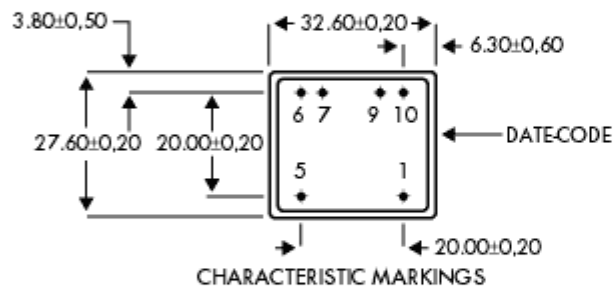

** RECOMMENDED DRILL-HOLE DIAMETER FOR 1,3 mm PINS