




HARNESSING

BREAKOUTS/TRANSITIONS

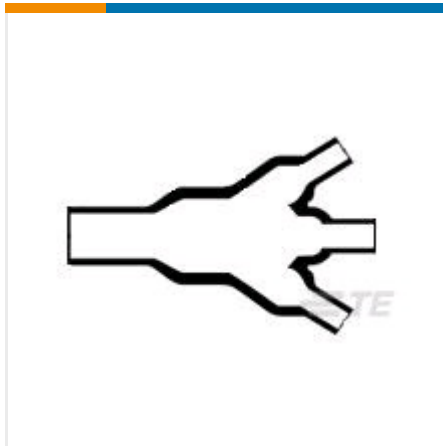

✓ Active

TE CONNECTIVITY (TE)

462A023-3-0

Raychem | CAP , CRPS

462A023-3-0

TE Internal Number: 823774-000

Alias ID: 1-1196433-8

EU RoHS Compliant

EU ELV Compliant

Molded Part Shape One to Three Cables, Y Shape

Wire/Cable OD (mm) 16, 18, 20

Wire/Cable OD (in) .63, .71, .79

Wire/Cable Main Branch OD (mm) 10, 8, 9

Wire/Cable Main Branch OD (in) .31, .35, .39

Wire/Cable Sm Branch OD (mm) 10, 8, 9

Wire/Cable Sm Branch OD (in) .31, .35, .39

Operating Temperature Range -55 – 135 °C [-67 – 275 °F]

PRODUCT DRAWING
English

DOCUMENTATION

Product Drawings

Transition, 1 To 3 Cables

PDF

English

Product Environmental Compliance

Safety Data Sheet

EPS Heat Shrinkable Polymeric Products

PDF

English

EPS Heat Shrinkable Polymeric Products

PDF

French

EPS Heat Shrinkable Polymeric Products

PDF

Italian

EPS Heat Shrinkable Polymeric Products

PDF

Dutch

EPS Heat Shrinkable Polymeric Products

PDF

Danish

EPS Heat Shrinkable Polymeric Products

PDF

German

EPS Heat Shrinkable Polymeric Products

PDF

Norwegian

EPS Heat Shrinkable Polymeric Products

PDF

Spanish

EPS Heat Shrinkable Polymeric Products

PDF

Swedish

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Molded Part Shape One to Three Cables, Y Shape

Product Type Molded Part

Molded Part Type Transition

Size Code 23

Configuration Features

Number of Branches/Legs 3

Body Features

Material Systems Code 10

Adhesive Pre-Coat No

Transition Type 1 to 3 Cables

Material Modified Polyolefin

Pliancy Semi-Rigid

Material Code 3

Dimensions

Inside Diameter Range (Body) 13.2 – 26.9 mm [.52 – 1.059 in]

Inside Diameter Range (Leg 1) 6.9 – 13.2 mm [.27 – .52 in]

Inside Diameter Range (Leg 2) 6.9 – 13.2 mm [.27 – .52 in]

Inside Diameter Range (Leg 3) 6.9 – 13.2 mm [.272 – .52 in]

Usage Conditions

Operating Temperature Range -55 – 135 °C [-67 – 275 °F]

Operation/Application

Power Cable Accessory No

Industry Standards

Government Qualified No

Other

Wire/Cable OD (mm) 16, 18, 20

Wire/Cable OD (in) .63, .71, .79

Wire/Cable Main Branch OD (mm) 10, 8, 9

Wire/Cable Main Branch OD (in) .31, .35, .39

Wire/Cable Sm Branch OD (mm) 10, 8, 9

Wire/Cable Sm Branch OD (in) .31, .35, .39

Fluid/Chemical Resistance Occasional exposure to fluids

Special Requirements Flame Retarded

Adhesive Options S1125 Separate Adhesive

Adhesive Type Adhesive Purchased Separately

Adhesive Code S1125

PRODUCT COMPLIANCE



Statement of Compliance

Statement of Compliance

PDF
