

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0464371315](#)  
**Status:** **Active**  
**Overview:** [EXTreme Ten60Power High-Current Connector](#)  
**Description:** 2.00mm, 5.50mm Pitch EXTreme Ten60Power Right-Angle Plug Assembly with Guide Pins, 4 Power Circuits, 15 Signal Circuits, 4 Power Circuits

**Documents:**

<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary 464361000-TS-000 (PDF)</a>
<a href="#">Product Specification PS-46436-100-001 (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Application Specification AS-46436-100-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**


CSA	LR19980
UL	E29179

**General**

Product Family	PCB Headers
Series	<a href="#">46437</a>
Application	Board-to-Board, Power, Signal
Comments	See PS-46436-100 for details
Overview	<a href="#">EXTreme Ten60Power High-Current Connector</a>
Product Name	EXTreme Ten60Power
UPC	887191123066

**Physical**

(p)ower-(s)ignal Configuration	4p - 15s - 4p
Breakaway	No
Circuits (Loaded)	23
Circuits (maximum)	23
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	No
Mated Height	10.00mm
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	28.633/g
Number of Rows	1, 5
Orientation	Right Angle
PC Tail Length	2.50mm, 3.28mm
PCB Retention	None
PCB Thickness - Recommended	1.58mm
Packaging Type	Tray
Pitch - Mating Interface	2.00mm, 5.50mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

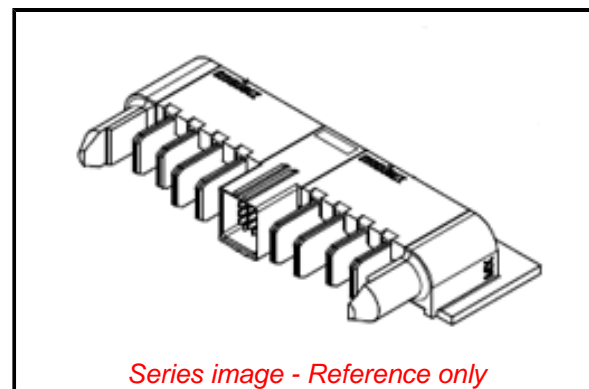

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2020)9139-DC (19  
Jan 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[46437 Series](#)

**Mates With**

[EXTreme Ten60Power Receptacle  
465621232](#)

**Electrical**

Current - Maximum per Contact	2.5A, 60.0A
Voltage - Maximum	600V AC / 250V DC

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	040
Lead-free Process Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

**Material Info****Reference - Drawing Numbers**

Application Specification	AS-46436-100-001
Product Specification	PS-46436-100-001
Test Summary	464361000-TS-000

This document was generated on 03/30/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**