

« Electrical Testers

T6-1000 Electrical Tester

Now you can measure voltage without test leads. Be safer, faster, more efficient. And be everywhere, testing where it used to be impossible

Buy Now

Manuals

★★★★★ 1.3 | (3)

Write a review



Overview

Features

Reviews

Specs

Models

Resources

Measurement Specifications

Function	Requires test leads	Range	Resolution	Accuracy ^[1]
FieldSense ac voltage true-rms	No	1000 V	1 V	± (3 % + 3 counts) 45 Hz - 66 Hz ^{[2][3]}
FieldSense ac current true-rms	No	200.0 A	0.1 A	± (3% + 3 counts) 45 Hz - 66 Hz
FieldSense frequency (Hz)	No	45 Hz – 66 Hz	1 Hz	± (1% + 2 counts) ^[3]
Volts ac true-rms	Yes	1000 V	1 V	± (1.5% + 2 counts) 45 Hz - 66 Hz
Volts dc	Yes	1000 V	1 V	± (1% + 2 counts)
Resistance	Yes	2000 Ω	1 Ω	± (1% + 2 counts)
	Yes	20.00 kΩ	0.01 kΩ	
	Yes	100.0 kΩ	0.1 kΩ	
Safety		1000 V CAT III 600 V CAT IV		

Accuracy^[1]: ± ([% of reading] + [number of least significant digits]). Accuracy is specified for 1 year after calibration, at 18 °C to 28 °C (64 °F to 82 °F) with relative humidity to 90%. AC measurements are ac-coupled, RMS responding.


Accuracy^[2]: Add 3 % without an external ground connection. External ground connection required for user wearing insulated gloves, standing on an insulated ladder, or otherwise insulated from earth ground.

Accuracy^[3]: FieldSense is specified from 16 V to 100 % of range.


General Specifications

Calibration	1-year calibration cycle	
Dimensions	61.1 x 259.3 x 43.8 mm	
Jaw opening	17.8 mm	
Weight	0.35 kg (0.78 lb)	
Temperature	Operating	-10 °C to +50 °C (14 °F to 122 °F)
	Storage	-30 °C to +60 °C (-22 °F to +140 °F)
Altitude	Operating	2,000 m (6,562 feet)
	Storage	10,000 m (32,808 feet)
Relative Humidity	0% to 90%, 5 °C to 30 °C (41 °F to 86 °F)	
	0% to 75%, 30°C to 40 °C (86 °F to 104 °F)	

Featured Video(s)

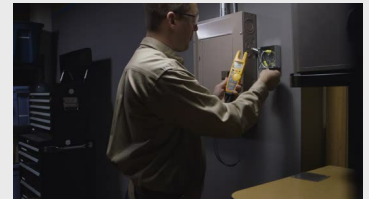

Make FieldSense measurements correctly »

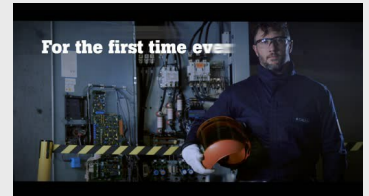

Learn about the T6 Electrical Testers »

All Related Videos, App Notes & More

Product Registration

Contact Us

0% to 45%, 40°C to 50 °C (104 °F to 122 °F)

Battery Type and Life	2 x AA (IEC LR6); 360 hours continuous, typical; 200 hours using FieldSense
Temperature coefficient	0.1 x (specified accuracy) / °C for <18°C or >28 °C
	0.1 x (specified accuracy) / °C for <18°C or >28 °C
Safety	IEC/EN 61010-1: Pollution Degree 2
Electromagnetic Environment	IEC/EN 61326-1: Portable

Products

[Buy Fluke Accessories](#)
[Buy Factory Reconditioned](#)
[Contests and Promotions](#)
[Manuals](#)
[New From Fluke](#)
[Product Registration](#)
[Test Tools Catalog](#)
[Where to Buy](#)

Company

[About Us](#)
[Awards](#)
[Careers](#)
[Companies](#)
[Integrity](#)
[Press](#)
[Supplier Handbook](#)
[Tax Information](#)

Customer Service

[Contact Us](#)
[Directions](#)
[Feedback](#)
[Safety Notices](#)

[Fluke Newsletters
Signup](#)



[Safety Notices](#) [Site Map](#) [Privacy Policy](#) [Fluke Terms of Use](#) [Fluke Terms & Conditions of Sale](#)

Copyright ©1995-2018 Fluke Corporation