

## **MEGOHMMETERS**

## 5000V Digital/Analog



#### Models 5050 & 5060





**Print measurement** reports directly from your computer using **DataView® software** (Models 5060 & 5070)



### DataView<sup>®</sup>

See page 17 for details



#### SPECIFICATIONS

5050	5060
100kΩ 100kΩ to	o 2000GΩ (2TΩ) to 4000GΩ (4TΩ) 110,000GΩ (10TΩ) 110,000GΩ (10TΩ)
40 to 100	ogrammable: 10V: 10V increments; 00V: 100V increments
	-
	of Reading ± 3cts of Reading ± 10cts
	to 1000Vac/dc
	Yes >25V
	stable from 25 to 1000V test voltage range in use
Digital filtering	stabilizes display readings
4kB memory	128kB memory
No	Preset format
20 Readings	Stores over 1500 test results
_	RS-232
No	DataView® (included)
One 9.6V NiMH battery pack (included) Line power: 85 to 256V (50/60Hz)	
	30kΩ t 100kΩ 100kΩ t 300kΩ to 300kΩ to 300kΩ to  Pr 40 to 100 1000 to 51  ±5% 0 ±15% 0  0 t  Yes — adjus depending on Digital filtering  4kB memory No 20 Readings — No  One 9.6V NiM

► PRODUCT INCLUDES

5050, 5060 & 5070

One red, one blue and one black lead with integral 5kV rated hippo clips, one jumper lead for use with guard terminal, rechargeable battery, US 120V power cord, extra large classic tool bag and user manual.



#### ► PC RS-232 Cable

Catalog #2119.45 (optional) DB9 F/F 6 ft null modem cable Catalog #2119.46 DB9 F/F 6 ft cable for serial printer included with Models 5060 & 5070



#### ► DataView Software®

Included with Models 5060 & 5070



CATALOG NO.	DESCRIPTION
2130.20	Megohmmeter Model 5050 (Digital, with Analog Bargraph, Backlight, Alarm, Timer, 500V, 1000V, 2500V, 5000V, Auto DAR/PI/DD)
2130.21	Megohmmeter Model 5060 (Digital, with Analog Bargraph, Backlight, Alarm, Timer, 500V, 1000V, 2500V, 5000V Auto DAR/PI/DD, RS-232 w/DataView® software)




# Data View<sup>®</sup>

**Data Analysis and Reporting Software for Megohmmeters** 




Configure all functions of the Megohmmeter Models 1060, 5060, 5070, 6550 & 6555




- Select test voltage and run tests from your computer with a simple click and execute process
- · Capture and display data in real-time
- Retrieve data from the instrument's memory:
  - Over 1500 insulation resistance measurements
  - Over 4000 resistance measurements
- Display DAR and PI ratios
- · Plot graphs of manual and timed tests
- Include your analysis comments section with the report
- · Store a library of setups for different applications
- Certification of results through report generation
- Free updates are available on our website www.aemc.com



Clear and easy setup from one dialog box for Model 5060.

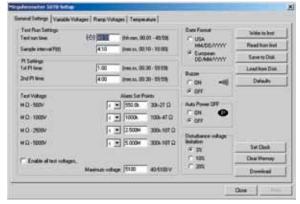

Four tabbed dialog boxes allow for clear and easy setup of all functions of the Model 5070, including setup for variable voltage and alarm set points, as well as step voltage tests and temperature compensation.

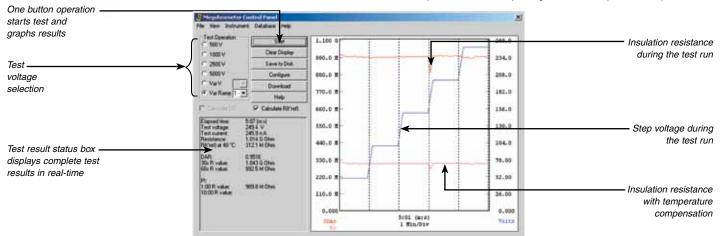

Run test and display text and graphical results from one dialog box. Model 5070 also displays step voltage.

