


P/N	APPLICABLE NOTE(S)
BASIC	
SF	
CC	①
CCSF	①

REVISIONS			
REV	DESCRIPTION	DATE	BY
C	ECO 19617	10.02.06	P.MAO
D	ECO 26011(UPDATE VSWR & I.L.)	07.25.12	DKN

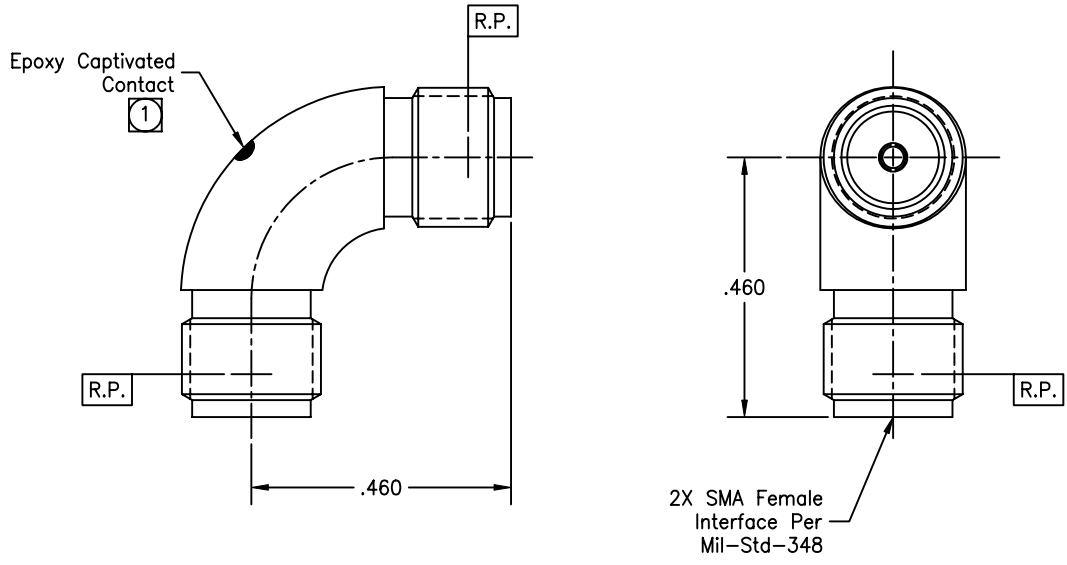

Note(s):
 ① Epoxy is required only on Part No.'s 5095CC and 5095CCSF.

MATERIAL(S):	ELECTRICAL(S):	MECHANICAL(S):	ENVIRONMENTAL(S):
Body: 304 sst per MIL-T-8504 or SAE-AMS-5567. Center Conductor: BeCu alloy per ASTM B-196. Dielectric: PTFE per ASTM D-1710. Epoxy: **Sigma VF type HV. ** Not applicable to Part No.'s 5095 & 5095SF.	Impedance: 50 Ohms nominal. Frequency Range: DC to 18.0 GHz. VSWR: 1.08 + .008 x f(GHz). Insertion Loss: .04 √f(GHz) dB. Working Voltage: 335 Vrms max @ sea level. Dielectric Withstanding Voltage: 1,000 Vrms min. R.F. HiPot Voltage: 670 Vrms min @ 5MHz. Corona Level: 250 Vrms @ 70,000 ft. Insulation Resistance: 5000 MegOhms min. R.F. Leakage: -(65 - fGHz) dB (For CC & CCSF's). R.F. Leakage: -(90 - fGHz) dB (For BASIC & SF's). Contact Resistance: Before Environmental: Center Contact: 3.0 Milliohm max. Outer Contact: 2.0 Milliohm max. After Environmental: Center Contact: 4.0 Milliohm max. Outer Contact: NA.	Mating Characteristics: Interface per Mil-Std-348. Force To Engage & Disengage: Torque: 2 inch-pounds max. Longitudinal Force: NA. Center Contact Retention: Axial Force: 6 pounds min. Connector Durability: 500 cycles min @ 12 cycles/minute max. Permeability: Less than 2.0 mu. Center Contact Captivation: **Axial Force: 6 pounds min. **Radial Torque: 4 inch-ounces min. ** Not applicable to Part No.'s 5095 & 5095SF.	Temperature Range: -65°C to +165°C. Thermal Shock: Mil-Std-202, Method 107, Test Cond. A. Moisture Resistance: Mil-Std-202, Method 106, Insulation resistance at least 200 MegOhms within 5 minutes after removal from humidity. Corrosion: Mil-Std-202, Method 101, Test Cond. B. Vibration: Mil-Std-202, Method 204, Test Cond. D. Shock: Mil-Std-202, Method 213, Test Cond. I.

FINISH(ES):
Body: (For SF & CCSF's): Passivate per ASTM A-967. (For BASIC & CC's): Gold plate per ASTM B-488, type II, code C or D, class .25, over nickel underplate per SAE-AMS-QQ-290. Center Conductor: Gold plate per ASTM B-488, type II, code C or D, class 1.25, over nickel underplate per SAE-AMS-QQ-290.

APPLICABLE CARLISLE IT DOCUMENTS		
WORK STD	PROD INST	ASSY INST
NA	NA	NA

NOTICE

THIS DRAWING EMBODIES A CONFIDENTIAL, PROPRIETARY DESIGN ORIGINATED BY CARLISLE INTERCONNECT TECHNOLOGIES AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS REGARDING THE SAME ARE EXPRESSLY RESERVED. IT IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP FOR A SPECIFIED PURPOSE AND THE RECIPIENT AGREES BY ACCEPTING THIS DRAWING NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING IT TO ANY UNAUTHORIZED PERSON TO INCORPORATE IN OTHER PROJECTS ANY SPECIAL FEATURE PECULIAR TO THIS DESIGN. ALL PATENT RIGHTS HERETO ARE EXPRESSLY RESERVED BY CARLISLE INTERCONNECT TECHNOLOGIES, CERRITOS, CA 90703

TOLERANCES AND NOTES EXCEPT AS NOTED		DIMENSIONS ARE IN INCHES.	
LINEAR	.XX ±.015	ANGULAR	± 1/2°
FRACTION	± 1/32		
1. MACHINE FINISH: 63/ RMS 2. BREAK ALL SHARP EDGES .003 MAX. 3. MACHINED FILLETS - .005 MAX. 4. MACHINED SURFACES SQUARE TO RESPECTIVE AXES WITHIN .005 INCHES PER INCH. 5. MACHINED DIAMETERS CONCENTRIC WITHIN .002 T.I.R. 6. DIMENSIONS TO BE MET BEFORE PLATING. 7. CHAMFER ALL THREADS 45°. 8. THREADS PER 11-26 9. REMOVE FRAYED EDGES ON TEFLON. 10. REMOVE ALL BURRS.			
APPROVAL INITIALS		DATE	
DRAWN BY	JF	DATE	11.12.04
CHECKED BY			
TEST ENGG			
QUALITY			
DESIGN ENGG	P.MAO	DATE	10.02.06
MFG ENGG	PC	DATE	07.25.12
ECO APPRV	DNG	DATE	07.25.12
MATERIAL		SPECIFICATION	
APPROVAL INITIALS		DATE	
CARLISLE Interconnect Technologies Cerritos, CA 90703			
TITLE: SMA FEMALE TO SMA FEMALE RADIUS RIGHT ANGLE ADAPTER			
SCALE: 6:1	DIRECTORY/SUB-DIRECTORY: OL	SHEET 1 of 1	
SIZE: C	CAGE CODE: 30990	DRAWING NO.: 5095	REV. D