

TECH-SPEC®

NEMA 6-15

2-Pole 3-Wire Grounding 15 Amp 250V

Back and Side Wired Industrial Grade Receptacles



BRY5662I

5661I

5684

5678

Features - Specifications RECEPTACLE

- One-piece grounding system including integral self-grounding strap (BRY5662)
- Full-face, wraparound design is molded of high-impact, chemical-resistant nylon
- Heavy-duty wraparound steel yoke locked in for maximum strength and security
- Double-plated yoke (nickel & brass) to resist corrosion
- Back wiring: eight wiring pockets for convenient feed-thru wiring, clamp-type terminals accepts up to #10 wire (5661 & 5684 – four wiring pockets)
- Terminal screws: brass combination Phillips/slotted/ Robertson binding head accepts up to #10 wire
- Approved for CU wire only
- Large green, combination
 Phillips/slotted hex head
 grounding screw with back
 wire clamp

- Center splined bushing interlocks with receptacle body to prevent rotation when fastening wall plates
- Verified under Fed. Spec. #WC596 (where applicable)
- UL Listed File #E2258 Guide #RTRT
- CSA Certified File #LR16215
 Guide #365E1

MALE BASE

- UL Listed File #E1381 –
 Guide #AXUT
- CSA Certified File #LR16215
- Guide #20T2
- NOI

INDUSTRIAL GRADE BACK AND SIDE WIRED

CATALOG NUMBER		DECODIDATION
DUPLEX	SINGLE	DESCRIPTION
BRY5662 BRY5662BLK BRY5662GRY BRY5662I BRY5662RED	5661 5661C 5661BLK 5661GRY 5661I 5661IC 5661RED 5661W 5684	Brown, nylon construction, self-grounding Same as above except with Robertson head screws Black, nylon construction, self-grounding Gray, nylon construction, self-grounding Ivory, nylon construction, self-grounding Same as above except with Robertson head screws Red, nylon construction, self-grounding White, nylon construction, self-grounding Brown, nylon construction, self-grounding, 1.94 (49.3) mounting dim.

CORROSION RESISTANT ©

BRY5662CR	_	Yellow, nylon construction, self-grounding
DICTOOOLOIC		Tollow, fry lott dottott dottori, doll grounding

ISOLATED GROUND ②

|--|


HEAVY-DUTY, SIDE WIRED®

5642 5642I	 Brown, nylon construction, self-grounding lvory, nylon construction, self-grounding

EQUIPMENT DEVICES 3

CATALOG NUMBER	OG NUMBER DESCRIPTION	
5678 5678G 5679	Male equipment base, white nylon cup Male equipment base, white nylon cup, self-grounding strap Female equipment receptacle, white nylon cup	

PRODUCT DIMENSIONS - () Indicates mm dimensions

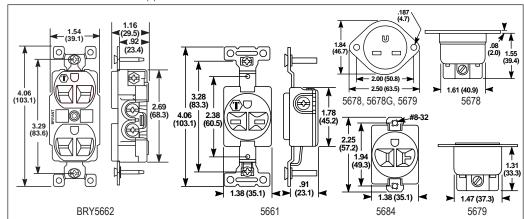

- 5679
- See page I-3 for corrosion resistant Features Specifications.
- See page G-14 for isolated ground Features Specifications.
- ③ See page B-9 for Features Specifications. Specifications are subject to change without notice